

DEPARTMENT OF TRANSPORTATION**National Highway Traffic Safety Administration****49 CFR Part 571**

[Docket No. NHTSA–2015–0056]

RIN 2127–AK97

Federal Motor Vehicle Safety Standards; Electronic Stability Control Systems for Heavy Vehicles

AGENCY: National Highway Traffic Safety Administration (NHTSA), Department of Transportation (DOT).

ACTION: Final rule.

SUMMARY: This document establishes a new Federal Motor Vehicle Safety Standard No. 136 to require electronic stability control (ESC) systems on truck tractors and certain buses with a gross vehicle weight rating of greater than 11,793 kilograms (26,000 pounds). ESC systems in truck tractors and large buses are designed to reduce untripped rollovers and mitigate severe understeer or oversteer conditions that lead to loss of control by using automatic computer-controlled braking and reducing engine torque output.

In 2018, we expect that, without this rule, about 34 percent of new truck tractors and 80 percent of new buses affected by this final rule would be equipped with ESC systems. We believe that, by requiring that ESC systems be installed on the rest of truck tractors and large buses, this final rule will prevent 40 to 56 percent of untripped rollover crashes and 14 percent of loss-of-control crashes. As a result, we expect that this final rule will prevent 1,424 to 1,759 crashes, 505 to 649 injuries, and 40 to 49 fatalities at \$0.1 to \$0.6 million net cost per equivalent life saved, while generating positive net benefits.

DATES: The effective date of this rule is August 24, 2015. The incorporation by reference of certain publications listed in the rule is approved by the Director of the Federal Register as of August 24, 2015.

Petitions for reconsideration: Petitions for reconsideration of this final rule must be received not later than August 7, 2015.

ADDRESSES: Petitions for reconsideration of this final rule must refer to the docket and notice number set forth above and be submitted to the Administrator, National Highway Traffic Safety Administration, 1200 New Jersey Avenue SE., Washington, DC 20590.

FOR FURTHER INFORMATION CONTACT: For technical issues, you may contact Patrick Hallan, Office of Crash

Avoidance Standards, by telephone at (202) 366–9146, and by fax at (202) 493–2990. For legal issues, you may contact David Jasinski, Office of the Chief Counsel, by telephone at (202) 366–2992, and by fax at (202) 366–3820. You may send mail to both of these officials at the National Highway Traffic Safety Administration, 1200 New Jersey Avenue SE., Washington, DC 20590.

SUPPLEMENTARY INFORMATION:**Table of Contents**

- I. Executive Summary
- II. Statutory Authority
- III. Background
- IV. Safety Need
 - A. Heavy Vehicle Crash Problem
 - B. Contributing Factors in Rollover and Loss-of-Control Crashes
 - C. NTSB Safety Recommendations
 - D. Motorcoach Safety Plan
 - E. International Regulation
- V. Summary of the May 2012 NPRM
- VI. Overview of the Comments
- VII. Key Differences Between the Final Rule and the NRPM
- VIII. ESC Requirement
 - A. Whether To Require Stability Control
 - B. Whether To Require ESC or RSC
 - C. Definition of ESC
 - D. Technical Documentation
- IX. Vehicle Applicability and Phase-In
 - A. Trucks
 - 1. Summary of the NPRM
 - 2. Exclusions From ESC Requirement
 - 3. Single-Unit Trucks
 - 4. Compliance Dates
 - B. Buses
 - 1. Summary of the NPRM
 - 2. Buses Built on Truck Chassis
 - (a) Summary of NPRM
 - (b) Summary of Comments
 - (c) NHTSA's Response to Comments
 - 3. Hydraulic-Braked Buses
 - 4. School Buses
 - 5. Transit Buses
 - 6. Minimum Seating Capacity and Seating Configuration
 - 7. Compliance Dates
 - 8. Class 3 Through 6 Buses
 - C. Retrofitting
- X. Performance Testing
 - A. NHTSA's Proposed Performance Tests
 - 1. Characterization Test—SIS
 - 2. Roll and Yaw Stability Test—SWD
 - 3. Lateral Displacement
 - B. Comments on SIS and SWD Maneuvers
 - C. Alternative Maneuvers Considered in the NPRM
 - D. Comments on Alternative Test Maneuvers
 - E. NHTSA Examination and Testing of EMA Maneuvers
 - F. Roll Stability Performance Test—J-Turn Test
 - 1. Rationale for Using J-Turn Test
 - 2. Test Procedure and Performance Requirements
 - 3. System Responsiveness
 - 4. Engine Torque Reduction
 - 5. Roll Stability Performance Requirements
 - G. Yaw Stability
 - H. Understeer
- XI. Test Conditions and Equipment

- A. Outriggers
- B. Automated Steering Machine
- C. Anti-Jackknife System
- D. Control Trailer
- E. Sensors
- F. Ambient Conditions
- G. Road Test Surface
- H. Vehicle Test Weight
- I. Tires
- J. Mass Estimation Drive Cycle
- K. Brake Conditioning
- L. Compliance Options
- M. Data Collection
- XII. ESC Disablement
 - A. Summary of Comments
 - B. Response to Comments
- XIII. ESC Malfunction Detection, Telltale, and Activation Indicator
 - A. ESC Malfunction Detection
 - B. ESC Malfunction Telltale
 - C. Combining ESC Malfunction Telltale With Related Systems
 - D. ESC Activation Indicator
- XIV. Benefits and Costs
 - A. Target Crash Population
 - B. System Effectiveness
 - 1. Summary of the NPRM
 - 2. Summary of Comments and Response
 - (a) ATRI Study
 - (b) Bendix Study
 - 3. Effectiveness Estimate
 - C. Benefits Estimates
 - 1. Safety Benefits
 - 2. Monetized Benefits
 - D. Cost Estimate
 - Truck Tractors
 - Large Buses
 - E. Cost Effectiveness
 - F. Comparison of Regulatory Alternatives
- XV. Regulatory Analyses and Notices
 - A. Executive Order 12866, Executive Order 13563, and DOT Regulatory Policies and Procedures
 - B. Regulatory Flexibility Act
 - C. Executive Order 13132 (Federalism)
 - D. Executive Order 12988 (Civil Justice Reform)
 - E. Protection of Children From Environmental Health and Safety Risks
 - F. Paperwork Reduction Act
 - G. National Technology Transfer and Advancement Act
 - H. Unfunded Mandates Reform Act
 - I. National Environmental Policy Act
 - J. Incorporation by Reference
 - K. Regulatory Identifier Number (RIN)
 - L. Privacy Act

I. Executive Summary

This final rule establishes a new Federal Motor Vehicle Safety Standard (FMVSS) No. 136, *Electronic Stability Control Systems for Heavy Vehicles*, to reduce rollover and loss of directional control of truck tractors and large buses. The standard requires that truck tractors and certain large buses with a gross vehicle weight rating (GVWR) of greater than 11,793 kilograms (26,000 pounds) to be equipped with an electronic stability control (ESC) system that meets the equipment and performance criteria of the standard. ESC systems use engine torque control and computer-controlled

braking of individual wheels to assist the driver in maintaining control of the vehicle and maintaining its heading in situations in which the vehicle is becoming roll unstable (*i.e.*, wheel lift potentially leading to rollover) or experiencing loss of control (*i.e.*, deviation from driver's intended path due to understeer, oversteer, trailer swing or any other yaw motion leading to directional loss of control). In such situations, intervention by the ESC system can assist the driver in maintaining control of the vehicle, thereby preventing fatalities and injuries associated with vehicle rollover or collision.

This final rule is made pursuant to the authority granted to NHTSA under the National Traffic and Motor Vehicle Safety Act ("Motor Vehicle Safety Act"). Under 49 U.S.C. Chapter 301, Motor Vehicle Safety (49 U.S.C. 30101 *et se.*), the Secretary of Transportation is responsible for prescribing motor vehicle safety standards that are practicable, meet the need for motor vehicle safety, and are stated in objective terms. The responsibility for promulgation of Federal motor vehicle safety standards is delegated to NHTSA. This rulemaking also completes NHTSA's rulemaking pursuant to a directive in the Moving Ahead for Progress in the 21st Century Act (MAP-21) that the Secretary consider requiring stability enhancing technology on motorcoaches.¹

There have been two types of stability control systems developed for heavy vehicles. A roll stability control (RSC) system is designed to prevent rollover by decelerating the vehicle using braking and engine torque control. The other type of stability control system is ESC, which includes all of the functions of an RSC system plus the ability to mitigate severe oversteer or understeer conditions by automatically applying brake force at selected wheel-ends to help maintain directional control of a vehicle. To date, ESC and RSC systems for heavy vehicles have been developed for air-braked vehicles. Truck tractors and buses covered by today's final rule make up a large proportion of air-braked heavy vehicles and a large proportion of the heavy vehicles involved in both rollover crashes and total heavy vehicle crashes.

As a result of the data analysis research, we determined that ESC systems can be 40 to 56 percent effective in reducing first-event untripped rollovers and 14 percent effective in eliminating loss-of-control crashes caused by severe oversteer or understeer

conditions. This estimate is based on an update of the estimate presented in a 2011 research note analyzing the effectiveness of ESC systems discussed in the Final Regulatory Impact Analysis (FRIA) accompanying this final rule.²

The agency considered requiring truck tractors and large buses to be equipped with RSC systems. When compared to the ESC requirement in this final rule, RSC systems would cost less than ESC systems, be slightly more cost-effective, but would produce net benefits that are much lower than the net benefits from this final rule. This is because RSC systems are less effective at preventing rollover crashes and much less effective at preventing loss-of-control crashes. We also considered requiring trailers to be equipped with RSC systems. However, this alternative would save many fewer lives, would not be cost-effective, and would not result in net benefits.

This final rule requires ESC systems to meet both definitional criteria and performance requirements. It is necessary to include definitional criteria and require compliance with them because developing separate performance tests to cover the wide array of possible operating ranges, roadways, and environmental conditions would be impractical. The definitional criteria are consistent with those recommended by SAE International and used by the United Nations (UN) Economic Commission for Europe (ECE), and similar to the definition of ESC in FMVSS No. 126, the agency's stability control standard for light vehicles. This definition describes an ESC system for heavy vehicles as one that will enhance both the roll and yaw stability of a vehicle using a computer-controlled system that can receive inputs such as the vehicle's lateral acceleration and yaw rate, and use the information to apply brakes individually, including trailer brakes, and modulate engine torque.

This final rule is applicable to all new typical three-axle truck tractors manufactured on or after August 1, 2017. We believe that two years of lead time is sufficient for these vehicles to be equipped with ESC, given that this is a common platform for which ESC systems are readily available today. We are allowing four years of lead time for all other truck tractors. These vehicles include two-axle vehicles, which have been more recently required to satisfy new, reduced minimum stopping

distance requirements, and severe-service tractors, for which we believe two additional years of lead time is necessary to design and test ESC systems.

This final rule is applicable to buses over 14,969 kilograms (33,000 pounds) GVWR manufactured more than three years after the date of this final rule. Although we proposed a two-year lead time for buses in the NPRM, the Motorcoach Enhanced Safety Act mandates that new rules, including stability enhancing technology, be applicable to all buses manufactured more than three years after publication of a final rule. However, for buses with a GVWR greater than 11,793 kilograms (26,000 pounds) but not more than 14,969 kilograms (33,000 pounds), we believe that three years of lead time is not feasible. Some of these buses include vehicles with body-on-frame construction and hydraulic brakes, for which ESC system availability is not as widespread. Therefore, we are allowing four years of lead time for buses with a GVWR greater than 11,793 kilograms (26,000 pounds) but not more than 14,969 kilograms (33,000 pounds). We believe that including buses with body-on-frame construction and hydraulic brakes in this final rule will spur development of ESC systems for other hydraulic-braked vehicles, including vehicles with a GVWR of greater than 4,536 kilograms (10,000 pounds) but not more than 11,793 kilograms (26,000 pounds), which are not covered by this rulemaking.

We have chosen an alternative performance test to demonstrate an ESC system's ability to mitigate roll instability to what was proposed. After considering the public comments and conducting additional track testing, we have determined that a 150-foot-radius J-turn test maneuver is an efficient means to ensure vehicles maintain roll stability. Like the test maneuver in the NPRM, the J-turn test maneuver is among those available to manufacturers to demonstrate compliance with the UNECE mandate for ESC on trucks and buses.

The J-turn test maneuver, based on an alternative test discussed in the NPRM, involves accelerating to a constant speed on a straight stretch of high-friction track before entering into a 150-foot radius curve. After entering the curve, the driver attempts to maintain the lane. At a speed that is up to 1.3 times the speed at which the ESC system activates, but in no case below 48.3 km/h (30 mph), an ESC system must activate the vehicle's service brakes to slow the vehicle's speed to 46.7 km/h (29 mph) within 3 seconds

² See Wang, Jing-Shiam, "Effectiveness of Stability Control Systems for Truck Tractors" (January 2011) (DOT HS 811 437); Docket No. NHTSA-2010-0034-0043.

¹ Pub. L. 112-141 (July 6, 2012).

after entering the curve and 45.1 km/h (28 mph) within 4 seconds after entering the curve. Additional J-turn tests are conducted to ensure that an ESC system is able to reduce engine torque.

The performance metric for the J-turn (reduction in forward speed) is easy to obtain and serves as a proxy for absolute lateral acceleration. Lateral acceleration on a fixed-radius curve is a function of forward velocity. On a 150-foot radius curve, a forward speed of 48.3 km/h (30 mph) corresponds to a lateral acceleration of approximately 0.4g. Based on prior NHTSA testing, we have found that 0.4g represents the margin of lateral stability on a typical fully loaded truck tractor with the loads having a high center of gravity (CG). That is, lateral acceleration levels greater than 0.4g (or forward speeds on a 150-foot radius curve of greater than 48.3 km/h (30 mph)) on a typical truck tractor are likely to lead to lateral instability, wheel lift, and possible rollover. However, lateral acceleration levels less than 0.4g (or forward speeds on a 150-foot radius curve of less than 48.3 km/h (30 mph)) on a typical truck tractor are unlikely to lead to lateral instability, wheel lift, and rollover.

This final rule includes a requirement proposed in the NPRM that an ESC system be able to mitigate yaw instability. This requirement is similar to one proposed in the NPRM, and adopted in this final rule, requiring an ESC system be able to mitigate understeer. However, this final rule does not include any performance test to evaluate the ability of an ESC system to mitigate yaw instability. Although the NPRM included the sine with dwell (SWD) maneuver to test both roll and yaw instability, we have decided not to include it in this final rule. The SWD maneuver is only a partial test of the ability to mitigate yaw instability. It tests an ESC system's ability to mitigate loss of control resulting from oversteer conditions, but not its ability to mitigate understeer, which is the most common loss-of-control scenario for heavy vehicles. NHTSA has been unable to develop a test for understeer mitigation. As argued by many commenters, performing the SWD maneuver entails substantial time and instrumentation burdens. We do not believe that this additional time and cost is justified solely to test an ESC system's ability to mitigate yaw instability caused by oversteer conditions when a majority of the benefits of this final rule are derived from rollover prevention and the majority of benefits attributed to prevented loss-of-control crashes in heavy vehicles are derived from understeer mitigation, which would not

have been tested in the SWD maneuver. However, we are continuing to examine possible yaw performance maneuvers, including the SWD maneuver, to test yaw stability performance in the future.

The decision to adopt the J-turn test maneuver as the performance test in this final rule has caused us to reconsider test conditions and equipment. However, many aspects of testing remain identical to the proposal. For example, we will conduct performance testing on a high-friction surface. We believe that the potential for variance in surface friction on a low-friction surface may introduce variabilities in ESC testing that may lead to inconsistent results. We are still equipping all test vehicles with outriggers and truck tractors with anti-jackknife systems for the safety of test drivers.

On the other hand, many proposed aspects of testing had to be modified to accommodate the J-turn test maneuver. Because the J-turn test maneuver is a path-following maneuver, we are not using a steering wheel controller that was proposed in the NPRM. We noted potential variabilities in the proposed specification for the control trailer. However, because the performance metric for the J-turn test maneuver is different than the proposed SWD requirements, those variabilities identified in the NPRM that were related to the SWD maneuver are no longer relevant. We have modified the loading condition to load the vehicle to its GVWR because that is the most severe test condition with the J-turn test maneuver. Finally, the number of sensors used in testing is substantially reduced because the vehicle's actual lateral acceleration throughout the maneuver does not need to be measured.

We have considered comments on the issue of allowing ESC system disablement. This final rule does not allow the driver to disable the ESC system at speeds higher than 20 km/h (12.4 mph), which we have defined as the minimum speed at which an ESC system must operate. Many of the comments we received arguing in favor of allowing ESC system disablement were, in fact, arguing for disablement of traction control to allow a vehicle to start moving on certain surfaces with low friction such as on snow, ice, or off-road conditions. However, we do not believe that an ESC system would prevent a heavy vehicle from moving in these circumstances. Rather, we believe that manufacturers may wish to disable an automatic traction control system to allow the vehicle to move. NHTSA does not require traction control systems, nor does NHTSA prohibit the installation of

an on/off switch for a traction control system. We understand that traction control systems are related to ESC systems in that they can control engine torque output and activate the brakes on individual wheel ends. However, we do not find these arguments to be a compelling reason to allow an ESC system deactivation switch or automatic deactivation of ESC systems at speeds above 20 km/h (12.4 mph).

This final rule requires that an ESC system be able to detect a malfunction and provide a driver with notification of a malfunction by means of a telltale. This requirement is similar to the malfunction detection and telltale requirements for light vehicles in FMVSS No. 126. After considering public comments, we have changed the vehicle depicted on the telltale to better represent the profile of a combination vehicle or bus rather than a passenger car.

Based on the agency's effectiveness estimates, this final rule will prevent 1,424 to 1,759 crashes per year resulting in 505 to 649 injuries and 40 to 49 fatalities. This final rule will also result in significant monetary savings as a result of the prevention of property damage and travel delays.

Without this final rule, we project that, in 2018, manufacturers would have equipped 33.9 percent of truck tractors with ESC systems, 21.3 percent of truck tractors would be equipped with RSC systems, and 80.0 percent of large buses would be equipped with ESC systems. Based on the agency's cost teardown study, the average ESC system cost is estimated to be \$585 for truck tractors and \$269 for large buses. The incremental cost of installing an ESC system in place of an RSC system on a truck tractor is estimated to be \$194. Based upon the agency's estimate that 150,000 truck tractors and 2,200 buses covered by this final rule will be manufactured annually, the agency estimates the total technology cost of this final rule to be approximately \$45.6 million.

This final rule is highly cost effective and beneficial. The net benefits of this final rule are estimated to range from \$412 to \$525 million at the 3 percent discount rate and \$312 to \$401 million at the 7 percent discount rate. The agency estimates that this rule will result in societal economic savings resulting from preventing crashes, reducing congestion, and preventing property damage, such that the net cost of this final rule range from \$3.6 to \$12.3 million at a 3 percent discount rate and from \$12.3 to \$19.2 million at 7 percent discount rate. As a result, the net cost per equivalent life saved ranges

from \$0.1 to \$0.3 million at the 3 percent discount rate and from \$0.3 to \$0.6 million at the 7 percent discount

rate. The costs and benefits of this rule are summarized in Table 1.

TABLE 1—ESTIMATED ANNUAL COST, BENEFITS, AND NET BENEFITS OF THE FINAL RULE
[In millions of 2013 dollars]

	Vehicle costs	Societal economic savings	VSL savings	Total monetized savings	Cost per equivalent live saved	Net benefits
At 3% Discount	\$45.6	\$33.3–\$42.1	\$424–\$528	\$458–\$571	\$0.1–\$0.3	\$412–\$525
At 7% Discount	45.6	26.4–33.3	332–413	358–446	0.3–\$0.6	312–401

II. Statutory Authority

NHTSA is issuing this final rule under the National Traffic and Motor Vehicle Safety Act (“Motor Vehicle Safety Act”). Under 49 U.S.C. Chapter 301, Motor Vehicle Safety (49 U.S.C. 30101 *et seq.*), the Secretary of Transportation is responsible for prescribing motor vehicle safety standards that are practicable, meet the need for motor vehicle safety, and are stated in objective terms. “Motor vehicle safety” is defined in the Motor Vehicle Safety Act as “the performance of a motor vehicle or motor vehicle equipment in a way that protects the public against unreasonable risk of accidents occurring because of the design, construction, or performance of a motor vehicle, and against unreasonable risk of death or injury in an accident, and includes nonoperational safety of a motor vehicle.” “Motor vehicle safety standard” means a minimum performance standard for motor vehicles or motor vehicle equipment. When prescribing such standards, the Secretary must consider all relevant, available motor vehicle safety information. The Secretary must also consider whether a standard is reasonable, practicable, and appropriate for the types of motor vehicles or motor vehicle equipment for which it is prescribed and the extent to which the standard will further the statutory purpose of reducing traffic accidents and associated deaths. The responsibility for promulgation of Federal motor vehicle safety standards is delegated to NHTSA.

On July 6, 2012, President Obama signed MAP–21, which incorporated in Subtitle G the “Motorcoach Enhanced Safety Act of 2012.” Section 32703(b)(3) of the Act states that, not later than two years after the date of enactment of the Act, the Secretary shall consider requiring motorcoaches to be equipped with stability enhancing technology, such as electronic stability control and torque vectoring, to reduce the number and frequency of rollover crashes of

motorcoaches. The Secretary was directed to prescribe regulations that address stability enhancing technology if the Secretary determines that such standards meet the requirements and considerations set forth in subsections (a) and (b) of 49 U.S.C. 30111. These requirements are discussed in the preceding paragraph.

The Motorcoach Enhanced Safety Act directs the Secretary to consider various other motorcoach rulemakings, in provided timeframes, related to safety belts,³ improved roof support standards, advanced glazing standards and other portal improvements to prevent partial and complete ejection of motorcoach passengers, tire pressure monitoring systems, and tire performance standards. The Act also includes provisions on fire research, interior impact protection, enhanced seating designs, and collision avoidance systems, and the consideration of rulemaking based on such research. There also are provisions in the Motorcoach Enhanced Safety Act relating to improved oversight of motorcoach service providers, including enhancements to driver licensing and training programs and motorcoach inspection programs.

In section 32702, “Definitions,” of the Motorcoach Enhanced Safety Act, the Act states at section 32702(6) that “the term ‘motorcoach’ has the meaning given the term ‘over-the-road bus’ in section 3038(a)(3) of the Transportation Equity Act for the 21st Century (TEA–21) (49 U.S.C. 5310 note), but does not include a bus used in public transportation provided by, or on behalf of, a public transportation agency; or a school bus, including a multifunction school activity bus.” Section 3038(a)(3) states: “The term ‘over-the-road bus’ means a bus characterized by an

elevated passenger deck located over a baggage compartment.”

Under section 32703(e)(1) of the Motorcoach Enhanced Safety Act, any regulation prescribed in accordance with section 32703(b) (and several other subsections) shall apply to all motorcoaches manufactured more than three years after the date on which the regulation is published as a final rule, take into account the impact to seating capacity of changes to size and weight of motorcoaches and the ability to comply with State and Federal size and weight requirements, and be based on the best available science.

Prior to enactment of the Motorcoach Enhanced Safety Act, the agency’s May 23, 2012 NPRM proposed requiring truck tractors and large buses with a GVWR of greater than 11,793 kg (26,000 lb.) to be equipped with stability enhancing technology. Thus, the agency had already considered requiring motorcoaches to have stability enhancing technology, and had proposed requiring the same, prior to the enactment of the Motorcoach Enhanced Safety Act.

The agency does not interpret the Motorcoach Enhanced Safety Act on its own as a mandate to require stability enhancing technology on over-the-road buses. With respect to rollover crash avoidance, section 32703(b)(3) of the Motorcoach Enhanced Safety Act directs the agency to “consider requiring” stability enhancing technology such as electronic stability control or torque vectoring on over-the-road buses. However, the agency was also directed in section 32703(b) to prescribe a regulation if the Secretary determines that such standards meet the requirements and considerations for issuing a motor vehicle safety standard under the Motor Vehicle Safety Act. The Motorcoach Enhanced Safety Act does not provide independent statutory authority to require stability enhancing technologies on over-the-road buses.⁴

³ Pursuant to the Motor Vehicle Safety Act and the Motorcoach Enhanced Safety Act, NHTSA published a final rule requiring lap/shoulder seat belts for each passenger seating position on all new over-the-road buses, and in new buses other than over-the-road buses with a GVWR greater than 11,793 kilograms (26,000 pounds) beginning on November 26, 2016. 78 FR 70415 (Nov. 25, 2013).

⁴ In contrast, the Motorcoach Enhanced Safety Act specifically mandated that the agency prescribe

Thus, any mandate requiring stability enhancing technology pursuant to the Motorcoach Enhanced Safety Act is dependent on satisfying the considerations and requirements of the Motor Vehicle Safety Act.

In issuing this final rule, we took into account the considerations of section 32703(e)(1) of the Motorcoach Enhanced Safety Act regarding the implementation of regulations prescribed in accordance with subsection (b)(3). Unlike subsection (b)(3), subsection (e)(1) does not use permissive language. Because this final rule is issued in accordance with subsection (b)(3), we believe the considerations regarding the application of regulations in subsection (e)(1) must be addressed in this rulemaking. Nonetheless, because the Motorcoach Enhanced Safety Act contains no independent statutory authority in support of a mandate for stability enhancing technology, the considerations in subsection (e)(1) are constrained by the agency's authority to issue standards under the Motor Vehicle Safety Act. Therefore, where the considerations in subsection (e)(1) conflict with any requirements and considerations set forth in subsections (a) and (b) of 49 U.S.C. 30111, the requirements of the Motor Vehicle Safety Act supersede the Motorcoach Enhanced Safety Act.⁵

This final rule is practicable, meets a need for motor vehicle safety, and is stated in objective terms. With respect to the considerations of the Motorcoach Enhanced Safety Act, we believe that Congress intended that a final rule based on the 2012 NPRM would complete the rulemaking proceeding specified in section 32703(b)(3) of the Act. Electronic stability control will reduce the number and frequency of rollover crashes of motorcoaches. This rulemaking is based on the best available science. Further, we have considered the impact to seating capacity and changes to size and weight of motorcoaches, and we believe that this rule will have no effect on these considerations. ESC systems will add less than 10 pounds of additional weight to over-the-road buses.⁶

Although the Motorcoach Enhanced Safety Act also suggested torque vectoring as a possible technology to consider requiring on motorcoaches, we did not propose requiring torque vectoring in the May 2012 NPRM, and it is beyond the scope of this rulemaking

proceeding. Even if it was within scope to require torque vectoring, the agency would not do so in this rulemaking. The agency's understanding of torque vectoring is that it is a technology that allows a vehicle's differential or brakes to vary the power supplied to the drive axle wheel end. In contrast, ESC systems activate the vehicle's service brakes to vary the braking on each wheel end combined with the ability to reduce engine torque (which reduces power on drive axle wheel ends). In the May 2012 NPRM, we noted that, all things being equal, a vehicle entering a curve at a higher speed is more likely to roll over than a vehicle entering a curve at a lower speed.⁷ Once a vehicle is about to enter a curve at a high enough speed that would generate sufficient lateral acceleration to cause a possible rollover, the most effective manner to vary the individual wheel speeds in an attempt to prevent the rollover is primarily through the activation of a vehicle's service brakes along with the decrease in engine power and the use of engine braking. Torque vectoring systems that are differential-based would not provide adequate braking power and would be less effective than ESC at slowing a vehicle down to allow it to maneuver a curve without rolling over. Likewise, brake-based torque vectoring systems would be less effective than ESC for braking in a curve. In brake-based systems, the inside wheels are braked during cornering in order to prevent any loss of traction, which could result because there is less weight on those wheel during cornering. ESC provides braking to both the inside and outside wheels of the vehicle resulting in better brake performance.

III. Background

In the NPRM, we provided a detailed explanation of how rollovers occur, how stability control technologies such as roll stability control and electronic stability control function and reduce rollover, examples of situations in which stability control systems may not be effective, and the differences between stability enhancing technology on light vehicles and heavy vehicles.⁸ This section is a summary of that information.

A turning maneuver initiated by the driver's steering input results in a vehicle response that can be broken down into two phases. As the steering

wheel is turned, the displacement of the front wheels generates a slip angle at the front wheels and a lateral force is generated. That lateral force leads to vehicle rotation, and the vehicle starts rotating about its center of gravity. Then, the vehicle's yaw causes the rear wheels to experience a slip angle. That causes a lateral force to be generated at the rear tires, which causes vehicle rotation. All of these actions establish a steady-state turn in which lateral acceleration and yaw rate are constant. In combination vehicles, which typically consist of a tractor towing a trailer, an additional phase is the turning response of the trailer, which is similar to, but slightly delayed, when compared to the turning response of the tractor.

If the lateral forces generated at either the front or the rear wheels exceed the friction limits between the road surface and the tires, the result will be a vehicle loss-of-control in the form of severe understeer (loss of traction at the steer tires) or severe oversteer (loss of traction at the rear tires). In a combination vehicle, a loss of traction at the trailer wheels would result in the trailer swinging out of its intended path. Conversely, rollover conditions occur on a vehicle when high lateral forces are generated at the tires from steering or sliding and result in a vehicle lateral acceleration that exceeds the rollover threshold of the vehicle.

High lateral acceleration is one of the primary causes of rollovers. Figure 1 depicts a simplified untripped rollover condition. As shown, when the lateral force (*i.e.*, lateral acceleration) is sufficiently large and exceeds the roll stability threshold of the tractor-trailer combination vehicle, the vehicle will roll over. Many factors related to the drivers' maneuvers, heavy vehicle loading conditions, vehicle handling characteristics, roadway design, and road surface properties would result in various lateral accelerations and influences on the rollover propensity of a vehicle. For example, given other factors are equal, a vehicle entering a curve at a higher speed has a higher lateral acceleration and, as a result, is more likely to roll than a vehicle entering the curve at a lower speed. Also, transporting a high-CG load would increase the rollover probability more than transporting a relatively lower CG load.

regulations requiring safety belts to be installed at each designated seating position on all over-the-road buses.

⁵ See section IX.B below for such a finding with respect to the application of this final rule to buses

with a GVWR of 14,969 kilograms (33,000 pounds) or less.


⁶ "Report: Cost and Weight Analysis of Electronic Stability Control (ESC) and Roll Stability Control

for Heavy Trucks," Docket No. NHTSA-2011-0066-0034.

⁷ 77 FR 30771.

⁸ 77 FR 30771-74.

Figure 1: Rollover Condition

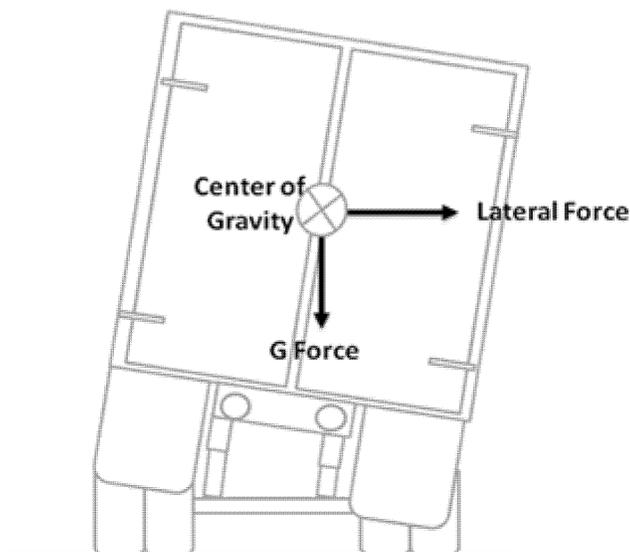

Stability control technologies help a driver maintain directional control and help to reduce roll instability. Two types of heavy vehicle stability control technologies have been developed. One such technology is roll stability control or RSC. RSC systems are available for truck tractors and for trailers. A tractor-based RSC system consists of an electronic control unit (ECU) that is mounted on a vehicle and continually monitors the vehicle's speed and lateral acceleration based on an accelerometer, and estimates vehicle mass based on engine torque information.⁹ The ECU continuously estimates the roll stability threshold of a vehicle, which is the lateral acceleration above which a combination vehicle will roll over. When the vehicle's lateral acceleration approaches the roll stability threshold, the RSC system intervenes. Depending on how quickly the vehicle is approaching the estimated rollover threshold, the RSC system intervenes by one or more of the following actions: Decreasing engine power, using engine braking, applying the tractor's drive-axle brakes, or applying the trailer's brakes. When RSC systems apply the trailer's brakes, they use a pulse modulation protocol to prevent wheel lockup because tractor stability control systems

cannot currently detect whether or not the trailer is equipped with ABS.

An RSC system can reduce rollovers, but is not designed to help to maintain directional control of a truck tractor. Nevertheless, RSC systems may provide some additional ability to maintain directional control in some scenarios, such as in a low-center-of-gravity scenario, where an increase in a lateral acceleration may lead to yaw instability rather than roll instability.

In comparison, a trailer-based RSC system has an ECU mounted on the trailer, which typically monitors the trailer's wheel speeds, the trailer's suspension to estimate the trailer's loading condition, and the trailer's lateral acceleration. A trailer-based RSC system works similarly to a tractor-based system. However, a trailer-based RSC system can only apply the trailer brakes to slow a combination vehicle, whereas a tractor-based RSC system can apply brakes on both the tractor and trailer.

The other type of stability control systems available for truck tractors and large buses is an ESC system. An ESC system incorporates all of the inputs of an RSC system. However, it also has two additional sensors to monitor a vehicle for loss of directional control, which may result due to either understeer or oversteer. The first additional sensor is

a steering wheel angle sensor, which senses the driver's steering input.^{10 11} The other is a yaw rate sensor, which measures the actual turning movement of the vehicle. These system inputs are monitored by the system's ECU, which estimates when the vehicle's directional response begins to deviate from the driver's steering command, either by oversteer or understeer. An ESC system intervenes to restore directional control by taking one or more of the following actions: Decreasing engine power, using engine braking, selectively applying the brakes on the truck tractor to create a counter-yaw moment to turn the vehicle back to its steered direction, or applying the brakes on the trailer. An ESC system enhances the RSC functions because it has the added information from the steering wheel angle and yaw rate sensors, as well as more braking power because of its additional capability to apply the tractor's steer axle brakes.¹²

Figure 2 illustrates the oversteering and understeering conditions. While Figure 2 may suggest that a particular vehicle loses control due to either oversteer or understeer, it is quite possible that a vehicle could require both understeering and oversteering interventions during progressive phases of a complex crash avoidance maneuver such as a double lane change.

⁹RSC systems are not presently available for large buses.


¹⁰Because ESC systems must monitor steering inputs from the tractor, ESC systems are not available for trailers.

¹¹Some RSC systems also use a steering wheel angle sensor, which allows the system to identify potential roll instability events earlier.

¹²This is a design strategy to avoid the unintended consequences of applying the brakes on

the steering axle without knowing where the driver is steering the vehicle.

Figure 2: Loss-of-Control Conditions

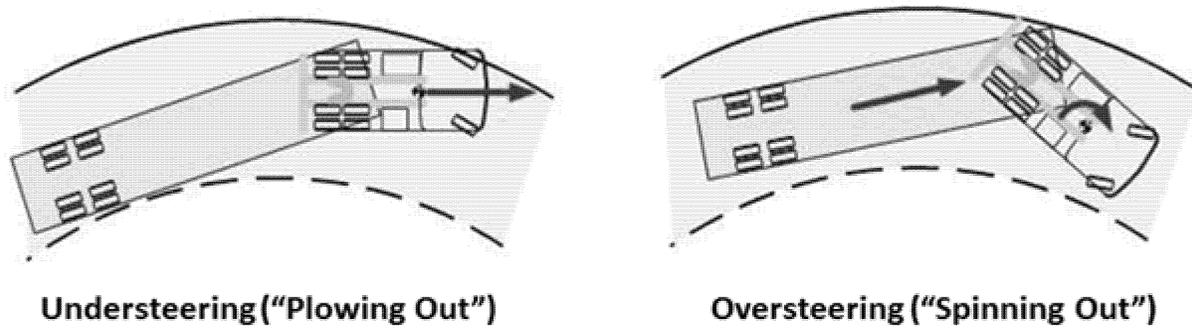

Understeering. The left side of Figure 2 shows a truck tractor whose driver has lost directional control during an attempt to drive around a right curve. The ESC system momentarily applies the right rear brake, creating a clockwise rotational force, to turn the heading of the vehicle back to the correct path. It will also reduce engine power to gently slow the vehicle and, if necessary, apply additional brakes (while maintaining the uneven brake force to create the necessary yaw moment).

Oversteering. The right side of Figure 2 shows that the truck tractor whose driver has lost directional control during an attempt to drive around a right curve. In a vehicle equipped with ESC, the system immediately detects that the vehicle's heading is changing more quickly than appropriate for the driver's intended path (*i.e.*, the yaw rate is too high). To counter the clockwise rotation of the vehicle, it momentarily applies the left front brake, thus creating a counter-clockwise counter-rotational force and turning the heading of the vehicle back to the correct path. It will also reduce engine power to gently slow the vehicle and, if necessary, apply additional brakes (while maintaining the uneven brake force to create the necessary yaw moment). The ESC activation can be so subtle that the driver does not perceive the need for steering corrections.

A stability control system will not prevent all rollover and loss-of-control crashes. A stability control system has the capability to prevent many untripped on-road rollovers and first-event loss-of-control events. Nevertheless, there are real-world situations in which stability control systems may not be as effective in avoiding a potential crash. Such situations include:

- Off-road maneuvers in which a vehicle departs the roadway and encounters a steep incline or an unpaved surface that significantly

reduces the predictability of the vehicle's handling

- Entry speeds that are much too high for a curved roadway or entrance/exit ramp
- Cargo load shifts or liquid sloshing within the trailer during a steering maneuver
- Vehicle tripped by a curb or other roadside object or barrier
- Truck rollovers that are the result of collisions with other motor vehicles
- Inoperative antilock braking systems—the performance of stability control systems depends on the proper functioning of ABS
- Brakes that are out-of-adjustment or other defects or malfunctions in the ESC, RSC, or brake system.
- Maneuvers during tire tread separation or sudden tire deflation events.

On April 6, 2007, the agency published a final rule that established FMVSS No. 126, *Electronic Stability Control Systems*, which requires all passenger cars, multipurpose passenger vehicles, trucks and buses with a GVWR of 4,536 kg (10,000 lb.) or less to be equipped with an electronic stability control system beginning in model year 2012.¹³ The system must be capable of applying brake torques individually at all four wheels, and must comply with the performance criteria established for stability and responsiveness when subjected to the sine with dwell steering maneuver test. For light vehicles, the focus of the FMVSS No. 126 is on addressing yaw instability, which can assist the driver in preventing the vehicle from leaving the roadway, thereby preventing fatalities and injuries associated with crashes involving tripped rollover, which often occur when light vehicles run off the road. The standard does not include any equipment or performance requirements for roll stability.

The dynamics of light vehicles and heavy vehicles differ in many respects.

First, on light vehicles, the yaw stability threshold is typically lower than the roll stability threshold. This means that a light vehicle making a crash avoidance maneuver, such as a lane change on a dry road, is more likely to reach its yaw stability threshold and lose directional control before it reaches its roll stability threshold and rolls over. On a heavy vehicle, however, the roll stability threshold is lower than the yaw stability threshold in most operating conditions, primarily because of its higher center-of-gravity height.¹⁴ As a result, there is a greater propensity for a heavy vehicle, particularly in a loaded condition, to roll during a severe crash avoidance maneuver or when negotiating a curve, than to become yaw unstable, as compared with light vehicles.

Second, a tractor-trailer combination unit is comprised of a power unit and one or more trailing units with one or more articulation points. In contrast, although a light vehicle may occasionally tow a trailer, a light vehicle is usually a single rigid unit. The tractor and the trailer have different center-of-gravity heights and different lateral acceleration threshold limits for rollover. A combination vehicle rollover frequently begins with the trailer where the rollover is initiated by trailer wheel lift.

Third, due to greater length, mass, and mass moments of inertia of heavy vehicles, they respond more slowly to steering inputs than do light vehicles. The longer wheelbase of a heavy vehicle, compared with a light vehicle, results in a slower response time, which gives the stability control system the opportunity to intervene and prevent rollovers.

Finally, the larger number of wheels on a heavy vehicle, as compared to a light vehicle, makes heavy vehicles less

¹⁴ One instance where a heavy vehicle's yaw stability threshold might be higher than its roll stability threshold is in an unloaded condition on a low-friction road surface.

likely to become yaw unstable on dry road surface conditions.

IV. Safety Need

A. Heavy Vehicle Crash Problem

This section presents data on the safety problem associated with rollover and loss of control of heavy vehicles. The information has been updated from similar information contained in the NPRM. For the specific target population used to support the agency's system effectiveness and estimated benefits, see Section XIV.

The *Traffic Safety Facts 2012* reports that tractor trailer combination vehicles are involved in about 72 percent of the fatal crashes involving large trucks, annually.¹⁵ According to FMCSA's *Large Truck and Bus Crash Facts 2011*, these vehicles had a fatal crash involvement rate of 1.46 crashes per 100 million vehicle miles traveled during 2011, whereas single-unit trucks had a fatal crash involvement rate of 1.00 crashes per 100 million vehicle miles traveled.¹⁶ Combination vehicles represent about 24 percent of large trucks registered but travel 61 percent of the large truck miles, annually. Traffic tie-ups resulting from loss-of-control and rollover crashes also contribute to in millions of dollars of lost productivity and excess energy consumption each year.

According to *Traffic Safety Facts 2012*, the overall crash problem for tractor trailer combination vehicles in that year was approximately 180,000 crashes, 42,000 of which involve injury. The overall crash problem for single-unit trucks is nearly as large—in 2012, there were approximately 154,000 crashes, 35,000 of which were injury crashes. However, the fatal crash involvement for truck tractors is much higher. In 2011, there were 2,736 fatal combination truck crashes and 1,066 fatal single-unit truck crashes.

The rollover crash problem for combination trucks is much greater than for single-unit trucks. In 2011, there were approximately 8,000 crashes involving combination truck rollover and 5,000 crashes involving single-unit truck rollover. As a percentage of all crashes, combination trucks are involved in rollover crashes at a higher rate compared to single-unit trucks. Approximately 4.6 percent of all combination truck crashes were rollovers, but 3.2 percent of single-unit truck crashes were rollovers.

¹⁵ DOT HS 812 032, available at <http://www.nrd.nhtsa.dot.gov/Pubs/812032.pdf>.

¹⁶ FMCSA–RRA–13–049 (Oct. 2013), available at <http://www.fmcsa.dot.gov/sites/fmcsa.dot.gov/files/docs/LargeTruckandBusCrashFacts2011.pdf>.

Combination trucks were involved in 3,000 injury crashes and 373 fatal crashes, and single-unit trucks were involved in 3,000 injury crashes and 194 fatal crashes.

According to FMCSA's *Large Truck and Bus Crash Facts 2011*, cross-country intercity buses were involved in 39 of the 242 fatal bus crashes in 2011. The bus types presented in the crash data include school buses, cross-country intercity buses, transit buses, van-based buses, and other buses. From 2002 to 2011, cross-country intercity buses, on average, accounted for approximately 12 percent of all buses involved in fatal crashes, whereas transit buses and school buses accounted for 34 percent and 40 percent, respectively, of all buses involved in fatal crashes. However, most of the transit bus and school bus crashes are not rollover or loss-of-control crashes that ESC systems are capable of preventing. Fatal rollover and loss-of-control crashes are a subset of these crashes.

There are many more fatalities in buses with a GVWR greater than 11,793 kg (26,000 lb.) compared to buses with a GVWR between 4,536 kg and 11,793 kg (10,000 lb. and 26,000 lb.).¹⁷ In the 10-year period between 2000 and 2009, there were 42 fatalities on buses with a GVWR between 4,536 kg and 11,793 kg (10,000 lb. and 26,000 lb.) compared to 209 fatalities on buses with a GVWR greater than 11,793 kg (26,000 lb.). Among buses with a GVWR of greater than 11,793 kg (26,000 lb.), over 70 percent of the fatalities were cross-country intercity bus occupants, "other buses," and "unknown buses."¹⁸ Thus, although these buses are only involved in 12 percent of fatal crashes involving buses, they represent the majority of fatalities from bus crashes.

Furthermore, the size of the rollover crash problem for cross-country intercity buses is greater than in other buses. According to FARS data from 2000 to 2009, there were 114 occupant fatalities as a result of rollover events on cross-country intercity buses, "other buses," and "unknown buses" with a GVWR of greater than 11,793 kg (26,000 lb.), which represents 55 percent of bus fatalities on those bus types.

¹⁷ This data was taken from the FARS database and was presented in the final rule requiring that seat belts be installed on certain buses. See 78 FR 70415, 70423–26 (Nov. 25, 2013).

¹⁸ The FARS database has five bus body type categories: (1) Cross-country/intercity bus, (2) transit bus, (3) school bus, (4) other bus, and (5) unknown bus. Transit bus and school bus body types were excluded from the analysis because they are easily recognized and categorized as such by crash investigators and those coding the FARS data. Thus, those vehicles are unlikely to be miscoded as other buses.

B. Contributing Factors in Rollover and Loss-of-Control Crashes

Many factors related to heavy vehicle operation, as well as factors related to roadway design and road surface properties, can cause heavy vehicles to become yaw unstable or to roll. Listed below are several real-world situations in which stability control systems may prevent or lessen the severity of such crashes.

- Speed too high to negotiate a curve—The entry speed of vehicle is too high to safely negotiate a curve. When the lateral acceleration of a vehicle during a steering maneuver exceeds the vehicle's roll or yaw stability threshold, a rollover or loss of control is initiated. Curves can present both roll and yaw instability issues to these types of vehicles due to varying heights of loads (low versus high, empty versus full) and road surface friction levels (e.g., wet, dry, icy, snowy).

- Road design configuration—Some drivers may misjudge the curvature of ramps and not brake sufficiently to negotiate the curve safely. This includes driving on ramps with decreasing radius curves as well as operating on curves and ramps with improper signage. A vehicle traveling on a curve with a decrease in super-elevation (banking) at the end of a ramp where it merges with the roadway causes an increase in vehicle lateral acceleration, which may increase even more if the driver accelerates the vehicle in preparation to merge.

- Sudden steering maneuvers to avoid a crash—The driver makes an abrupt steering maneuver, such as a single- or double-lane-change maneuver, or attempts to perform an off-road recovery maneuver, generating a lateral acceleration that is sufficiently high to cause roll or yaw instability. Maneuvering a vehicle on off-road, unpaved surfaces such as grass or gravel may require a larger steering input (larger wheel slip angle) to achieve a given vehicle response, and this can lead to a large increase in lateral acceleration once the vehicle returns to the paved surface. This increase in lateral acceleration can cause the vehicle to exceed its roll or yaw stability threshold.

- Loading conditions—A loss of yaw stability due to severe over-steering is more likely to occur when a vehicle is in a lightly loaded condition and has a lower center-of-gravity height than it would have when fully loaded. Heavy vehicle rollovers are much more likely to occur when the vehicle is in a fully loaded condition, which results in a high center of gravity for the vehicle.

Cargo placed off-center in the trailer may result in the vehicle being less stable in one direction than in the other. It is also possible that improperly secured cargo can shift while the vehicle is negotiating a curve, thereby reducing roll or yaw stability. Sloshing can occur in tankers transporting liquid bulk cargoes, which is of particular concern when the tank is partially full because the vehicle may experience significantly reduced roll stability during certain maneuvers.

- Road surface conditions—The road surface condition can also play a role in the loss of control a vehicle experiences. On a dry, high-friction asphalt or concrete surface, a tractor trailer combination vehicle executing a severe turning maneuver is likely to experience a high lateral acceleration, which may lead to roll or yaw instability. However, a similar maneuver performed on a wet or slippery road surface is not as likely to experience the high lateral acceleration because of less available tire traction. Hence, the vehicle is more likely to be yaw unstable than roll unstable.

C. NTSB Safety Recommendations

The National Transportation Safety Board (NTSB) has issued several safety recommendations relevant to ESC systems on heavy and other vehicles. One is H-08-15, which addresses ESC systems and collision warning systems with active braking on commercial vehicles. Recommendations H-11-07 and H-11-08 specifically address stability control systems on commercial motor vehicles and buses with a GVWR above 10,000 pounds. Two other safety recommendations, H-01-06 and H-01-07, relate to adaptive cruise control and collision warning systems on commercial vehicles and are indirectly related to ESC on heavy vehicles because these technologies require the ability to apply brakes without driver input.

- H-08-15: Determine whether equipping commercial vehicles with collision warning systems with active braking¹⁹ and electronic stability control systems will reduce commercial vehicle accidents. If these technologies are determined to be effective in reducing accidents, require their use on commercial vehicles.

- H-11-07: Develop stability control system performance standards for all commercial motor vehicles and buses with a gross vehicle weight rating greater than 10,000 pounds, regardless

of whether the vehicles are equipped with a hydraulic or pneumatic brake system.

- H-11-08: Once the performance standards from Safety Recommendation H-11-07 have been developed, require the installation of stability control systems on all newly manufactured commercial vehicles with a GVWR greater than 10,000 pounds.

D. Motorcoach Safety Plan

In November 2009, the U.S. Department of Transportation Motorcoach Safety Action Plan was issued.²⁰ Among other things, the Motorcoach Safety Action Plan includes an action item for NHTSA to assess the safety benefits for stability control on large buses and develop objective performance standards for these systems.²¹ Consistent with that plan, NHTSA made a decision to pursue a stability control requirement for large buses.

In March 2011, NHTSA issued its latest Vehicle Safety and Fuel Economy Rulemaking and Research Priority Plan (Priority Plan).²² The Priority Plan describes the agency plans for rulemaking and research for calendar years 2011 to 2013. The Priority Plan includes stability control on truck tractors and large buses, and states that the agency plans to develop test procedures for a Federal motor vehicle safety standard on stability control for truck tractors, with the countermeasures of roll stability control and electronic stability control, which are aimed at addressing rollover and loss-of-control crashes.

E. International Regulation

The United Nations (UN) Economic Commission for Europe (ECE) Regulation 13, Uniform Provisions Concerning the Approval of Vehicles of Categories M, N and O with Regard to Braking, has been amended to include Annex 21, *Special Requirements for Vehicles Equipped with a Vehicle Stability Function*. Annex 21's requirements apply to trucks with a GVWR greater than 3,500 kg (7,716 lb.), buses with a seating capacity of 10 or more (including the driver), and trailers with a GVWR greater than 3,500 kg (7,716 lb.). Trucks and buses are required to be equipped with a stability system that includes rollover control and directional control, while trailers are required to have a stability system that includes only rollover control. The directional control function must be

demonstrated in one of eight tests, and the rollover control function must be demonstrated in one of two tests. For compliance purposes, the ECE regulation requires a road test to be performed with the function enabled and disabled, or as an alternative, accepts results from a computer simulation. No test procedure or pass/fail criterion is included in the regulation, but it is left to the discretion of the Type Approval Testing Authority in agreement with the vehicle manufacturer to show that the system is functional. The implementation date of Annex 21 was 2012 for most vehicles, with a phase-in based on the vehicle type.

V. Summary of the May 2012 NPRM

Since 2006, the agency has been involved in testing truck tractors and large buses with stability control systems. To evaluate these systems, NHTSA sponsored studies of crash data in order to examine the potential safety benefits of stability control systems. NHTSA and industry representatives separately evaluated data on dynamic test maneuvers. At the same time, the agency launched a three-phase testing program to improve its understanding of how stability control systems in truck tractors and buses work and to develop dynamic test maneuvers to challenge roll propensity and yaw stability. By combining the studies of the crash data with the testing data, the agency is able to evaluate the potential effectiveness of stability control systems for truck tractors and large buses.

The agency conducted a three-phase testing program for truck tractors and large buses that was described at length in the NPRM and in published reports in order to develop one or more test maneuvers to ensure that ESC systems can reduce vehicle instability. As a result of the agency's testing program and the test data received from industry, the agency was able to develop reliable and repeatable test maneuvers that could demonstrate a stability control system's ability to prevent rollover and loss of directional control among the varied configurations of truck tractors and buses in the fleet.

After considering and evaluating several test maneuvers, the agency proposed using two test maneuvers for performance testing: The slowly increasing steer (SIS) maneuver and the sine with dwell (SWD) maneuver. The SIS maneuver is a characterization maneuver used to determine the amount of steering input required by the SWD maneuver. By determining the relationship between a vehicle's steering wheel angle and the lateral acceleration,

¹⁹ Active braking involves using the vehicle's brakes to maintain a certain, preset distance between vehicles.

²⁰ See *supra*, note 6.

²¹ *Id.* at 28–29.

²² See Docket No. NHTSA-2009-0108-0032.

the SIS maneuver normalizes the severity of the SWD maneuver. The SIS maneuver was also proposed to be used to ensure that the system has the ability to reduce engine torque.

Using a steering wheel angle derived from the SIS maneuver, the agency proposed conducting the sine with dwell maneuver. The SWD test maneuver challenges both roll and yaw stability by subjecting the vehicle to a sinusoidal input. This maneuver would be repeated for two series of test runs (first in the counterclockwise direction and then in the clockwise direction) at several target steering wheel angles from 30 to 130 percent of the angle derived in the SIS maneuver.

We proposed measuring, recording, and processing lateral acceleration, yaw rate, and engine torque data derived from the SIS and SWD maneuvers to determine four performance metrics: Lateral acceleration ratio (LAR), yaw rate ratio (YRR), lateral displacement, and engine torque reduction. The LAR and YRR metrics ensure that the system reduces lateral acceleration and yaw rate, respectively, after an aggressive steering input, thereby preventing rollover and loss of control, respectively. The lateral displacement metric ensures that the stability control system is not set to intervene solely by making the vehicle nonresponsive to driver input. The engine torque reduction metric ensures that the system has the capability to automatically reduce engine torque in response to high lateral acceleration and yaw rate conditions.

The agency also considered several test maneuvers based on its own work and that of industry. In particular, the agency's research included both a J-turn maneuver and a ramp steer maneuver (RSM) for evaluating roll stability. The J-turn maneuver is a path-following maneuver where a vehicle is driven on a test course consisting of a straight lane

followed by a fixed radius curve. The steering wheel angle is determined by the driver making adjustments and corrections to maintain the fixed path. In the RSM maneuver, a vehicle is driven at a constant speed and a steering wheel input that is based on the steering wheel angle derived from the SIS maneuver. The steering wheel angle is then held for a period of time before it is returned to zero. In both the J-turn and RSM maneuvers, a stability control system acts to reduce lateral acceleration, and thereby wheel lift and roll instability, by applying selective braking. A vehicle without a stability control system being tested with these maneuvers would exhibit high levels of lateral acceleration and potentially experience wheel lift or rollover.

The NPRM also set forth the test conditions that the agency would use to ensure safety and demonstrate sufficient performance. All vehicles were proposed to be tested using outriggers for the safety of the test driver. The agency proposed using an automated steering controller for the RSM, SIS, and SWD maneuvers to ensure reproducible and repeatable test execution performance. The agency proposed testing truck tractors with an unbraked control trailer to eliminate the effect of the trailer's brakes on testing. The agency also proposed a test to ensure that system malfunction is detected.

The NPRM proposed that a final rule would take effect for most truck tractors and applicable buses produced two years after publication of a final rule. We stated that two years of lead time would be necessary to ensure sufficient availability of stability control systems from suppliers of these systems and to complete necessary engineering on all vehicles. For three-axle tractors with one drive axle, tractors with four or more axles, and severe service tractors, we proposed allowing two years of additional lead time. We stated this

additional time would be necessary to develop, test, and equip these vehicles with ESC systems. Although the agency has statutory authority to require retrofitting of in-service truck tractors, trailers, and large buses, the agency did not propose to require retrofitting, but sought comment on its feasibility, given the integrated aspects of a stability control system.

VI. Overview of the Comments

This section presents a brief overview of the comments received in response to the NPRM. The comments are addressed in detail in the section related to the subject of the comment. However, those comments that merely advocated the adoption or rejection of the proposal or some aspect thereof without any underlying explanation are not addressed further.

We also conducted a public hearing on July 24, 2012 in Washington, D.C.²³ Summaries of the oral testimony and a transcript of the hearing are both available in the docket.²⁴ Although we have considered the public hearing testimony as if it was a written comment received in the docket, much of the testimony was duplicated in the written comments. We have discussed public hearing testimony below only where that testimony was not reflected in written comments received by the agency.

In addition to the comments received at the public hearing, we received written comments from 43 individuals or entities. The commenters represented wide-ranging interests, including individuals, truck drivers, truck fleet operators, vehicle component manufacturers, truck and bus manufacturers, and safety advocacy organizations. The identity of the 46 commenters, their self-identified interest or affiliation, if given, where the comments can be located in the docket are cited in Table 2.²⁵

TABLE 2—LIST OF COMMENTERS AND LOCATION OF COMMENTS IN THE DOCKET

Commenter	Docket Number
Vehicle Manufacturers:	
Blue Bird Body Company (Blue Bird)	NHTSA-2012-0065-0034
Daimler Trucks North America LLC (Daimler)	NHTSA-2012-0065-0028
EvoBus GmbH	NHTSA-2012-0065-0027
Fire Apparatus Manufacturer's Association	NHTSA-2012-0065-0014
Navistar, Inc.	NHTSA-2012-0065-0039
Schneider National Inc. (Schneider)	NHTSA-2012-0065-0033
Temsa Global (Temsa)	NHTSA-2012-0065-0019
Truck & Engine Manufacturers Association (EMA)	NHTSA-2012-0065-0044
Volvo Group	NHTSA-2012-0065-0031

²³ Notice of the hearing was published in the Federal Register on July 2, 2012. 77 FR 39206.

²⁴ Summaries of the oral testimony provided by the presenters are contained in Docket No. NHTSA-

2012-0065-0049. A transcript of the public hearing is contained in Docket No. NHTSA-2012-0065-0056.

²⁵ Three commenters presented comments only at the public hearing.

TABLE 2—LIST OF COMMENTERS AND LOCATION OF COMMENTS IN THE DOCKET—Continued

Commenter	Docket Number
Component Manufacturers:	
Bendix Commercial Vehicle Systems	NHTSA-2012-0065-0046
	NHTSA-2012-0065-0048
	NHTSA-2012-0065-0055
Heavy Duty Brake Manufacturers Council (HDBMC)	NHTSA-2012-0065-0041
Meritor WABCO	NHTSA-2012-0065-0035
Robert Bosch LLC (Bosch)	NHTSA-2012-0065-0036
Drivers and Fleet Operators:	
American Trucking Associations, Inc. (ATA), including report of the American Transportation Research Institute (ATRI)	NHTSA-2012-0065-0016
	NHTSA-2012-0065-0030
	NHTSA-2012-0065-0057
Associated Logging Contractors—Idaho	NHTSA-2012-0065-0042
John Boyle	NHTSA-2012-0065-0017
Jim Burg, James Burg Trucking Company	NHTSA-2012-0065-0056
	(public hearing)
John H. Hill, The Hill Group	NHTSA-2012-0065-0056
	(public hearing)
Alexander J. MacDonald	NHTSA-2012-0065-0005
National Ready Mixed Concrete Association	NHTSA-2012-0065-0038
National School Transportation Association	NHTSA-2012-0065-0037
Owner-Operator Independent Drivers Association (OOIDA)	NHTSA-2012-0065-0024
Skagit Transportation Inc	NHTSA-2012-0065-0006
Bob Waterman	NHTSA-2012-0065-0052
Safety Organizations:	
AAA Public Affairs (AAA)	NHTSA-2012-0065-0043
Advocates for Highway and Auto Safety (Advocates)	NHTSA-2012-0065-0047
American Highway Users Alliance	NHTSA-2012-0065-0040
Commercial Vehicle Safety Alliance (CVSA)	NHTSA-2012-0065-0050
Consumers Union	NHTSA-2012-0065-0053
Insurance Institute for Highway Safety (IIHS)	NHTSA-2012-0065-0021
Kentucky Injury Prevention and Research Center	NHTSA-2012-0065-0007
National Association for Pupil Transport (NAPT)	NHTSA-2012-0065-0023
National Transportation Safety Board (NTSB)	NHTSA-2012-0065-0015
Road Safe America	NHTSA-2012-0065-0004
Other Organizations and Private Individuals:	
American Association for Justice (AAJ)	NHTSA-2012-0065-0020
American Trauma Society	NHTSA-2012-0065-0009
Justin C. Barriault	NHTSA-2012-0065-0010
Robert M. Chin	NHTSA-2012-0065-0011
Jerry R. Curry	NHTSA-2012-0065-0018
Jerry J. Evans	NHTSA-2012-0065-0003
Fried Rogers Goldberg, LLC	NHTSA-2012-0065-0025
Nadya V. Gerber	NHTSA-2012-0065-0012
The Martec Group, Inc. (Martec)	NHTSA-2012-0065-0051
Mercatus Center at George Mason University (Mercatus)	NHTSA-2012-0065-0022
Josh A. Sullivan	NHTSA-2012-0065-0013
Hon. Betty Sutton	NHTSA-2012-0065-0056
	(public hearing)

VII. Key Differences Between the Final Rule and the NRPM

This section summarizes the significant differences between the NPRM and this final rule. Less significant changes are noted in the appropriate sections of the preamble.

The most significant change between the NPRM and the final rule is that the agency has chosen an alternative performance test maneuver to demonstrate an ESC system’s ability to maintain vehicle stability. After considering public comments and conducting additional track testing, we have adopted a 150-foot J-turn maneuver as the performance test maneuver in this final rule. In the

NPRM, we proposed using a slowly increasing steer (SIS) maneuver as a characterization maneuver and a sine with dwell (SWD) maneuver as a roll and yaw performance maneuver. The 150-foot J-turn test maneuver is discussed in the NPRM and is a variation of an alternative test maneuver proposed in the NPRM.

Because the 150-foot J-turn test maneuver only tests an ESC system’s ability to mitigate roll instability and the agency lacks any alternative test maneuver to test an ESC system’s ability to mitigate yaw instability, this final rule does not include a performance test to evaluate yaw instability. However, this final rule carries forward the

requirement that an ESC system be capable of mitigating yaw instability.

The 150-foot J-turn maneuver also uses a different performance metric than the SWD maneuver. The SWD maneuver’s performance criteria were the change in lateral acceleration and yaw rate through the maneuver. In this final rule, we are using a simpler metric—reduction in forward speed.

The change in performance test maneuver has also led to changes in the test conditions and equipment. Because the test maneuver in this final rule is conducted over a fixed path, rather than fixed steering used for the SWD maneuver, an automated steering wheel controller will not be used for the J-turn maneuver. We have also modified the

loading condition for vehicles to test them at GVWR. We have also reduced the instrumentation requirements in light of the simpler performance metric.

VIII. ESC Requirement

A. Whether to Require Stability Control

In the May 2012 NPRM, the agency proposed to require that all truck tractors and certain buses with a GVWR of more than 11,793 kg (26,000 lb.) to be equipped with ESC. The agency preliminarily found that the proposed standard met the need for motor vehicle safety.²⁶ That finding was based upon the safety problem discussed in the NPRM and summarized in section IV above.²⁷ Moreover, the agency found that requiring ESC systems on truck tractors and certain large buses would be cost-effective.²⁸

We received many comments addressing the general question of whether stability control systems should be required on truck tractors and large buses. Several commenters questioned the need for a stability control mandate on truck tractors and certain large buses and recommended against adopting a final rule requiring any type of stability control system. A consistent theme in many of the comments received from private individuals was also expressed in the comment from Yankee Trucks. These commenters argued that the decision to include ESC should be decided by the vehicle's end user.

Other commenters such as Mercatus and OOIDA were concerned that NHTSA failed to look at alternative methods to improve motor vehicle safety problems caused by rollover and loss-of-control crashes. Mercatus suggested that NHTSA failed to look at driver fatigue detection, road condition sensors, improved safety procedures, or driver training, which might be less costly. OOIDA highlighted driver training, enforcement of traffic laws, driver incentives, improved crashworthiness, and road signage as alternative ways to deal with the rollover problem. Several other commenters highlighted driver training and accountability related to both driving and vehicle loading as alternative methods that could prevent rollover and loss-of-control crashes. The Boyle Brothers, OOIDA, and several individual commenters both noted that stability control systems would not prevent crashes caused by driving too fast for conditions. Both Mercatus and OOIDA believe that alternative measures are less costly than a stability

control mandate at preventing rollover and loss-of-control crashes.

Individual commenters, many of whom identified themselves as truck drivers, also questioned the safety of stability control systems and their ability to prevent crashes. One commenter believes that stability control systems are unsafe based on personal experience because it often engaged the service brakes in curves. Another commenter was concerned that drivers would become too dependent on stability control systems and cause them to drive through curves faster with the system than without.

OOIDA and many individual commenters were concerned about the total cost of the rule and whether the benefits justified the costs. Relatedly, several commenters raised concerns that stability control systems would add complexity to the brake system by requiring additional parts, and thus, higher repair costs. Yankee Trucks also raised concerns that if a stability control system malfunctions, ABS would also not function. OOIDA claimed that a stability control requirement would cause drivers and truck companies to keep existing vehicles in service longer or even go out of business due to the added costs of stability control and other regulatory mandates.

Some commenters also expressed concerns that stability control technologies could have negative effects on safety. For example, individual commenters questioned whether it was safe to have stability control systems braking the vehicle automatically in wet conditions or on curves. Associated Logging Contractors opposed a mandate because it believes that a stability control requirement may cause safety issues on forest roads, which are different from highways.

Commenters from a wide variety of backgrounds supported a stability control mandate. These organizations include organizations such as Road Safe America, the Kentucky Injury Prevention and Research Center, the American Trauma Society, the American Association for Justice, Advocates, the American Highway Users Alliance, AAA, the Commercial Vehicle Safety Alliance, and Consumers Union. Business associations representing brake suppliers (HDBMC), truck manufacturers (EMA), and truck fleet operators (ATA) all supported a stability control mandate. Brake suppliers such as Bosch, Bendix, and Meritor WABCO also supported a stability control mandate. Individual truck and bus manufacturers who commented also such as Daimler, Volvo, and Navistar supported a stability

control mandate. Some motor carriers who commented also supported a stability control mandate. The NTSB and a former Member of Congress, Betty Sutton, both supported a stability control mandate. Many individual commenters also supported a stability control mandate.

Although these commenters come from varied backgrounds, their reasons for supporting a stability control mandate were generally consistent. Commenters supporting a mandate generally cited research from NHTSA, the manufacturing industry, and others regarding the effectiveness of stability control systems, and their ability to prevent rollover and loss-of-control crashes and save lives. IIHS, for example, cited its own research suggesting that having ESC systems on all truck tractors could prevent as many as 295 fatal crashes each year. Some individual commenters also cited personal experience with stability control systems. John Hill observed that the cost of a stability control system on a vehicle is comparable to the cost to the government of a single compliance review of a motor carrier's safety practices. These commenters generally agreed that the benefits of a stability control mandate far exceed its costs.

After considering all public comments, the agency is proceeding with adopting FMVSS No. 136 to require all truck tractors and certain large buses with a GVWR of more than 11,793 kg (26,000 lb.) to have stability control systems. This decision is largely driven by the data before the agency. In developing the proposal, the agency analyzed crash data to identify risks not addressed in existing FMVSSs. These safety risks include rollover and loss-of-control crashes that are caused by many factors including traveling at a speed too high to negotiate a curve, sudden steering maneuvers to avoid a crash, loading conditions, road surface conditions, and road design configuration. The agency's research, described at length in the NPRM, shows that stability control technologies could prevent crashes in these situations.

With respect to the comments suggesting that vehicles braking during a curve or on wet conditions could have adverse safety consequences, we observe that an ESC system is designed to slow the vehicle in a curve in order to reduce the lateral acceleration and allow the operator to maintain roll and yaw control of the vehicle only in situations where instability is imminent. After careful qualitative and quantitative assessment, we have concluded that requiring stability

²⁶ 77 FR 30788.

²⁷ 77 FR 30769–71.

²⁸ 77 FR 30791.

control systems will improve the overall safety of the vehicle.

Regarding other possible improvements to reduce crashes, we do not disagree that many of the suggestions regarding driver training, enforcements, and crashworthiness of trucks and buses could improve motor vehicle safety and (except for the latter) reduce vehicle rollover and loss-of-control crashes. However, driver training and enforcement of traffic safety laws are outside of NHTSA's regulatory authority under the Safety Act. Moreover, the commenters advocating these alternative means to address the safety problem did not provide data to support their conclusions that their alternatives would be less costly or more cost-effective than a stability control mandate. Although the issues related to costs and benefits will be addressed more specifically in section XIV below, the agency has concluded that requiring ESC systems on truck tractors and certain large buses is cost-effective and the most effective means to address the safety problem identified in this rulemaking.

B. Whether to Require ESC or RSC

The agency proposed to require that truck tractors and large buses be equipped with ESC systems rather than RSC systems. An ESC system is capable of all of the functions of an RSC system. In addition, an ESC system has the additional ability to detect yaw instability, provide braking at front wheels, and detect the steering wheel angle. These additions, as demonstrated by NHTSA's testing, allow an ESC system to have better rollover prevention performance than an RSC system in addition to the yaw instability prevention component. This is because the steering wheel angle sensor allows the ESC system to anticipate changes in lateral acceleration based upon driver input and to intervene with engine torque reduction or selective braking sooner, rather than waiting for the lateral acceleration sensors to detect potential instability.

The NPRM stated that mandating ESC systems rather than RSC systems will prevent more crashes, injuries, and fatalities. The additional benefits from ESC systems can be attributed to both the ESC's system's ability to intervene sooner and its ability to prevent yaw instability that would lead to loss-of-control crashes.

The NPRM stated that mandating ESC systems rather than RSC systems will result in higher initial costs to manufacturers. Moreover, while our benefit and cost estimates led to the

preliminary conclusion that mandating RSC systems would be more cost-effective than mandating ESC systems, mandating ESC systems would result in higher net benefits.

Several commenters agreed with NHTSA's proposal to require ESC systems rather than RSC systems. Jerry Curry and Bendix specifically mentioned that ESC systems should be required instead of RSC systems. Mr. Curry and IIHS also commented that RSC systems would not be the best platform to use when considering future technological advances. John Hill similarly observed that ESC systems have the potential to support future collision avoidance and crash mitigation technologies. Mr. Hill also observed that loss-of-control crashes can be difficult to identify and classify. Road Safe America, Mr. MacDonald, and AAA said the agency should require ESC equipment on truck tractors and buses. IIHS and Jim Burg recommended requiring ESC systems over RSC systems because loss-of-control collisions can be reduced using ESC systems. Volvo, while not expressly advocating for an ESC mandate, stated that it had investigated the use of RSC systems, but found they were unable to provide stability control in a wide range of driving conditions and environments that its customers operate.

In its comment, Bendix stated that an ESC system has an effectiveness that is 31% greater than a RSC system. Bendix also commented that ESC systems provide "more information about what the vehicle is doing" because these systems include two additional sensors. Bendix also said that ESC systems provide more effective interventions through selective application of all available vehicle brakes.

Other commenters supported RSC as a minimum requirement rather than ESC. Schneider, for example, asserted that it considered purchasing vehicles with ESC system, but determined that ESC systems would provide a negligible benefit at substantially higher costs when compared to RSC. ATA also asserted that marginal benefit of ESC over RSC is not justified by the added cost based on current information. ATA cited the variability of the truck-tractor industry in four areas: (1) Private trucking vs. for-hire companies; (2) the size of loads; (3) the type of truck and trailer being used (*e.g.*, box, van, refrigerated, liquid and bulk tankers); and by operation (*e.g.*, agricultural, long haul, short haul, over size, overweight, etc.). ATA believes this diversity may warrant choosing ESC or RSC depending on the individual vehicle.

Both Schneider and ATA cited a study by the American Transportation Research Institute (ATRI) that surveyed stability control technology used in the trucking industry. This study collected crash and financial data from the trucking industry, including information regarding whether the vehicle was equipped with an ESC system, an RSC system, or no stability control system at all. The sample included 135,712 trucks, of which 68,647 had RSC systems, 39,529 had ESC systems, and 27,536 had no stability control systems. The study included unit costs of stability systems, average annual miles per tractor, the total number of safety incidents (including rollover crashes), and the average cost of each incident. The crash analysis concluded that industry-wide installation of RSC systems would result in fewer rollover, jackknife, and tow/stuck crashes compared to industry-wide installation of ESC systems.

NHTSA agrees with those commenters recommending ESC systems instead of RSC systems. However, we are not relying on the assertions of Mr. Curry, Mr. Hill and IIHS that ESC systems provide a better platform for future technological advances. We believe the justification for ESC systems is satisfied using benefits estimates for today's ESC systems, without having to consider possible future advances such as forward collision mitigation systems. Similarly, we are not relying on Bendix's assessment of ESC system effectiveness. While Bendix's analysis of the effectiveness of ESC and RSC systems is addressed in more detail in section XIV below, we believe that our own analysis based on an effectiveness study conducted by University of Michigan Transportation Research Institute (UMTRI) and Meritor WABCO is a more accurate assessment of the effectiveness of ESC and RSC systems. Although both NHTSA and Bendix reached the conclusion that ESC systems will be more effective than RSC systems at preventing rollover crashes, we believe that Bendix's method of determining system effectiveness is arbitrarily biased in favor of ESC systems.

Regarding ATA's assertion of the variability of trucks, we agree that truck tractors are varied and that some of those variations affect vehicle stability. However, we believe that variability justifies choosing to require ESC systems rather than RSC systems. In particular, ATA observed that trucks carry various loads, implying that certain kinds of loads may be more suited to ESC systems whereas other

loads may only require RSC systems to achieve equal effectiveness. However, the nature of the trucking industry is such that a truck tractor may end up towing many different types of trailers in its lifetime, including flatbed trailers, box trailers, and tanker trailers. A vehicle manufacturer is unlikely to know at the time of a vehicle's production whether a specific truck tractor is going to be carrying loads that are more likely to cause a rollover or loss-of-control crash because the load has a high center of gravity or has the potential to slosh. The only way to ensure that the vehicles that ATA believes would perform better with ESC systems is to require all truck tractors to be equipped with ESC systems.

The ATRI study will be addressed more specifically in the benefits and costs discussion in section XIV below and in the FRIA accompanying this final rule. However, for the purpose of determining whether to require ESC systems or RSC systems, the ATRI study's suggestion that RSC systems would be more beneficial than ESC systems reflects the specific truck carriers they studied, but does not necessarily constitute a representative sample of the truck fleet. ATRI's conclusion is contrary to NHTSA's own findings that ESC systems are more effective and have greater net benefits than RSC systems. First, as explained above, ESC systems contain all of the functions of RSC systems, plus have additional sensors such as a steering wheel angle sensor, to allow a system to intervene based on a predicted rise in lateral acceleration rather than waiting for the lateral acceleration to rise. Second, ESC systems have the capability to braking all of the vehicle's axles, whereas an RSC system is generally unable to brake the steering axle of the vehicle. Third, although NHTSA's own research found that one RSC system performed as well or slightly better than an ESC system under certain conditions, we attributed the performance difference to that particular RSC system being programmed to brake more aggressively than the ESC system on the same vehicle.²⁹ For these reasons, we conclude that the ATRI study is not representative of the entire trucking industry or the performance of ESC systems compared to RSC systems.

Based on the foregoing, this final rule will require that truck tractors and certain buses be equipped with ESC systems rather than RSC systems. As discussed in section XIV below, RSC systems are less beneficial than ESC systems in reducing rollover crashes

and much less beneficial in addressing loss-of-control crashes. Although RSC systems are slightly more cost beneficial than ESC systems, ESC systems provide substantially higher net benefits because ESC systems will prevent many more crashes.³⁰ NHTSA has concluded that the additional safety benefits of ESC systems in both rollover and loss-of-control crashes justify the additional cost of ESC systems compared to RSC systems.

C. Definition of ESC

The NPRM included definitional criteria in the proposed regulatory text. We reasoned that, relying solely on performance-based tests without mandating any specific equipment may require a battery of tests to cover the complete operating range of the vehicle. Given the wide array of possible configurations and operating ranges for heavy vehicles, the agency did not believe it was practical to develop performance tests that address the full range of possibilities and remain cost-effective. Accordingly, the agency proposed to include definitional criteria in the NPRM, which included equipment that would be required as part of a compliant ESC system.³¹ We note that, when developing the ESC requirement for light vehicles, the agency chose to include such a requirement in FMVSS No. 126.

SAE International has a Recommended Practice on *Brake Systems Definitions-Truck and Bus*, J2627 (Aug. 2009), which includes a definition of Electronic Stability Control and Roll Stability Control. SAE International's definition of an ESC system requires that a system have an electronic control unit that considers wheel speed, yaw rate, lateral acceleration, and steering angle and that the system must intervene and control engine torque and auxiliary brake systems to correct the vehicle's path.

The UN ECE Regulation 13 definition for the electronic stability control system, promulgated in Annex 21, includes the following functional attributes for directional control: Sensing yaw rate, lateral acceleration, wheel speeds, braking input and steering input; and the ability to control engine power output. For vehicles with rollover control, the functions required by the stability control include: Sensing

lateral acceleration and wheel speeds; and the ability to control engine power output.

In developing a definition for ESC, the agency reviewed the functional attributes contained in SAE J2627 and the requirements of Annex 21 of UN ECE Regulation 13, and incorporated parts of both of definitions the NPRM. The proposed definition was similar in wording to the definition from FMVSS No. 126, which specifies certain features that must be present, that ESC be capable of applying all the brakes individually on the vehicle, and that it have a computer using a closed-loop algorithm to limit vehicle oversteer and understeer when appropriate. Unlike the light vehicle standard, which focuses on yaw stability, the NPRM proposed to require a stability control system that also helps to mitigate roll instability conditions.

Furthermore, the proposed definition required that the ESC system must be operational during all phases of driving, including acceleration, coasting, deceleration, and braking, except when the vehicle is below a low-speed threshold where loss of control or rollover is unlikely. According to information the agency obtained from vehicle manufacturers and ESC system suppliers, the low speed threshold for a stability control system is 10 km/h (6.2 mph) for yaw stability control and 20 km/h (12.4 mph) for roll stability control. For the purposes of the NPRM, the agency set a single threshold of 20 km/h (12.4 mph) as the speed below which ESC is not required to be operational.

The benefit of an ESC system is that it will reduce vehicle rollovers and loss of control under a wide variety of vehicle operational and environmental conditions. However, the performance tests in the NPRM would only evaluate ESC system performance under very specific conditions. To ensure that a vehicle is equipped with an ESC system that met the proposed definition, we proposed that vehicle manufacturers make available to the agency documentation that would enable NHTSA to ascertain that the system includes the components and performs the functions of an ESC system.

Meritor WABCO, HDBMC, and Bendix recommended a change to the definition of an ESC system. Where the definition required that the system both augment vehicle directional stability and enhance rollover stability by applying and adjusting brake torques, the commenters recommended that the words "having the capability of" be added to each instance. Bendix also recommended that each instance of

³⁰ Cost-effectiveness is measured in terms of lower cost per equivalent life saved. For more discussion of the costs and benefits of this rule see Section XIV, below, and the Final Regulatory Impact Analysis accompanying this final rule, which has been placed in the docket.

³¹ Similar requirements exist in the light vehicle ESC requirements. See 49 CFR 571.126, S4.

“brake torque” should be changed to “deceleration torque.”

We agree with the commenters’ recommendation to change the requirement that ESC systems augment vehicle directional stability and enhance rollover stability by “applying and adjusting vehicle brake torques” to “having the capability of applying and adjusting vehicle brake torques.” The wording in the NPRM could be construed to require brake torques to be applied simultaneously at each wheel position for correcting yaw moment or reduce lateral acceleration. This was not our intention. Rather, we intended to require that brake torque at each wheel position be capable of being applied and adjusted individually. In analogous portions of the ESC system definition, we use the words “has a means,” which is similar in meaning to “capable.”

However, we are not making Bendix’s suggested change of the term “brake torque” to “deceleration torque.” We are not sure that Bendix’s suggested language would be functionally different than the proposal and cannot see how it adds clarity. We are specifically interested in requiring that systems be capable of controlling the brakes independently at each wheel end on at least one front and at least one rear axle of the vehicle.

Bendix also recommended a change to the requirement that the system enhance vehicle directional stability by applying and adjusting the vehicle brake torques. Bendix requested that NHTSA clarify that the “vehicle” referred to in this requirement is the truck tractor or bus and not the trailer. That is, Bendix wanted to ensure that the trailer is omitted from the vehicle directional stability requirements. Bendix noted that the requirements regarding the system’s ability to control trailer brakes is addressed elsewhere.

We agree with Bendix’s recommendation. It was not our intention to include trailers in the requirement that vehicles be capable of maintaining directional stability. Bendix is correct that there could be some confusion with the proposed requirement because a trailer is also a motor vehicle and consequently, the proposed requirement that vehicles have the capability to maintain directional stability and the roll stability may be misinterpreted to apply to a trailer. Therefore, we have revised the ESC definition to specify that truck tractors and buses must have the means to apply and adjust vehicle brake torques on at least one front and at least one rear axle.

Regarding the definitional criteria for mass estimation, Meritor WABCO,

HDBMC, and Bendix suggested an addition to the requirement that a system have a means to estimate the vehicle (or combination vehicle) mass. The commenters request that NHTSA include language allowing a system to automatically obtain the vehicle’s mass.

NHTSA is not making the suggested change. The suggested change would require a system to have a means to estimate or automatically obtain vehicle mass. We do not believe there is a manner in which to automatically obtain the vehicle’s mass short of weighing it on a scale. Any other calculation of the vehicle’s mass is an estimate. We note that the means for obtaining the vehicle’s mass is not prescribed. The requirement is necessary to ensure that the ESC system is capable of using the vehicle mass data in the closed-loop algorithm of its computer to apply and adjust the vehicle brake torques for enhancing rollover stability and inducing correcting yaw moment. Adding “automatically obtain” to the definition does not improve or clarify the requirement to have a means of estimating vehicle mass.

In summary, NHTSA continues to believe that the definitional criteria, including required equipment and system capabilities, are necessary to ensure that ESC systems perform as they are intended and as they currently perform. These criteria are objective in terms of explaining to manufacturers what type of performance is required and the minimal equipment necessary for that purpose.

D. Technical Documentation

The NPRM proposed requiring that the vehicle manufacturer provide a system diagram that identifies all ESC system hardware; a written explanation, with logic diagrams included, describing the ESC system’s basic operational characteristics; and a discussion of the pertinent inputs to the computer and how its algorithm uses that information to prevent rollover and limit oversteer and understeer. Because the proposed definition for ESC systems on truck tractors included the capability to provide brake pressure to a towed vehicle, the agency proposed requiring that, as part of the system documentation, the manufacturer include the information that shows how the tractor provides brake pressure to a towed trailer under the appropriate conditions.

Volvo questioned the need for manufacturers to submit technical documentation to NHTSA, stating that NHTSA has relied on the manufacturer’s certification that the

system meets the FMVSSs. HDBMC and Bendix requested confirmation that this technical documentation would be considered proprietary information and would not be released to the public. Finally, Bendix was concerned about the acceptance criteria for the evaluation of the submitted technical documentation. Bendix stated that there was no objective acceptance criteria in the proposed standard and recommended that the agency add acceptance criteria.

Upon consideration of the comments, we have decided to remove from the regulatory text references to specific documentation that NHTSA would request from manufacturers. However, NHTSA’s Office of Vehicle of Safety Compliance often requests, as part of its testing to verify compliance with the FMVSSs, certain information from manufacturers. For example, NHTSA may ask how a manufacturer’s system meets the definition of an “ESC System” set forth in this final rule. Information such as the technical documentation that was listed in the regulatory text of the NPRM may be included in or responsive to such a request. Of course, a manufacturer’s inability to demonstrate that its system meets the definition of an “ESC System” could lead to a finding of noncompliance with S5.1 of FMVSS No. 136.

IX. Vehicle Applicability and Phase-In

A. Trucks

1. Summary of the NPRM

Vehicles with a GVWR greater than 10,000 pounds include a large variety of vehicles ranging from medium duty pickup trucks to different types of single-unit trucks, buses, trailers and truck tractors. Vehicles with a GVWR of greater than 10,000 pounds are divided into Classes 3 through 8. Class 7 vehicles are those with a GVWR greater than 11,793 kilograms (26,000 pounds) and up to 14,969 kilograms (33,000 pounds), and Class 8 vehicles are those with a GVWR greater than 14,969 kilograms (33,000 pounds).

About 85 percent of truck tractors sold annually in the U.S. are air-braked three-axle (6×4) tractors with a front axle that has a GAWR of 14,600 pounds or less and with two rear drive axles that have a combined GAWR of 45,000 pounds or less, which we will refer to as “typical 6×4 tractors.” Other truck tractors, including two-axle (4×2) tractors, tractors with four or more axles, and severe service tractors, represent about 15 percent of the truck-tractor market in the U.S.

In the NPRM, the agency proposed that truck tractors with a GVWR greater

than 11,793 kilograms (26,000 pounds) would be required to have ESC systems. The agency did not propose requiring stability control systems on trailers, primarily because trailer-based RSC systems were determined by the agency research to be much less effective than tractor-based RSC or ESC systems in preventing rollover. Trailer-based RSC systems are capable of applying braking only on the trailer's brakes. Tractor-based systems can command more braking authority by using both the tractor and trailer brakes. As a result, trailer-based RSC systems do not appear to provide additional safety benefits when used in combination with tractor-based RSC or ESC systems. In addition, the typical service life of a trailer is 20 to 25 years compared with about 8 to 10 years for a truck tractor. Because new tractors are added to the U.S. fleet at a faster rate than new trailers, the safety benefits from stability control systems would be achieved at a faster rate by requiring stability control systems to be installed on a tractor.

Our proposed rule also excluded certain types of low-volume, highly specialized vehicle types. In these cases, the vehicle's speed capability does not allow it to operate at speeds where roll or yaw instability is likely to occur. These exclusions were drawn from FMVSS No. 121, *Air brake systems*, which exclude any vehicle equipped with an axle that has a gross axle weight rating of 29,000 pounds or more; any truck or bus that has a speed attainable in two miles of not more than 33 mph; and any truck that has a speed attainable in two miles of not more than 45 mph, an unloaded vehicle weight that is not less than 95 percent of its GVWR, and no capacity to carry occupants other than the driver and operating crew.

2. Exclusions From ESC Requirement

The Fire Apparatus Manufacturers' Association (FAMA) was generally supportive of the rule. However, they stated that the rule would not be feasible if it is interpreted to apply to a Tractor Drawn Aerial Apparatus. As FAMA explained, this apparatus is a combination vehicle used for firefighting, which are used in many large urban fire departments. The distinguishing feature of this vehicle is that it has two drivers, one in the truck tractor and one in the trailer. FAMA believes that an ESC algorithm on such a vehicle would be very complex because it would need to consider two steering wheels rather than one. FAMA suggested that NHTSA exclude from a final rule any combination vehicle that

requires more than one operator to steer it.

The agency is not adding the exclusion suggested by FAMA. Although FAMA stated that its vehicles would not be subject to the exclusion of vehicles with an axle having a gross axle weight rating of 29,000 pounds or more, it is not clear that this or other exclusions do not apply. Moreover, absent specific information that more fully explains why an exclusion is necessary and not overly broad, NHTSA cannot agree that an exclusion for all combination vehicles that require more than one operator to steer it is necessary.

Furthermore, the scope of the exclusion suggested by FAMA is not consistent with the scope of the rule. Specifically, this final rule, like the NPRM, applies to truck tractors, not trailers. However, the suggested exclusion would apply to combination vehicles, which include both a truck tractor and a trailer. That is, the presence of a trailer would form the basis for the exclusion. If this exclusion was added to the final rule, then the basis for the exclusion would be dependent on the trailer that is attached to the vehicle. This would be confusing and unnecessarily complicate enforcement.

Finally, FAMA has not articulated why its vehicles cannot be equipped with ESC systems. Because the ESC requirement applies only to the truck tractor, the system would only need to take account of one steering wheel input. There would be no requirement that the vehicle respond to any inputs from the trailer. Moreover, NHTSA would conduct compliance testing of the truck tractor using the control trailer specified in the test procedure, not a trailer with a steering wheel.

Several commenters suggested that the agency reduce the scope of the ESC requirement. EMA requested that NHTSA exclude all severe duty trucks from the scope of a final rule. It reasoned that manufacturers offer multiple configurations of truck tractors with different wheelbases, axle, and suspension combinations. Furthermore, it claimed that manufacturers often build only a few vehicles in each configuration and in some cases of severe duty trucks, may only build a single vehicle in a particular configuration.

The agency is not excluding severe duty trucks as EMA suggests. Currently, manufacturers are able to produce products in small volumes that meet all the requirements of the Federal Motor Vehicle Safety Standards (FMVSS). The addition of the ESC rule will not unduly

burden the manufacturers with regard to their small volume products. EMA's actions related to this rulemaking support this conclusion. For example, EMA provided test data to the agency after performing multiple test maneuvers with severe duty trucks equipped with ESC systems. EMA also included the test results from the severe duty trucks to form its recommended test criteria for an alternate roll stability test.

Meritor WABCO requested NHTSA to add the words "pneumatically braked" to the definitions of truck tractors and buses in the ESC rule. Similarly, EMA recommended that NHTSA include the ESC requirements within FMVSS No. 121 rather than in a separate standard.

We are not expressly limiting the scope of the final rule to air braked vehicles. Although Class 8 vehicles typically use pneumatic or air brakes, Class 7 vehicles vary between either air or hydraulic brakes. The scope of the NPRM includes all truck tractors and Class 7 and 8 buses, which showed the greatest rollover problem of all the buses according to our research. In order to address the safety problem with these classes of buses, the ESC rule must include both air and hydraulic brakes. Limiting the scope of this rulemaking to air braked vehicles could provide an incentive for some manufacturers to equip vehicles with hydraulic brakes rather than air brakes to circumvent an ESC system requirement.

3. Single-Unit Trucks

The agency did not propose to include single-unit trucks with a GVWR over 4,536 kg (10,000 pounds). Several commenters recommended expanding the scope of the rule to include straight trucks. Skagit, NTSB, IIHS, and NAPT all suggested that ESC should be mandated on all commercial vehicles greater than 10,000 pounds GVWR, including straight trucks. Advocates recommended that NHTSA should consider the FMCSA study stating the number of fatalities by single-unit trucks, based on data from 2008, are 1,147 each year. Bosch stated that the rule should be expanded to cover all vehicles over 10,000 pounds GVWR vehicles, including hydraulic-braked vehicles, because this segment accounts for a large number of commercial and load bearing vehicles on the U.S. roads. Bosch claims that a mandate with a phase-in period is needed to facilitate industry development of ESC systems on these vehicles. On the other hand, Bendix recommended that "[t]he decision by the agency regarding if and when to consider rulemaking on single-unit trucks should be based on the same

level of research undertaken for tractor and coach.”

We are not expanding the scope of this rulemaking to include single-unit trucks. We believe that a level of research closer to what we had to support the NPRM for truck tractors and large buses is necessary before NHTSA would propose to mandate ESC on all single-unit trucks. After publishing the NPRM, we began a research and testing program to study the safety benefits and performance criteria of ESC systems on single-unit trucks. The research is not yet complete. Furthermore, as we stated in the NPRM, the complexity of the single-unit truck population and the limited crash data available present a significant challenge to determining the effectiveness of stability control on these vehicles. At this time, we will not include single-unit trucks in the ESC rule. However, we believe including buses with hydraulic brakes in this final rule will spur development of ESC systems for other hydraulic-braked vehicles, including trucks with a GVWR of greater than 4,536 kilograms (10,000 pounds) but not more than 11,793 kilograms (26,000 pounds).

4. Compliance Dates

The agency proposed that all new typical 6×4 truck tractors would be required to meet the proposed standard beginning two years after a final rule is published. Because there are currently only two suppliers of truck tractor and large bus stability control systems, Bendix and Meritor WABCO, we reasoned that the industry would require lead time to ensure that the necessary production stability control systems are available to manufacturers. NHTSA also proposed a two-year lead time for two-axle tractors.

For severe service tractors and tractors with four axles or more, which represent about 5 percent of annual truck tractor sales, the agency believed additional lead time was necessary to develop, test, and equip these vehicles with a stability control system. Therefore, we proposed to require that severe service tractors and other atypical tractors be equipped with ESC systems beginning four years after the final rule is published.

Four commenters addressed the compliance dates for trucks proposed by the NPRM. Daimler requested an additional lead time for ESC implementation because it said that it only has RSC systems developed on some models and needs more time to design and validate ESC on all of its models.

In its comment, EMA mentioned that this ESC rule should align with the

implementation dates of the new FMVSS No. 121 stopping distance requirements to give manufacturers the opportunity to refine the braking systems prior to the implementation of this ESC rule. EMA said it is impractical for manufacturers to certify compliance tests using the tests in the NPRM for all typical 6×4 tractors within 2 years of the final rule. Moreover, EMA said that tractors with four or more axles and severe service tractors have not been evaluated using the tests in the NPRM and likely would need additional lead time. However, EMA did not specify how much additional lead time was necessary. Finally, EMA and Bendix recommended including two-axle tractors in the longer lead time period because it appears to be an error.

In contrast, HDBMC stated its belief that the suppliers of ESC systems are prepared to meet the anticipated deployment demands by the implementation dates proposed.

We recognize the recent changes to the stopping distance requirements in FMVSS No. 121 affected truck tractors. Truck tractors, other than three-axle truck tractors, were recently subjected to the reduced stopping distance changes that went into effect on August 1, 2013. Manufacturers of these truck tractors were given two additional years beyond the timeframe for three-axle truck tractors to comply with the amendments to FMVSS No. 121. We agree with Daimler and EMA that at least four years of lead time is warranted for all truck tractors other than typical 6×4 tractors (three-axle truck tractors with a front axle that has a GAWR of 6,622 kg (14,600 pounds) or less and with two rear drive axles that have a combined GAWR of 20,412 kg (45,000 pounds) or less). Although HDMA said that its member companies are ready to supply brake components by the implementation dates proposed, we realize that truck tractor manufacturers need extra time to integrate the ESC systems into their products and to perform the necessary testing to ensure compliance. In addition, manufacturers recently made brake system changes to these models of truck tractors in order to comply with the new requirements in the FMVSS No. 121 amendments. We recognize that ESC systems must be integrated into the brake systems, and we expect that manufacturers may need to modify the brake systems for a second time.

B. Buses

1. Summary of the NPRM

The NPRM proposed that certain buses would be required to be equipped

with ESC systems. The applicability of the proposal to buses mirrored the applicability of the agency’s proposal that certain large buses be equipped with seat belts.³² The proposal for seat belts was applicable to buses with a gross vehicle weight rating (GVWR) of 11,793 kilograms (26,000 pounds) or greater, 16 or more designated seating positions (including the driver), and at least 2 rows of passenger seats that are rearward of the driver’s seating position and are forward-facing or can convert to forward-facing without the use of tools.’’ That proposal excluded school buses and urban transit buses sold for operation in urban transportation along a fixed route with frequent stops. The agency proposed a very similar applicability in the NPRM for this rulemaking.³³ We believed that the proposal encompassed the category of “cross-country intercity buses” represented in the FARS and FMCSA data (identified in section II.A above) that had a higher involvement of crashes that ESC systems are capable of preventing.

2. Buses Built on Truck Chassis

(a) Summary of NPRM

The agency tested three air-braked buses, all of which had a GVWR over 14,969 kg (33,000 lb.) (Class 8). Nevertheless, the agency included Class 7 buses (buses with a GVWR of more than 11,793 kg (26,000 lb.) but not greater than 14,969 kg (33,000 lb.)). We reasoned that, although many Class 7 buses are built on chassis similar to those of single-unit trucks for which ESC has not been widely developed, and we are not aware of any Class 7 bus that is equipped or currently available with ESC. Class 7 buses represent less than 20 percent of the market. Although the agency was not aware of any Class 7 bus currently available with ESC, we were aware that stability control systems are available on a limited number of Class 8 single-unit trucks, such as concrete trucks, refuse trucks, and other air-braked trucks, and that the same technology could be developed for use on Class 7 buses, which we believed were also air-braked vehicles. We also believed that the manufacturers of Class 7 buses would need additional lead time to have the ESC systems developed, tested and installed on their vehicles. Hence, for large buses, the agency proposed an effective date of two years after the final rule is published,

³² 75 FR 50958 (Aug. 18, 2010).

³³ The primary difference is that the ESC proposal was not made applicable to buses with a GVWR of exactly 11,793 kilograms (26,000 pounds) in order to exclude Class 6 vehicles from the proposal.

primarily to accommodate manufacturers of Class 7 buses.

However, we sought comment on the feasibility of including Class 7 buses that are built on chassis similar to those of single-unit trucks within two years. We noted that, although we believed that Class 7 buses were primarily air braked and that ESC systems were readily available for air-braked buses, system availability for any hydraulic-braked buses that may be covered may be more limited. We requested that, if hydraulic-braked buses were covered by the proposal, commenters address manners in which hydraulic-braked buses may be differentiated for exclusion or a different phase-in period.

(b) Summary of Comments

Several commenters raised issues related to the NPRM's definition for large buses. EMA and Navistar commented that the "large bus" definition should not include commercial buses, which are buses greater than 11,793 kg (26,000 lb.), but are not traditional intercity buses. They claimed that many of these buses are built on truck chassis and are different than the Class 8 buses tested by NHTSA. They stated that these buses are built in multiple stages by multiple manufacturers, which would make compliance certification difficult.

According to Navistar, NHTSA did not "reach out" to Navistar regarding its commercial buses because it claimed NHTSA was not aware of its Class 8 commercial buses from the sole fact that they were not specifically mentioned in list of bus manufacturers included in the NPRM.

In its comments, EMA opined that non-motorcoach buses with a GVWR over 11,793 kg (26,000 lb.) are more closely related to single-unit trucks. It also commented that some of the same issues related to requiring ESC systems on single-unit trucks are also present for large buses.

EMA stated that consistent with the Motorcoach Enhanced Safety Act (part of MAP-21), it considered the term "motorcoach" to have the same meaning as "over-the-road-bus," which "means a bus characterized by an elevated passenger deck located over a baggage compartment."³⁴ EMA and Daimler also commented that a "motorcoach" has some, if not all, of the following attributes: a GVWR greater than 33,000 pounds (Class 8); air disc brakes; passenger deck floor more than 45 inches above the ground; rear engine

configuration; monocoque³⁵ construction; 40 or more passenger seats; no provisions for standee passengers; and one passenger entrance and exit door. EMA asserted that NHTSA did not study ESC on other non-motorcoach buses, and therefore, the rule should not apply to those buses.

(c) NHTSA's Response to Comments

NHTSA is not changing the general applicability of the ESC requirement to buses. As we stated in the NPRM, we intended the applicability of the ESC requirement to buses to be similar to the applicability of the agency's requirement that buses have seat belts at each passenger seating position. In both rulemakings, the target vehicles were high occupancy buses associated with a known fatality and injury risk. The buses typically carried a large number of passengers and were operated at highway speeds. We examined the involvement of high occupancy buses in fatal crashes over a 10-year period (FARS data files, for the NPRM, 1999–2008). In this examination of high occupancy bus data, we inspected crash data for buses with a GVWR greater than 4,536 kg (10,000 lb.). We analyzed the construction type and various attributes of the vehicles. The 2000–2009 FARS data show that for buses over 4,536 kg (10,000 lb.), there were 49 passenger fatalities in buses with a GVWR less than 11,793 kg (26,000 lb.), but there were 209 in buses with a GVWR greater than 11,793 kg (26,000 lb.).

Moreover, MAP-21, which was enacted after publication of the NPRM, requires the Secretary to consider requiring ESC systems on certain large buses if the Secretary determines that such a requirement is consistent with the requirements of the Motor Vehicle Safety Act. We believe that mandating ESC systems on the buses covered by the NPRM, subject to some minor changes discussed below, is consistent with those requirements. That is, this standard is practicable, meets the need for motor vehicle safety, and may be stated in objective terms. We believe that ESC systems are currently available for most buses covered by this final rule and can be developed for the others. Moreover, the safety problem discussed in Section IV.D above highlights the rollover problem in buses with a GVWR greater than 11,793 kg (26,000 lb.).

NHTSA has decided to adopt the proposal to require all buses with a GVWR over 11,793 kg (26,000 lb.), subject to some modified exclusions for

school buses, transit buses, and perimeter seating buses. In Section V.B.1 of the NPRM, NHTSA mentioned the rationale for not including a requirement for ESC on single-unit trucks with a GVWR over 4,536 kilograms (10,000 pounds) at this time.³⁶ The rationale was primarily based on the differences between truck tractors and single-unit trucks; it was not intended and did not mention the differences between buses built on truck chassis and buses built with monocoque construction. Although the NPRM stated that single-unit trucks as a whole are more complex and diverse than truck tractors, this does not necessarily apply to buses built on truck chassis. Among the different bodies that could be assembled on a truck chassis, a bus body presents a degree of complexity and diversity that is substantially less than the other truck bodies. For example, a bus body presents a scenario where center-of-gravity height and cargo type are more easily calculated because the bus is limited to transporting people and their luggage rather than varied cargo. The chassis supplier for a bus would be more likely to have knowledge of critical vehicle design parameters that affect ESC calibration.

NHTSA reviewed various definitions used in motorcoach safety legislation including the "over-the-road bus" definition in TEA-21 that was referenced in MAP-21. Similar to the final rule requiring seat belts on certain buses, we are not limiting the applicability of the ESC requirement to TEA-21's definition of over-the-road buses.³⁷ We believe that the definitions referring to over-the-road buses or over-the-road bus service are too narrow, because a number of intercity transport buses involved in fatal crashes were body-on-chassis buses that lacked an elevated passenger deck over a baggage compartment. Further, definitions based on the intended use of the vehicle could pose difficulties for manufacturers and dealers, because the intended use of a vehicle might not be known at the time of vehicle manufacture or sale. We want to make sure as reasonably possible that the buses we most wanted to affect (high-capacity buses associated with known fatality and injury risks) would meet the "motorcoach" safety standards, without having to depend on the state of knowledge of persons in the manufacturing and distribution chain about the prospective use of the bus.

Currently, there is no common Departmental or industry definition of "motorcoach." FMCSA does not have a

³⁴ The rulemaking requirements of the Motorcoach Enhanced Safety Act are addressed in section II above.

³⁵ Monocoque means a type of vehicular construction in which the body is combined with the chassis as a single unit.

³⁶ 77 FR 30789.

³⁷ 78 FR 70429.

definition for motorcoach in its regulations, but it considers a “motorcoach” to be an over-the-road bus. As noted above, over-the-road buses are a subset of the buses NHTSA believes should be regulated as “motorcoaches,” encompassing a part of but not enough of the heavy bus safety problem we seek to address.

We reviewed the underlying chassis structure of high-occupancy vehicles involved in fatal crashes. Some had a monocoque structure with a luggage compartment under the elevated passenger deck (“over-the-road buses”). However, an elevated passenger deck over a baggage compartment was not an element common to the buses involved in fatal intercity transport. In FARS data for buses with a GVWR greater than 11,793 kg (26,000 lb.), 36 percent of the fatalities were in the other bus and unknown bus categories, *i.e.*, not in the over-the-road bus category. Some buses were built using body-on-chassis configurations.

We believe that body-on-chassis configurations are newer entrants into the motorcoach services market. They appear to be increasing in number. A cursory review of the types of buses being used in the Washington, DC area for motorcoach services showed that traditional motorcoaches are generally used for fixed-route services between major metropolitan areas. However, for charter, tour, and commuter transportation from outlying areas, many bus types are used. Some are of monocoque structure, while others are of body-on-chassis structure.

The agency tested Class 8 buses, those with a GVWR greater than 14,969 kg (33,000 lb.), because these buses have larger dimensions and masses than Class 7 buses, and it places them on the most severe end of the spectrum. The performance criteria were created based on the testing of the larger Class 8 buses, and the agency has made a reasoned determination that the criteria are applicable for Class 7 buses, as well. If a Class 8 bus with a larger GVWR can pass the minimum performance criteria for ESC systems, a Class 7 bus with a smaller GVWR can reasonably be required to meet the same criteria.

Despite the fact that some of these buses are built in multiple stages by multiple manufacturers, the agency does not agree that compliance with the ESC standard will be very difficult. Presently, manufacturers building buses in various stages must provide an incomplete vehicle document (49 CFR part 568) to subsequent manufacturers listing each standard that applies. One example of a standard that must be documented is FMVSS No. 121, Air

Brake Systems. A number of factors such as GVWR, GAWR, and any other specific conditions given by the manufacturer must be considered when determining if a bus will be compliant with the braking requirements after it is built. Likewise, the agency expects manufacturers to give similar conditions of final manufacture under which the manufacturer specifies that the completed vehicle will conform to the ESC standard. The agency considers that burden of bus manufacturers to comply with the ESC rule will not be more difficult than the current burden of complying with the air brake requirements in FMVSS No. 121.

3. Hydraulic-Braked Buses

In the NPRM, we requested comment on manners in which hydraulic-braked buses may be differentiated, such as by exclusion or a different phase-in period for the ESC rule. Six commenters provided statements about hydraulic-braked buses and how they should be excluded. Specifically, Blue Bird opposes an ESC mandate on hydraulic-braked buses with a GVWR of 36,200 pounds and less. It also commented that the agency should wait until ESC systems are developed and fully evaluated for hydraulic-braked medium or heavy buses and not include hydraulic-braked buses as part of the ESC rule at this time. Blue Bird, Daimler, Meritor WABCO, Navistar, and EMA all commented that they are not aware of any ESC systems available for hydraulic-braked buses covered by the NPRM. Meritor WABCO recommended that NHTSA exclude vehicles that are not “pneumatically braked.” Finally, both Daimler and EMA stated that they want the ESC regulation to extend only to motorcoaches over 33,000 pounds.

NHTSA has no convincing evidence to exclude hydraulic-braked buses from this ESC rule. The NPRM proposed to require ESC on both Class 7 and Class 8 buses. The mandate in the Motorcoach Enhanced Safety Act makes no differentiation between Class 7 and Class 8 buses. In order to address the rollover and loss-of-control safety problems with these classes of buses, the ESC rule must include both air and hydraulic brakes.

Based on feedback received from the commenters, we recognize that Class 7 buses are composed of both air- and hydraulic-braked vehicles. We recognize that manufacturers who produce large buses equipped with hydraulic-powered brakes might need extra time to ensure the proper integration between the ESC system and the vehicle’s chassis, engine, and braking system. Rather than exclude hydraulic-braked buses from the rule

entirely, NHTSA will extend the compliance date for buses that may be equipped with hydraulic brakes. NHTSA acknowledges that ESC systems are still in development for large buses with hydraulic-braked buses, and therefore, manufacturers and suppliers need additional time to implement this new technology. However, whether the bus is equipped with air brakes or hydraulic brakes, we expect the performance requirements to apply because they are based on the stability of the bus as defined by its attributes such as geometry, mass, inertia, and center-of-gravity height. There is a negligible change in these attributes between an air-braked and a hydraulic-braked bus.

4. School Buses

Six commenters recommended that NHTSA include a requirement that school buses be equipped with ESC systems in the final rule. Consumers Union commented that ESC technology should be required for school buses in order to set a precedent for future crash avoidance technologies. Martec recommended that ESC be required on all buses because it claims that “large school buses satisfy multiple criteria described by NHTSA in its 2011–2013 Rulemaking and Research Priority Plan: the addition of ESC/RSC to school buses would offer large safety benefits, would apply to high-occupancy vehicles, and would apply to a vulnerable population—children.” Skagit, NTSB, and IHS all want ESC to be mandated on all buses greater than 10,000 lb., including school buses.

Conversely, Daimler and NSTA both agreed that NHTSA not include school buses in a final rule mandating ESC systems on large buses. NSTA asserted that, if school buses were subject to an ESC mandate, the costs to purchase school buses would increase. NSTA is concerned that the added costs would reduce the number of school buses on the road, and, consequently, reduce the number of children riding buses to school. NHTSA claims that students riding school buses are eight times safer than riding in the family vehicle because school buses travel at lower speeds and largely in residential areas.

As in the NPRM, we are excluding school buses from the ESC requirement. Each NHTSA rulemaking must address a present safety need and be justified by present safety benefits. We cannot accept Consumers Union’s recommendation to do rulemaking now based on speculative benefits of ESC systems on school buses. According to FARS data between 2000 and 2009, among the large buses, more than 70%

of fatalities on large buses with a GVWR greater than 11,793 kg (26,000 lb.) were related to cross-country intercity bus crashes. Similarly, we stated in the NPRM that FMCSA's Large Truck and Bus Crash Facts 2008 indicates that most of the school bus crashes are not rollover or loss-of-control crashes that ESC systems are capable of preventing. For these reasons, we will not require school buses to be equipped with ESC at this time.

Navistar, EMA, and Daimler requested that the school bus exclusion extend into its line of school bus derivatives. Navistar and EMA reasoned that some commercial buses are built on truck chassis. Because of their similarities to school buses, they reasoned that those buses should be exempted from the ESC rule. According to Daimler, school bus derivatives are vehicles built with hydraulic brakes, and no ESC system is available on these types of hydraulic brakes in the market today.

We disagree with Daimler, EMA, and Navistar that the school bus exception should extend to other buses that are similar or "derivatives" as Daimler stated. If the commenters' reasoning was adopted, any manufacturer could offer a school bus version of a particular bus model and claim that the school bus exception should apply because of the artificially created similarities. This would create an unintended loophole for the ESC requirement and potentially undermine the rule.

5. Transit Buses

The NPRM proposed to exclude from the ESC system requirements urban transit buses sold for operation in urban transportation along a fixed route with frequent stops. EMA and Volvo suggested that we exclude certain buses based on the intended use of the vehicle in public transit. Volvo requested that the agency base the exclusion on the Federal Transit Administration's (FTA) bus procurement guidelines. Volvo suggested excluding "urban transit buses which may be used on suburban express service and general service on urban arterial streets along a fixed route with frequent stops." Similarly, EMA suggested adding to the exclusion for transit buses "urban transit buses used in suburban express service." Conversely, Volvo stated during the public hearing that it was practical and technologically feasible to equip its urban buses with ESC, but it did not want to do so because it did not perceive a safety need.

The Motorcoach Enhanced Safety Act excludes from its mandate to consider requiring ESC systems on large buses a bus used in public transportation

provided by, or on behalf of, a public transportation agency. However, as we explained in the previous section regarding school buses, an exclusion based on the intended use of the vehicle could pose difficulties for manufacturers and dealers, because the intended use of a vehicle might not be known at the time of vehicle manufacture or sale. Consequently, we will not adopt the recommendation suggested by EMA and Volvo to exclude urban transit buses used in suburban express service.

The final rule requiring seat belts at all passenger seating position on certain buses noted that commenters on that NPRM were troubled that the proposed transit bus exclusion was not sufficiently clear. To make the definition more clear, the final rule made clarifications that we believe are also warranted in this final rule requiring ESC systems on certain buses.³⁸ First, we made the regulatory text clearer in describing a "transit bus" by referring to a structural feature (a stop-request system) that buses must have to be a "transit bus." A "stop-request system" means a vehicle-integrated system for passenger use to signal to a vehicle operator that a stop is requested. Second, we expanded the description of a transit bus by recognizing that a transit bus could be sold for public transportation provided not only by, but also on behalf of, a State or local government, for example, by a contractor.

Finally, we made clear that over-the-road buses, as defined by TEA-21, do not qualify as "transit buses," even if the over-the-road bus has a stop-request system or is sold for public transportation provided by or on behalf of a State or local government. This final clarification ensures both that a manufacturer cannot integrate a simple stop-request system on any bus and make it subject to the transit bus exclusion. We recognize that any over-the-road bus used for public transportation provided by or on behalf of a State or local government is likely to be used as a commuter express bus that would carry large numbers of passengers over long distances at highway speeds. However, this use case is similar to the use of over-the-road buses by private companies in intercity service.

6. Minimum Seating Capacity and Seating Configuration

The NPRM also excluded buses that had fewer than 16 designated seating positions (DSPs), including the driver.

³⁸ 78 FR 70438.

This reference was included in the seat belt NPRM based on FMCSA's definition of a "commercial motor vehicle," for purposes of FMCSA's commercial driver's license requirements.³⁹ In the final rule, however, NHTSA noted that FMCSA's regulations state that buses with a GVWR greater than 11,793 kg (26,000 lb.) are commercial vehicles under the commercial driver's license regulations, regardless of the number of DSPs. Accordingly, that exclusion was removed from the final rule.⁴⁰

EMA and Daimler suggested that the rule exclude all buses with fewer than 40 passenger seats, which they imply would exclude buses that are not considered "motorcoaches." However, neither EMA nor Daimler included any explanation for why 40 passenger seats is an appropriate cutoff for an ESC system requirement, and we can perceive none. We do not believe that a minimum number of passenger seats would serve to include or exclude buses that are being driven at long distances or at highway speeds.

The NPRM also proposed to exclude buses with fewer than two rows of passenger seats that are rearward of the driver's seating position and are forward-facing or can convert to forward-facing without the use of tools. This reference was included in the large bus seat belt NPRM to distinguish buses with perimeter seating such as those used to transport passengers in airports between the terminal and locations such as a rental car facility or long term parking.⁴¹ These buses typically have a single forward-facing row of seats in the back of the vehicle and seats along one or both sides of the bus. These buses typically carry people for a relatively short period, often transport standees, generally accommodate baggage and other items, and are designed for rapid boarding and alighting. These buses were excluded because we believed they would be used for relatively short distances on set routes, which are not widely exposed to general traffic.

In the seat belt final rule, the agency simplified the exclusion by defining these vehicles as perimeter seating buses and excluding them from the seat belt requirement rather than specifying the number of rows and seats that a bus has. Second, we referred to the maximum number of forward-facing DSPs that the vehicle may have rather than the number of "rows" it may have. We made this change because there is no definition of "row" generally

³⁹ 75 FR 50969.

⁴⁰ 78 FR 70433.

⁴¹ 78 FR 70434.

applicable to the FMVSSs and it was difficult to define “row” for the purpose of excluding perimeter-seating buses using plain language. Thus, we defined a “perimeter-seating bus” as a bus with 7 or fewer DSPs rearward of the driver’s seating position that are forward-facing or can convert to forward-facing without the use of tools, and excluded perimeter-seating buses from the seat belt requirement.⁴²

We believe that this exclusion is similarly applicable to the ESC system requirement, and we are adopting in this final rule the simplified language used in the seat belt final rule. A perimeter-seating bus typically carries people for short distances on set routes and is often less exposed to general traffic than transit buses. However, consistent with the Motorcoach Enhanced Safety Act, we are not excluding from the ESC system requirement perimeter-seating buses that are also over-the-road buses. Some of these buses may include vehicles often referred to as “limo buses” or “party buses.” These vehicles may also be used as touring or entertainment buses with eating and sleeping accommodations that are used by celebrities and entertainers on tour. We expect that these types of buses will be used for intercity travel and driven at highway speeds.

7. Compliance Dates

The NPRM proposed that buses meet the ESC system requirements two years after publication of a final rule implementing the proposal. Although we did not receive any comments specifically addressing the compliance date for large buses, the Motorcoach Enhanced Safety Act specifically states that a stability enhancing requirement shall apply to all motorcoaches manufactured more than 3 years after the date on which the regulation is published as a final rule. Based on the Congressional determination that any enhancing stability technology rulemaking shall apply to all over-the-road buses manufactured more than 3 years after the final rule is published, we will allow bus manufacturers that amount of time inasmuch as a three-year lead time is practical.

With respect to Class 7 buses, the agency has determined that a three-year compliance date is not practical. The scope of this final rule includes buses that are hydraulic-braked. We recognize the manufacturers of hydraulic-braked buses will likely require extra time to ensure system availability and that the ESC system is properly integrated with

the vehicle. Based on the comments received from the bus industry, Class 7 buses are equipped with both air and hydraulic brakes. Rather than differentiate between brake systems of the Class 7 buses, we believe it would be better to base the compliance date requirements on GVWR. This will also address the concerns of manufacturers of buses built on truck chassis, for which ESC systems may not currently be equipped. We believe that at least four years of lead time are necessary to ensure that suppliers have ESC systems available for hydraulic-braked large buses. Accordingly, this final rule allows Class 7 bus manufacturers four years of lead time before the requirements of this final rule become applicable.

8. Class 3 Through 6 Buses

Some of the commenters recommended that we expand the scope to include mid-size buses which are typically built on single-unit truck frames. Skagit, NTSB, IIHS, NAPT, Advocates, and Bosch all suggested that ESC should be mandated on all buses greater than 10,000 pounds. The NTSB estimated that 11,600 mid-size buses (buses with a GVWR between 10,000 pounds and 26,000 pounds) are produced each year. Advocates recommended that NHTSA should consider the NTSB recommendation that all buses over 10,000 pounds GVWR should be equipped with stability control systems. Bosch stated that the agency should develop a performance standard to cover vehicles in Classes 3 through 7 with hydraulic brakes because this segment accounts for a large number of commercial and load bearing vehicles on the U.S. roads. Bosch claims that a standard with a phase-in period is needed to facilitate industry development of ESC systems for these vehicles. Bosch also cites Annex 21 of UN ECE Regulation 13, which requires ESC on buses operating in the European Union.

We are not expanding the scope of this rule to include vehicles with a GVWR of 11,793 kilograms (26,000 pounds) or less. After publishing the NPRM, we began a research program to study the safety benefits and performance criteria of ESC systems on single-unit trucks, which includes mid-size buses. The research is not yet complete on single-unit trucks or smaller buses. However, we believe including buses with hydraulic brakes in this final rule will spur development of ESC systems for other hydraulic-braked vehicles, including buses with a GVWR of greater than 4,536 kilograms

(10,000 pounds) but not more than 11,793 kilograms (26,000 pounds).

C. Retrofitting

NHTSA considered proposing to require retrofitting of in-service truck tractors, trailers, and large buses with stability control systems. The Secretary has the statutory authority to promulgate safety standards for “commercial motor vehicles and equipment subsequent to initial manufacture.”⁴³ The Secretary has delegated authority to NHTSA to promulgate safety standards for commercial motor vehicles and equipment subsequent to initial manufacture when the standards are based upon and similar to an FMVSS promulgated, either simultaneously or previously, under chapter 301 of title 49, U.S.C.⁴⁴ Additionally, the Federal Motor Carrier Safety Administration (FMCSA) is authorized to promulgate and enforce vehicle safety regulations, including those aimed at maintaining commercial motor vehicles so they continue to comply with the safety standards applicable to commercial motor vehicles at the time they were manufactured.

Although the NPRM did not propose requiring truck tractors, trailers, or large buses to be equipped with stability control systems “subsequent to initial manufacture,” we requested public comment on several issues related to retrofitting in-service truck tractors, trailers, and buses:

- The extent to which a proposal to retrofit in-service vehicles with stability control systems would be complex and costly because of the integration between a stability control system and the vehicle’s chassis, engine, and braking systems.
- The changes necessary to an originally manufactured vehicle’s systems that interface with a stability control system, such as plumbing for new air brake valves and lines and a new electronic control unit for a revised antilock brake system.
- The additional requirements that would have to be established to ensure that stability control components are at an acceptable level of performance for a compliance test, given the uniqueness of the maintenance condition for vehicles in service, particularly for items such as tires and brake components that are important for ESC performance.
- The original manufacture date of vehicles that should be subject to any retrofitting requirements.

⁴³ See Motor Carrier Safety Improvement Act of 1999, section 101(f), Pub. L. 106–159 (Dec. 9, 1999).

⁴⁴ See 49 CFR 1.50(n).

⁴² See 78 FR 70434–35.

- Whether the performance requirements for retrofitted vehicles should be less stringent or equally stringent as for new vehicles, and, if less stringent, the appropriate level of stringency.

- The cost of retrofitting a stability control system on a vehicle, which we believe would exceed the cost of including stability control on a new vehicle.

Several commenters addressed issues related to retrofitting in-service vehicles with ESC systems. We received comments both favoring and opposing retrofitting.

Road Safe America, NTSB, and Advocates supported a requirement for ESC to be retrofitted to existing heavy vehicles. Road Safe America recommended that RSC systems be retrofitted on all existing truck trailers. NTSB cited its recommendation that RSC systems be retrofitted on in-use cargo tank trailers. In its comments, Advocates said that there should be a retrofit requirement to install ESC systems on all in-service vehicles. Advocates stated that the failure to require retrofitting could significantly delay fleet penetration of ESC systems because of the extended service life of the affected vehicles.

Many more commenters were opposed to a retrofit requirement for ESC systems. IIHS stated that ESC systems should not be required to be retrofitted at this time, but that the agency should explore the feasibility creating a requirement in the future. American Highway Users requested that there should be no retrofit requirements for existing vehicles in order to incorporate ESC systems and would oppose any efforts to implement a retrofit requirement. In its comment, ATA did not support a retrofit requirement for ESC systems because it claims there is an average of a 4–5 year turnover for a majority of Class 7 and Class 8 tractors. Volvo commented that there should not be a retrofit of trucks because the changes to the vehicle are too significant, and there is no way to assure the quality of the retrofit.

Meritor WABCO stated that there should not be a retrofit of vehicles because, as a system supplier, it does not offer an ESC system retrofit option. Meritor WABCO also specified that ESC systems must be engineered and validated for each vehicle model and parts must be added, which would be difficult to do on in-service vehicles. Meritor WABCO further stated that an ESC system requires a steering wheel angle sensor, which is difficult to design for in-service vehicles. Meritor WABCO also expressed concern about the

possibility of incomplete or incorrect retrofit installations if retrofits are required.

The National Ready Mix Concrete Association argued that there should not be an ESC system retrofit requirement on single-unit trucks or truck tractors because retrofit costs will be higher on existing trucks than installations on new trucks. They further stated that a variety of improvised techniques are needed when doing retrofit installations, and these techniques result in higher maintenance costs. They were also concerned that a retrofitted system would not work on some older trucks because of unworkable truck designs and interference with safety and electronic features.

HDBMC stated that there should be no retrofit requirement because retrofitting of ESC systems is impractical and difficult. HDBMC cited the challenges of ESC system retrofitting, which include: (1) Compatibility of the vehicle; (2) computer hardware and software issues; (3) issues with new component installation; (4) vehicle downtime to make the conversion; (5) testing and validation; and (6) further unknown variables.

EMA asserted that it would be unsafe to implement a retrofit requirement because ESC systems are not currently installed over existing components. EMA also believes that aftermarket facilities do not have the capability to design, test, and implement ESC systems. EMA stated that rotational sensors, yaw rate, and lateral accelerometers must be mounted close to the vehicle's center of yaw rotation, or complex calculations must be used to compensate for any deviations in the mounting. Finally, EMA commented that the necessary components for an ESC system do not exist for older vehicle models.

Bendix commented that it had, for the purposes of research and development, retrofitted ESC to more than 25 vehicles. Bendix estimated that retrofitting in-service vehicles would take between 80 and 120 person-hours for installation because each installation would have to be customized and there would be little or no OEM support.

After considering the public comments, NHTSA has decided not to include a retrofit requirement in this final rule. NHTSA recognizes that the costs and safety risks of mandating an ESC system retrofit may exceed the benefits. Those commenters supporting an ESC system retrofit did not provide any information to mitigate issues such as: (1) The complexity and cost to retrofit in-service vehicles with ESC systems; (2) the changes necessary to

integrate the ESC system to the vehicle's chassis, engine, and braking system; (3) the changes necessary on the in-service vehicle to interface with the ESC system such as plumbing for new air brake valves and lines and a new electronic control unit for the ABS system; and (4) the additional requirements for in-service vehicles considering the uniqueness of the maintenance condition of the tire and brake components. Considering that the potential safety risks and certain high costs associated with a requirement to retrofit in-service vehicles with ESC systems greatly exceed the benefits, NHTSA has not included a retrofit requirement in this final rule.

X. Performance Testing

A. NHTSA's Proposed Performance Tests

The agency's research initially focused on a variety of maneuvers that we could use to evaluate the roll stability performance and the yaw stability performance of truck tractors and large buses. Several of these maneuvers were also tested by industry and some of them are allowed for use in testing for compliance to the UN ECE stability control regulation. The agency's goal was to develop one or more maneuvers that showed the most promise as repeatable and reproducible roll and yaw performance tests for which objective pass/fail criteria could be developed. Based on the agency's own testing and the results from industry-provided test data, two stability performance tests were proposed to evaluate ESC systems on truck tractors and large buses—the SIS test and the SWD test.

1. Characterization Test—SIS

The agency proposed using the slowly increasing steer maneuver (SIS) as a characterization test to determine the unique dynamic characteristics of a vehicle. This maneuver would allow the agency to determine the relationship between the steering wheel angle and lateral acceleration of a vehicle. Also as part of the SIS characterization test, the ability of the ESC system to reduce engine torque is determined. During each of the SIS maneuvers, ESC activation is confirmed by verifying that the system automatically reduces the driver requested engine torque output. The NPRM proposed that, for each of the SIS maneuver test runs, the commanded engine torque and the driver requested torque signals must diverge at least 10 percent for 1.5 seconds after the beginning of ESC system activation. This test

demonstrates that the ESC system has the capability to reduce engine torque, as required in the functional definition. The vehicles that the agency tested were all able to meet this proposed performance level.

2. Roll and Yaw Stability Test—SWD

In the NPRM, we proposed using the sine with dwell maneuver (SWD) to test the ability of an ESC system to mitigate conditions that would lead to rollover or loss of control. Conceptually, the steering profile of this maneuver is similar to that expected to be used by real drivers during some crash avoidance maneuvers. As the agency found in the light vehicle ESC research program, the severity of the SWD maneuver makes it a rigorous test, while maintaining steering rates within the capabilities of human drivers. We believed that the maneuver is severe enough to produce rollover or vehicle loss-of-control without a functioning ESC system on the vehicle.

The agency's test program was able to develop test parameters for the SWD maneuver so that both roll stability and yaw stability could be evaluated using a single loading condition and test maneuver. Previously, the SWD maneuver had typically been used to evaluate only the yaw instability of a vehicle. NHTSA evaluated several loading conditions and found that a loading condition of 80 percent of the tractor's GVWR enabled us to evaluate both the yaw and roll stability control of the ESC system.

For a truck tractor, the agency would conduct the SWD test with the truck tractor coupled to an unbraked control trailer and loaded with ballast directly over the kingpin. The combination vehicle would be loaded to 80 percent of the tractor's GVWR. For a bus, the vehicle is loaded with a 68 kilogram (150 pound) ballast in each of the vehicle's designated seating positions, which would bring the vehicle's weight to less than its GVWR. The test vehicles were proposed to be equipped with outriggers to prevent the trailer from rolling over in case the ESC system does not function properly.

The SWD test would be conducted at a speed of 72 km/h (45 mph). An automated steering machine would be used to initiate the steering maneuver. Each vehicle is subjected to two series of test runs. One series uses counterclockwise steering for the first half-cycle, and the other series uses clockwise steering for the first half-cycle. The steering amplitude for the initial run of each series is 0.3A, where A is the steering wheel angle determined from the SIS maneuver. In

each of the successive test runs, the steering amplitude would be increased by increments of 0.1A until a steering amplitude of 1.3A or 400 degrees, whichever is less, is achieved. Upon completion the test runs, the agency would conduct post-processing of the yaw rate and lateral acceleration data to determine the lateral acceleration ratio, yaw rate ratio, and lateral displacement, as discussed below.

The lateral acceleration ratio (LAR) is a performance metric developed to evaluate the ability of a vehicle's ESC system to prevent rollovers. Lateral acceleration is measured on a bus or a tractor and corrected for the vehicle's roll angle. As a performance metric, the lateral acceleration value is normalized by dividing it by the maximum lateral acceleration that was determined at any time between 1.0 seconds after the beginning of steering and the completion of steering. The two proposed performance criteria are described below:

- A vehicle must have a LAR of 30 percent or less 0.75 seconds after completion of steer.
- A vehicle must have a LAR of 10 percent or less at 1.5 seconds after completion of steer.

The yaw rate ratio (YRR) is a performance metric used to evaluate the ability of a vehicle's ESC system to prevent yaw instability. The YRR expresses the lateral stability criteria for the sine with dwell test to measure how quickly the vehicle stops turning, or rotating about its vertical axis, after the steering wheel is returned to the straight-ahead position. The lateral stability criterion, expressed in terms of YRR, is the percent of peak yaw rate that is present at designated times after completion of steer. This performance metric is identical to the metric used in the light vehicle ESC system performance requirement in FMVSS No. 126. The two proposed performance criteria are described below:

- A vehicle must have a YRR of 40 percent or less 0.75 seconds after completion of steer.
- A vehicle must have a YRR of 15 percent or less at 1.5 seconds after completion of steer.

3. Lateral Displacement

Lateral displacement is a performance metric used to evaluate the responsiveness of a vehicle, which relates to its ability to steer around objects. Stability control intervention has the potential to significantly increase the stability of the vehicle in which it is installed. However, we believe that these improvements in vehicle stability should not come at the

expense of poor lateral displacement in response to the driver's steering input.

A hypothetical way to pass a stability control performance test would be to make either the vehicle or its stability control system intervene simply by making the vehicle poorly responsive to the speed and steering inputs required by the test. An extreme example of this potential lack of responsiveness would occur if an ESC system locked both front wheels as the driver begins a severe avoidance maneuver that might lead to vehicle rollover. Front wheel lockup would create an understeer condition in the vehicle, which would result in the vehicle plowing straight ahead and colliding with an object the driver was trying to avoid. It is very likely that front wheel lockup would reduce the roll instability of the vehicle since the lateral acceleration would be reduced. This is clearly, however, not a desirable compromise.

Because a vehicle that simply responds poorly to steering commands may be able to meet the stability criteria proposed in the NPRM, a minimum responsiveness criterion was also proposed for the SWD test. The proposed lateral displacement criterion was that a truck tractor equipped with stability control must have a lateral displacement of 2.13 meters (7 feet) or more at 1.5 seconds from the beginning of steer, measured during the sine with dwell maneuver. For a bus, the proposed performance criterion is a lateral displacement of 1.52 meters (5 feet) or more at 1.5 seconds after the beginning of steer. The lateral displacement criteria is less for a bus because a large bus has a longer wheelbase than a truck tractor and higher steering ratio, which makes it less responsive than a truck tractor.

B. Comments on SIS and SWD Maneuvers

The agency received many comments, particularly from representatives of ESC system, truck tractor, and bus manufacturers specifically addressing the slowly increasing steer and sine with dwell maneuvers proposed in the NPRM. The comments raised issues regarding the relevance of the SWD and SIS tests, the amount of space required to perform the test, and the automated steering machine.

Daimler Trucks North America (DTNA), the ATA, and Navistar claimed the SWD was not representative of a real-world maneuver. EMA stated the no manufacturer to date was using the SWD maneuver to test and validate an ESC system. Navistar claimed the standard width of a highway lane does not allow room for the SWD maneuver

to be completed. EMA shared Navistar's belief that a driver of a truck tractor would require 6 to 8 lanes of road width to perform a SWD maneuver on a roadway, and the SWD test is unlike any maneuver likely to occur on public roads.

DTNA asserted that the SWD test fails to provide adequate pass/fail criteria as an ESC performance test. Similarly, Volvo stated that the SWD performance test criteria is impractical and unnecessary because there are established validation test methods available and in use.

DTNA, Navistar, and EMA suggested that tuning the ESC system to pass the SWD test could compromise the system performance. Navistar reasoned that focusing on the SWD test would diminish the amount of design work done to optimize ESC performance for other conditions. Navistar also speculated that some ESC systems may not comply with the SWD test and may require a lengthy research and development plan to redesign the systems. On the other hand, Bendix Commercial Vehicle Systems (Bendix) assured the agency that tractors equipped with the current Bendix ESC systems could pass the proposed SWD and SIS tests.

DTNA and EMA alleged that there would be additional burdens and restrictions on manufacturers caused by a SWD performance test. DTNA stated that manufacturers have a burden to conduct extensive ESC testing because of the lack of experience with the SWD test. EMA claimed that heavy vehicle options would be restricted to ensure compliance with the SWD test. Neither commenter provided details to support its claims.

We also received comments on the amount of space required to conduct SIS and SWD tests. According to Navistar, EMA, and Bendix, the SWD and SIS tests require a large area in order to perform the tests. Navistar, EMA, DTNA, Volvo, and the HDBMC claimed that the Transportation Research Center (TRC) in Ohio is the only test facility large enough to perform the SWD and SIS tests. Based on this belief, they assume an increase in the number of manufacturers using TRC will limit the test facility availability. Bendix provided data and calculations to support its recommendation for the test area dimensions needed to safely perform the SIS and SWD tests. According to Bendix, the SIS test needs an area of 176 m (563.2 ft.) by 151 m (483.2 ft.), and the SWD test needs a smaller area of 112 m (358.4 ft.) by 58 m (185.6 ft.). Bendix further argued that the ESC performance tests should be

portable, meaning that any test facility that can run FMVSS No. 121 tests should be able to run FMVSS No. 136 tests.

In the NPRM, we proposed using a steering machine to provide the steering wheel inputs for the vehicles during the SIS and SWD tests. Advocates recommended that the SWD and SIS tests should be required along with an automated steering machine. However, Bendix, Volvo, and EMA expressed concern regarding the steering machine and the capabilities of a vehicle's steering system to perform the SWD maneuver. Bendix stated that the steering robot specified in the NPRM is inadequate and suggested that more research needs to be done to find a steering controller more suited for large vehicles. According to Volvo, the same steering machine requirements as those found in FMVSS No. 126 would not be sufficient for heavy vehicles. EMA and Bendix expressed concerns that the SWD requires steering inputs that approach the limit of what a human being can accomplish. EMA also claims the SWD test exceeds the capacity of power steering systems on some tractors, which affects the results of the SWD and exposes the driver to safety risks.

Commenters also addressed the costs of conducting the proposed SIS and SWD tests. ATA and EMA stated that the proposed SWD test would be costly because of the logistics and preparation costs to test at TRC. Navistar said that a new facility would need to be built to conduct the SWD tests at an estimated cost of \$4 to 6 million plus additional costs for maintenance and repair of the facility.

Meritor WABCO, EMA, and Volvo provided estimates regarding the costs and burden of conducting the SWD test. Meritor WABCO commented that the tests are too costly and estimated the costs to be in excess of \$28,000 per tractor. EMA claimed the SWD is too expensive because heavy vehicles have many variations, small volumes, and typically testing is performed on saleable vehicles. EMA estimated that each truck tractor manufacturer would need to run 50 to 80 tests for its 6x4 tractors causing a high cost for the SWD testing, which is spread out over a low production volume of heavy vehicles. EMA further commented that manufacturers might have to redesign steering systems to comply in order to perform the SWD tests, which would further increase the costs. Additionally, EMA claims NHTSA did not test any severe service tractors using SWD testing, and the sample of truck tractors NHTSA tested was too narrow to

support the proposal. Further EMA criticized NHTSA's test program for using only one control trailer and one test facility. Volvo alleged that the proposed performance tests could potentially damage test vehicles, and some manufacturers conduct assurance tests on customer vehicles.

C. Alternative Maneuvers Considered in the NPRM

We considered other test maneuvers besides the SIS and SWD tests in the NPRM. The SWD maneuver was chosen in the NPRM over other maneuvers because our research demonstrated that it has the most optimal set of characteristics, including the severity of the test, repeatability and reproducibility of results, and the ability to address rollover, lateral stability, and responsiveness. However, we left within the scope of the NPRM several other test maneuvers that could be used to test an ESC system's ability to mitigate instability.

With respect to rollover instability mitigation, we discussed the ramp steer maneuver (RSM) and J-turn maneuver. The two tests are similar in that both maneuvers require the tested vehicle to be driven at a constant speed and then the vehicle is turned in one direction for a certain period of time. The test speed and the severity of the turn are designed to cause a test vehicle to approach or exceed its roll stability threshold such that, without a stability control system, the vehicle would exhibit signs of roll instability. Both tests would be performed with the tractor loaded to its GVWR. Furthermore, we do not expect a vehicle that could pass one test to fail the other.

The most notable difference between the J-turn and the RSM maneuvers is that the J-turn is a path-following maneuver. That is, it is performed on a fixed path curve. In contrast, the RSM maneuver is a non-path-following maneuver that is performed with a fixed steering wheel input determined for each vehicle. For example, during the agency's and EMA's testing, the J-turn maneuver was performed on a 150-foot radius curve. In contrast, the RSM is performed based on a steering wheel angle derived from the SIS test. We expect that, with the RSM, the radius of the curve would be close to the fixed radius used in the J-turn maneuver. However, in the RSM, the vehicle would be steered with a steering controller and the driver would not have to make adjustments and corrections to steering to maintain the fixed path.

We included both maneuvers in our roll stability testing. We also included possible performance metrics. For the

RSM, these performance metrics were included in the preamble to the NPRM. For the J-turn maneuver, the performance metrics were included in materials supporting the NPRM that were placed in the docket.⁴⁵

When comparing the J-turn to the RSM in the NPRM, the agency considered the RSM to be a preferable test maneuver because the RSM maneuver can be performed with an automated steering wheel controller. Because the J-turn is a path-following maneuver, a test driver must constantly make adjustments to the steering input for the vehicle to remain in the lane throughout the test maneuver. Moreover, driver variability could be introduced from test to test based upon minor variations in the timing of the initial steering input and the position of the test vehicle in the lane.

In addition, the RSM appeared to be more consistent because it involves a fixed steering wheel angle rather than a fixed path. There is negligible variability based on the timing of the initial steering input because the test is designed to begin at the initiation of steering input, rather than the vehicle's position on a track. Moreover, an automated steering wheel controller can more precisely maintain the required steering wheel input than a driver can. Therefore, we tentatively concluded that the RSM is more consistent and more repeatable than the J-turn, which is critical for agency compliance testing purposes.

Notwithstanding the above observations, we recognized that many manufacturers perform NHTSA's compliance tests in order to certify that their vehicles comply with NHTSA's safety standards. We also recognize that, over time, manufacturers are likely to use other methods such as simulation, modeling, etc., to determine compliance with Federal Motor Vehicle Safety Standards. In this regard, we observed that, because the J-turn and the ramp steer maneuvers are so similar, manufacturers may be able to determine compliance with a stability control standard by using the J-turn maneuver even if the agency ultimately decided to use the RSM for compliance testing. Thus, if a manufacturer sought to certify compliance based upon performance testing, a manufacturer would not necessarily need to perform compliance testing with an automated steering controller.

The RSM would use a similar, but not identical lateral acceleration ratio performance metric to evaluate roll stability. As with the SWD maneuver, the LAR used in the RSM would indicate that the stability control system is applying selective braking to lower lateral acceleration experienced during the steering maneuver. In the SWD maneuver, the LAR is the ratio of the lateral acceleration at a fixed point in time to the peak lateral acceleration during the period from one second after the beginning of steer to the completion of steer. In contrast, the LAR metric we would use for the RSM would be the ratio of the lateral acceleration at a fixed point in time to the lateral acceleration at the end of ramp input, which is the moment at which the steering wheel angle reaches the target steering wheel angle for the test. Also, in contrast to the SWD maneuver, the LAR measurements for the RSM would be taken at a time when the steering wheel is still turned. This means that, although the SWD maneuver is a more dynamic steering maneuver, the LAR criteria for the RSM would be greater than the LAR criteria for the SWD maneuver. The performance criteria for the RSM would depend on whether fixed-rate steering or fixed-time steering input is used.

In a March 2012 submission given to the agency prior to the publication of the NPRM, which was revised with additional details in April 2012, EMA suggested that NHTSA use different test speeds and performance criteria for the J-turn maneuver.⁴⁶ EMA suggested that a test speed that is 30 percent greater than the minimum speed at which the ESC system intervenes with engine, engine brake, or service brake control. Instead of measuring LAR, EMA suggested that, during three out of four runs, the vehicle would be required to decelerate at a minimum deceleration rate. NHTSA has conducted testing on variations of this EMA maneuver, and we suggested that we would conduct further testing. We requested comments on EMA's suggested test procedure and performance criteria for the J-turn maneuver.

After evaluating several maneuvers on different surfaces, the agency was unable to develop any alternative performance-based dynamic yaw test maneuvers that were repeatable enough for compliance testing purposes. Bendix described two maneuvers intended to evaluate the yaw stability of tractors.⁴⁷

However, neither of these test maneuvers was developed to a level that would make them suitable for the agency to consider using as yaw performance tests.

In July 2009, EMA provided research information on several yaw stability test maneuvers.⁴⁸ One of these maneuvers was the SWD on dry pavement that is similar to what was proposed in the NPRM. The second maneuver was a SWD maneuver conducted on wet Jennite. The third maneuver was a ramp with dwell maneuver on wet Jennite.⁴⁹ EMA did not provide any test data on the last two maneuvers. Thus, we considered them to be concepts rather than fully developed maneuvers that we could consider using for yaw stability testing.

We received no other alternative yaw performance tests from industry until EMA's submission of data in late 2010.⁵⁰ EMA suggested using a wet Jennite drive through test maneuver demonstrated yaw performance in a curve on a low friction surface. The maneuver is based upon a maneuver the agency currently conducts on heavy vehicles to verify stability and control of antilock braking systems while braking in a curve. As part of the test, a vehicle is driven into a 500-foot radius curve with a low-friction wet Jennite surface at increasing speeds to determine the maximum drive-through speed at which the driver can keep the vehicle within a 12-foot lane. As with the J-turn, we are concerned about the repeatability of this test maneuver because of variability in the wet Jennite test surface and the drivers' difficulty in maintaining a constant speed and steering input in the curve.

In a March 2012 submission, which was revised with additional details in April 2012, EMA provided information about another yaw stability test along with additional information on the J-turn maneuver.⁵¹ This maneuver simulates a single lane change on a wet roadway surface. It is to be conducted within a 3.7 meter (12 foot) wide path. The roadway condition is to be a wet, low friction surface such as wet Jennite with a peak coefficient of friction of 0.5. The other test conditions (*i.e.*, road conditions, burnish procedure, liftable axle position, and initial brake temperatures) are similar to those proposed in the NPRM. In this

⁴⁸ Docket No. NHTSA-2010-0034-0035.

⁴⁹ This ramp with dwell maneuver is the same one identified by Bendix referenced in the prior paragraph and in section IV.E.3.

⁵⁰ Docket No. NHTSA-2010-0034-0022; Docket No. NHTSA-2010-0034-0023.

⁵¹ Docket No. NHTSA-2010-0034-0032; Docket No. NHTSA-2010-0034-0040.

⁴⁵ See "Tractor Semi-Trailer Stability Objective Performance Test Research—Roll Stability," Docket No. NHTSA-2010-0034-0009 Pages xiv, 18, 22-27, 35.

⁴⁶ Docket No. NHTSA-2010-0034-0032; Docket No. NHTSA-2010-0034-0040.

⁴⁷ These tests are discussed in section IV.E.3. See Docket No. NHTSA-2010-0034-0037 and Docket No. NHTSA-2010-0034-0038.

maneuver, the truck enters the path at progressively higher speeds to establish the minimum speed at which the ESC system intervenes and applies the tractor's brakes. The maneuver is then repeated four times at that speed with the vehicle remaining within the lane at all times during the maneuver. EMA suggests, as a performance criterion, that during at least three of the four runs, the ESC system must provide a minimum level (presently unspecified) of differential braking. At the NPRM phase, the agency had not had an opportunity to conduct testing of this maneuver, but we expressed an intention to determine whether this is a viable alternative yaw stability test. The agency requested comment on all aspects of EMA's yaw stability test discussed in its March and April 2012 submissions, including the test conditions, test procedure, and possible performance criteria that would allow the agency to test both trucks and buses with this maneuver.

D. Comments on Alternative Test Maneuvers

Seven commenters (Daimler, Volvo, Meritor WABCO, Navistar, HDMA, EMA, and Bendix) recommended that NHTSA adopt alternative dynamic performance test maneuvers instead of the SIS and SWD. These alternative maneuvers were either described in the NPRM or included in comments submitted in response to the NPRM.

EMA submitted a comment including general test conditions for a J-turn maneuver to test roll stability and a single lane change on a wet surface to test yaw stability. In a later submission, EMA provided actual test information and suggested performance criteria based on data gathered at two different test facilities using 10 different truck tractors. Daimler, Meritor WABCO, HDMA, EMA, and Bendix supported adopting EMA's J-turn test maneuver as the performance test requirement for testing roll stability.

The J-turn maneuver described in EMA's submissions uses a test course with straight lane connected to a 45.7-meter (150-foot) radius, a lane width of 3.7 meters (12 feet), and a surface coefficient of 0.9. The test speed of the maneuver is determined by driving a vehicle on the test course and identifying the minimum vehicle speed that causes the ESC system to apply the service brakes. That speed is the reference speed. The vehicle is then driven on the test course, entering the curve at 1.3 times the reference speed. The deceleration rate is determined from a time starting at when the ESC system activates the service brakes. The

brakes are considered to be activated when at least 35 kPa (5 psi) is observed at the service brakes. EMA recommended that four test runs be performed and that the deceleration rate must be at least 0.91 m/s² (3.0 ft./s²) in three of the four test runs.

With respect to the SWD test in the agency's proposal, EMA stated that the SWD maneuver is nearly identical to the maneuver used in FMVSS No. 126. However, in FMVSS No. 126, NHTSA stated that the maneuver was only used to test yaw stability, not roll stability. EMA observed that heavy vehicles are different from light vehicles because they have higher centers of gravity and are more likely to roll over than to lose directional control. Because the SWD test does not test roll stability on light vehicles, EMA reasoned that the maneuver should not be used to test roll stability on heavy vehicles.

Regarding yaw testing, EMA disagreed with NHTSA's assessment in the NPRM that low friction surfaces such as wet Jennite may be too variable to conduct ESC testing, citing NHTSA's use of wet Jennite in testing air brake performance in FMVSS No. 121. EMA recommended using a test course with an overall length of 58.5 meters (192 feet). The vehicle proceeds into the maneuver in a 3.1-meter (10-foot) wide entrance lane. A steering maneuver is made within 28 meters (92 feet), and the vehicle completes the maneuver by entering a second 3.7-meter (12-foot) wide departure lane with a length of 15.2 meters (50 feet). The coefficient of friction of the road surface is 0.5. The maneuver is similar to a single lane change on a wet surface test. The test is conducted at a speed that is 1.6 km/h (1 mph) greater than the reference speed determined in the rollover maneuver. The vehicle is driven on the test course for four test runs at the test speed and the brake pressure is measured at opposite wheel ends. EMA recommended that a differential brake pressure of at least 69 kPa (10 psi) in three of the four test runs as a minimum performance requirement.

Daimler, HDMA, EMA, and Bendix recommended that NHTSA adopt the single lane change maneuver described in EMA's comment for testing yaw stability, if the test is workable. Otherwise, they recommended removing performance requirements related to yaw stability, leaving only an equipment definition requiring yaw stability performance.

Other commenters had similar views on yaw testing. For example, Meritor WABCO recommended that NHTSA should wait to test yaw stability until it could develop a new yaw stability test.

Bendix submitted test data and criteria using a ramp with dwell maneuver, which it suggested could be used for testing both the roll and yaw stability of a vehicle. IIHS did not endorse a particular performance test, but made a general statement that there should be a requirement of performance tests for ESC.

Furthermore, EMA agrees with NHTSA's assessment that it is difficult to test for understeer control. EMA believes that the reasoning for not testing understeer control in FMVSS No. 126 can be carried over to heavy vehicle ESC. In that rulemaking, NHTSA concluded that the understeer prevention requirement that was included in the system capability requirements was objective, even without a performance test.⁵²

E. NHTSA Examination and Testing of EMA Maneuvers

In response to the March and April 2012 submission from EMA and additional data submitted to the agency in June 2012 and November 2012 after the issuance of the NPRM containing results of additional tests discussed by EMA, the agency conducted its own testing in 2013 using EMA's suggested rollover performance maneuver.⁵³ The results of this testing are summarized in the reports: (1) "2013 Tractor Semitrailer Stability Objective Performance Test Research—150-Foot Radius J-Turn Test Track Research;" (2) "Stability Control System Test Track Research with a 2014 Prevost X3-45 Passenger Motorcoach;" and (3) "Stability Control System Test Track Research with a 2014 Van Hool CX45 Passenger Motorcoach."⁵⁴ This section provides a summary of these reports.

These reports do not address the yaw stability performance maneuver suggested by EMA to test yaw stability. EMA's lane change maneuver test is performed on a wet level surface with a peak friction coefficient of 0.5. NHTSA's past test results with this test surface and similar performance maneuvers has shown that ESC systems have the capability to improve vehicle yaw and roll stability performance on low friction surfaces. However, vehicle handling characteristics dictated the performance of the vehicle on low friction surfaces. Test data revealed that, depending on whether the tractor

⁵² 72 FR 17261 (Apr. 6, 2007).

⁵³ Docket No. NHTSA-2010-0034-0032; Docket No. NHTSA-2010-0034-0040; Docket No. NHTSA-2012-0065-0059; Docket No. NHTSA-2012-0065-0060.

⁵⁴ Docket No. NHTSA-2012-0065-0062; Docket No. NHTSA-2012-0065-0063; Docket No. NHTSA-2012-0065-0064.

understeered or oversteered with respect to the trailer, the ESC system behavior changed. Under such varying behaviors, measures of performance that were investigated could not be standardized to capture the benefits of an ESC system over the whole range of vehicles tested. We have concluded that objective performance tests for ESC using a low friction surface requires additional data analysis, maneuver design, and test procedure development, which would require further delaying this final rule with no assurance that an acceptable maneuver on a low-friction surface could be developed. Therefore, we have not further tested EMA's suggested yaw performance maneuver. We may investigate this maneuver in the future.

The main objective of NHTSA's truck-tractor testing was to gain additional experience with a the 150-foot radius J-turn maneuver procedures suggested by EMA and to collect test track performance data on air braked truck tractors equipped with stability control system. The agency conducted tests on three class 8 air-braked truck tractors and two control trailers. The three trucks used were a 2006 Freightliner 6x4 equipped with separate RSC and ESC systems, a 2006 Volvo 6x4 equipped with an ESC system, and a 2011 Mack 4x2 equipped with an ESC system.

The test procedures were derived from those EMA submitted in April 2012, which the agency placed in the docket with the NPRM.⁵⁵ The test course consisted of a 12-foot wide curved lane with a 150-foot radius measured from the center of the lane and a peak surface friction coefficient of

0.9. The curved lane formed a semicircle, and a straight lane used for bringing the vehicle up to speed was oriented tangentially at both ends of the curved lane. This allowed the same test course to be used in both a clockwise and counterclockwise orientation. The agency placed cones at every 11.25 degrees of arc angle to mark the inner and outer lane boundaries.

Prior to testing, the test tractors were loaded to the GVWR by attaching them to one of the two unbraked control trailers used for testing. The remaining test conditions (*i.e.*, road surface friction, ambient temperature conditions, burnish procedure, liftable axle conditions) largely mirrored those specified in FMVSS No. 121 for testing air brakes, which also generally mirrored the test conditions set forth in the NPRM.

The test driver maneuvered the test vehicle into the straight lane and approached the curve, then traveled through the 180 degrees of arc in the curve. The driver attempted to steer the vehicle in such a manner that it stayed in the lane throughout the maneuver. The brake pressure was measured at each wheel end and was monitored using a computer. All maneuvers were conducted in one direction, and then the entire procedure was completed in the opposite direction, so that vehicles were tested both clockwise and counterclockwise independently. The test sequence was repeated for each of the test vehicles and, for the Freightliner, repeated separately with the ESC and RSC systems enabled.

Each test was conducted at a specified entrance speed, with a tolerance of +/- 1 mph, which the driver would

reach and maintain prior to entering the curve. The test driver released the throttle two or more seconds after the stability control system intervened with either torque reduction or brake application. However, it was discovered that it was easier for the test driver to control speed if throttle was maintained until the stability control system reduced the vehicle's forward speed by 2 to 3 mph.

Initially, vehicles were tested with an entrance speed of 20 mph. Additional test runs were conducted at entrance speeds increased incrementally by 1 mph until a reference speed could be determined. The reference speed was the speed at which the stability system intervened with at least 5 psi of service brake pressure. Additional tests were conducted at speeds incremented by 1 mph until the target test speed was reached, which was 130 percent of the reference speed. Four additional test runs were conducted at the target test speed.

Near the end of testing, the agency conducted four additional test runs at the reference speed, during which the test driver fully depressed the accelerator pedal after crossing the start gate. The purpose of this testing was to evaluate the stability control system's ability to reduce driver-commanded engine torque.

Following this procedure, the agency determined reference speeds and target test speeds for each test vehicle connected to each of the control trailers and run in each direction. All vehicles tested had the ESC systems intervene at entrance speeds not greater than 30 mph. The results are summarized in the following table.

TABLE 3—REFERENCE SPEED, TARGET TEST SPEED, AND LANE VIOLATIONS OBSERVED DURING 150-FOOT J-TURN TESTS

Tractor	Control trailer	Reference speed (mph)		Target test speed (mph) [Reference Speed × 1.3]		Lane violations observed at or below the target test speed	
		Counter-clockwise	Clockwise	Counter-clockwise	Clockwise	Counter-clockwise	Clockwise
Freightliner 6×4 ESC ...	1	28	28	36	36	0	0
	2	27	28	35	36	0	0
Freightliner 6×4 RSC ...	1	30	26	39	34	2	0
	2	Not Tested	Not Tested	Not Tested	Not Tested	—	—
Mack 4×2 ESC	1	25	24	33	31	0	0
	2	25	24	33	31	0	0
Volvo 6×4 ESC	1	26	26	34	34	0	0
	2	26	25	34	33	0	0

EMA suggested, as the performance metric, that the ESC system decelerate the vehicle at a rate greater than 3 ft./

s² during three of four test runs at an entrance speed of 130 percent of the reference speed. In addition to

evaluating EMA's suggested performance metric, the agency considered additional performance

⁵⁵ Docket No. NHTSA-2010-0034-0040.

metrics for evaluating roll stability performance. In its roll stability test development, the agency had considered lateral acceleration and forward speed as possible roll stability performance metrics.⁵⁶

NHTSA's past test track research showed that tractors pulling trailers with high centers-of-gravity have a high probability of rolling over in a 150-foot radius curve when speeds exceeded 30 mph.⁵⁷ Tractors equipped with ESC systems, driven under the same scenario, were slowed down by the ESC systems and consequently, roll instability was mitigated. These observations guided comparisons in performance and allowed the agency to develop speed-based performance metrics relative to the entrance to the 150-foot curve. Specific speed thresholds can be established as a performance metric.

In the agency's testing using a high center-of-gravity load, roll instability (wheel lift) was first observed in tests generating approximately 0.4g of lateral acceleration at the tractor's center of gravity. Wheel lift was generally observed between 3 and 4 seconds after the steering input, which is when 0.4g of lateral acceleration was sustained. Based on these observations, the agency set the tractor lateral acceleration thresholds for roll stability during the 150-foot J-turn maneuver at a maximum of 0.375 g at 3.0 seconds after the vehicle crossed the start gate and 0.350 g at 4.0 seconds after the vehicle crossed the start gate.

However, because the radius of the curved portion of the track is fixed, these lateral acceleration thresholds can be related to speed thresholds using the formula $A=V^2/R$, where A is the lateral acceleration, V is the vehicle's forward speed, and R is the radius of the curve. Inserting the specified lateral acceleration levels and the radius of the curve, the agency's lateral acceleration thresholds converted to maximum speed thresholds of 29 mph and 28 mph at 3.0 and 4.0 seconds, respectively.

Each tractor and stability control system tested exceeded EMA's suggested 3 ft./s² minimum deceleration test criteria. Each tractor and stability control system tested also exceeded NHTSA's speed and lateral acceleration thresholds.

F. Roll Stability Performance Test—J-Turn Test

1. Rationale for Using J-Turn Test

NHTSA has decided to substitute the J-turn maneuver in place of the SIS and SWD maneuvers as the performance test for an ESC system. The J-turn test will be used to evaluate the roll stability of a vehicle. Likewise, the J-turn will also be used to ensure that the ESC system reduces engine torque to the wheels. Because the J-turn is conducted on a fixed curve, longitudinal velocity (speed) directly correlates to lateral acceleration. NHTSA has determined that the J-turn test is the most cost-effective and least burdensome alternative that achieves the objectives of the ESC rule. Moreover, the roll stability mitigation performance requirements associated with the J-turn maneuver are comparable to the minimum performance requirements associated with the SWD maneuver proposed in the NPRM.

To be clear, however, the agency rejects much of the criticism of the SWD maneuver in the comments from truck manufacturers. Although we are abandoning the proposed SIS and SWD maneuver in favor of a J-turn maneuver to test roll stability in this final rule, NHTSA still considers the SWD test to be a viable test to measure the minimum performance of an ESC system on a heavy vehicle.

We do not agree with the commenters' assertions about the relevance of the SWD maneuver. The lack of voluntary adoption of the SWD test by vehicle manufacturers does not, by itself, make the SWD test irrelevant.

Likewise, the comments regarding the width of public roads and how the maneuver is not likely to occur on public roads are inapposite. The purpose of the performance test is to determine the minimum performance requirements of ESC systems using an objective and repeatable test. The fact that the SWD test will not be performed on public roads and must be performed on a test track, which can be 6 to 8 lanes of public road width or larger, is not by itself a persuasive argument that the test is irrelevant.

Nor does the agency agree with the commenters suggesting that additional design work would be necessary in order for vehicles to meet SWD performance requirement. None of the commenters suggesting additional design work was necessary submitted information to justify the assertion. Moreover, Bendix, a system supplier, asserted that current ESC systems could pass the proposed SWD test. NHTSA's own testing using two typical 6x4

tractors each equipped with ESC systems consistently met the proposed performance requirements using the SWD test. In addition, no commenter submitted supporting information describing any specific design compromises that would occur as a result of complying with the SWD test.

Likewise, the agency does not characterize the testing of saleable vehicles as an unnecessary cost increase. Contrarily, performing the tests on saleable vehicles, as opposed to manufacturing a vehicle solely for testing purposes, reduces the amount of cost to a manufacturer. The manufacturers have provided no basis for their assertions that they could not resell vehicles after conducting SWD tests. Although they have asserted that the vehicles may be damaged during testing, NHTSA has not experienced any vehicle damage during its own testing. In response to Volvo's claim of potential damage to vehicles being tested, the agency recognizes that any performance test, if done unsafely, could potentially damage the vehicle being tested.

Nevertheless, NHTSA believes the J-turn test maneuver is more efficient than the SWD test for assessing the roll instability mitigation of ESC systems. The J-turn test can demonstrate roll stability using only a single test. There is no need to analyze and extrapolate data between two separate test maneuvers as there is using the SIS and SWD tests. This will allow the agency to complete a compliance test more quickly using the J-turn than using the SIS and SWD tests.

We did not receive any estimate from EMA or its members regarding the costs to perform the J-turn test. However, EMA and its members did not object to the cost of its suggested performance test, nor did any commenter discuss the difference in cost of the J-turn test versus the SWD and SIS tests. Instead, the agency received a recommendation from dozens of commenters to adopt the J-turn test. The agency estimates that it would cost approximately \$13,400 per truck tractor and \$20,100 per large bus to conduct the full series of J-turn test maneuvers contained in this final rule.

We also note that the J-turn maneuver is similar to the Ramp Steer Maneuver (RSM), which was discussed at length in the NPRM. Both maneuvers use a test course with a straight lane connected to a curved lane. However, the RSM maneuver is an open loop type test, uses an automated steering controller, and requires conducting an SIS maneuver to determine the appropriate steering wheel angle for testing. The J-turn is a path-following maneuver and the vehicle is steered by the driver. We have

⁵⁶ See Docket No. NHTSA-2010-0034-0009.

⁵⁷ See "Tractor Semi-Trailer Stability Objective Performance Test Research—Roll Stability," Docket No. NHTSA-2010-0034-0009; "Tractor Semitrailer Stability Objective Performance Test Research—Yaw Stability," Docket No. NHTSA-2010-0034-0046.

chosen a path-following maneuver over the fixed-steering RSM because of track space concerns regarding the SIS maneuver. We believe that the amount of track space necessary to conduct the SIS maneuver may only be available at one or two test facilities in the United States. While one of these facilities is readily available to NHTSA for compliance testing purposes, we recognize that manufacturers may wish to test their own vehicles as part of their compliance certification.

We emphasize that the adoption of the J-turn maneuver should not in any way diminish the roll stability performance we have observed from ESC systems. The performance criteria associated with the J-turn test maneuver in this final rule have been chosen to ensure a level of roll instability mitigation performance similar to that required to satisfy the SWD maneuver. Although the test is conducted at a lower speed, the radius of the curve will increase lateral acceleration to a level that would generate roll instability in vehicles without ESC systems. We believe that all large trucks and buses equipped with current generation ESC systems will meet the minimum performance requirements just as we believe they would have met the minimum performance requirements associated with the SWD maneuver. Therefore, we do not believe that the use of a different test maneuver will change the expected performance of ESC systems.

We also observe that, like the sine with dwell maneuver, the J-turn maneuver that is one of the demonstration tests in Annex 21 of UN ECE Regulation 13. If a manufacturer chooses the J-Turn test as a demonstration test to show compliance with Annex 21 and can achieve the performance criteria established in this final rule, then there would be compatibility between the performance tests of FMVSS No. 136 and UN ECE Regulation 13.

NTSB provided comments indicating that rollover performance standards should be measured by static rollover stability. NHTSA does not agree with the NTSB's suggestion. NHTSA developed test methods that could evaluate an ESC system's performance dynamically. The goal is to create a measure of performance that will ensure that an ESC system could prevent a rollover. A static stability test would not measure how an ESC system reduces lateral acceleration to reduce untripped rollovers.

2. Test Procedure and Performance Requirements

The J-turn test procedure developed based on EMA's suggestion is a sequential procedure in which the test vehicle is repeatedly driven through a 150-foot radius curve. The test is conducted on the same test course and is generally performed in the manner suggested by EMA with only minor changes added to test lateral responsiveness and to test the ESC system's ability to reduce engine output. We have also modified the minimum performance criteria to use forward speed rather than deceleration rate. We found that using deceleration rate as a minimum performance criteria would not address vehicle wheel lift and subsequent rollover, especially when the vehicle has a load with a high center-of-gravity. EMA's suggestion only measures the braking rate, but it does not measure the ESC system's capability to lower vehicle lateral acceleration to an acceptable threshold.

A diagram of the curve is included in the regulatory text to clarify any ambiguities in the description of the course. Although the lane markings are depicted with dots on the figure, there is no specification for how the lane is marked. It may, for example, be marked with cones or painted lines. Although the figure depicts a counter-clockwise layout, the test is conducted in both directions.

The start gate is placed at the point of the test course where the straight lane section intersects with the curved section of the lane. An end gate is placed on the curved portion of the lane at 120 degrees of arc angle from the start gate. It will take a test vehicle more than 4 seconds to pass through the end gate. Therefore, all of the necessary data will be collected by that point.

For truck tractors, the lane width is 3.7 meters (12 feet) for both the straight section and curved section of the course. However, large buses require additional lane width on the curved section of the course because buses have longer wheelbases, which make it substantially more difficult to maintain a narrower lane within the curve. The large buses that the agency tested did not physically fit in the curved section of the 12-foot lane because of their long wheelbases. During testing, the rear wheels of the buses departed the lane even at very low entrance speeds because of the geometry of the buses, not because of a lack of stability. Therefore, for buses, the lane width on the curved section of the course is 4.3 meters (14 feet).

Each is subjected to multiple J-turn test runs with a test speed starting at 32 km/h (20 mph) and increased in 1.6 km/h (1 mph) increments until ESC service brake activation is observed. The test driver will not apply the service brakes or the engine exhaust braking during the maneuver. For air-braked vehicles, ESC service brake activation occurs when the ESC system causes the pressure in the service brake system to reach at least 34 kPa (5 psi) for a continuous duration of at least 0.5 second. For vehicles with hydraulic brakes, ESC service brake application occurs when the ESC system causes the pressure in the service brake system to reach at least 172 kPa (25 psi) for a continuous duration of at least 0.5 second. This speed is considered the Preliminary Reference Speed. This procedure is conducted separately using clockwise and counterclockwise steering.

The J-turn maneuver is then repeated four times at the Preliminary Reference Speed to confirm that this is the speed at which ESC service brake activation occurs. To do this, four test runs are performed and ESC service brake application is verified. If ESC service brake application is verified, this speed is considered the Reference Speed. If ESC service brake activation does not occur during at least two of the four test runs, the Preliminary Reference Speed is incremented by 1.6 km/h (1 mph) and ESC service brake application is again verified. Again, the Reference Speed is determined for both the clockwise and counterclockwise direction.

Once the Reference Speed is determined, the ESC system's ability to reduce engine torque is verified. Two series of four test runs (one series clockwise, the other series counterclockwise) are conducted at the Reference Speed. During these maneuvers, the driver will fully depress the accelerator pedal after entering the curve and throughout the curve. NHTSA will verify that the engine torque output is less than the driver-requested output. This ensures that the driver's attempt to accelerate the vehicle does not override the ESC service brake application and verifies the system's ability to mitigate instability by reducing engine torque.

Thereafter, the vehicle is subjected to multiple series of test runs (both clockwise and counterclockwise) at an entrance speed up to a maximum test speed, which is up to 1.3 times the Reference Speed, but no less than 48 km/h (30 mph). At a speed between 48 km/h (30 mph) and the maximum test speed, the vehicle is subjected to eight maneuvers, during which ESC service brake activation is verified. The vehicle must be able to meet the roll stability

performance criteria discussed below at any speed between 48 km/h (30 mph) and the maximum test speed.

3. System Responsiveness

The NPRM described the need for a lateral displacement performance metric because of the possibility of a manufacturer making the vehicle poorly responsive to the speed and steering inputs required by the SWD test. The risk of poor lateral displacement in response to the driver's steering input was mitigated by a minimum responsiveness criterion. Although the SWD test is being replaced with the J-turn test, we still need to account for vehicle responsiveness. The nature of the J-turn test provides two criteria for ensuring vehicle responsiveness: Maintaining the lane within the fixed radius curve and a minimum test speed.

The first responsiveness criterion is the requirement that the vehicle maintain the lane during at least six of eight runs in the roll performance test series or at least two of four runs in any other test series. This requirement ensures that, during J-turn test runs at increasing speeds, the ESC system actually activates before the vehicle becomes unstable. We are not imposing this requirement for each test run within a series to account for driver variability and possible driver error in conducting the maneuver. Absent driver error, we do not expect any vehicle equipped with current-generation ESC systems to leave the lane during any J-turn test.

The other responsiveness criterion in this final rule is the minimum vehicle entry speed of 48 km/h (30 mph) for the roll performance test. This will discourage a manufacturer from designing a system that will intervene only at very low speeds, thus artificially decreasing the speed at which the vehicle will enter the curve during the roll performance test.

4. Engine Torque Reduction

As proposed in the NPRM, there must be at least a 10 percent reduction in engine torque when measured 1.5 seconds after the activation of the ESC system. The percent reduction is measured between the actual engine torque output and the driver-requested torque input. This measurement was to be taken during the slowly increasing steer maneuver. However, now that the agency has adopted the J-turn test as its performance test, the SIS test is no longer necessary.

Accordingly, the agency has modified the engine torque reduction test in the NPRM so that it can be used with the J-turn test. The reference speed, which is the lowest test speed at which the

ESC system activated the vehicle's service brakes, is determined as part of the J-turn test sequence. An additional two test series (one using clockwise steering and the other using counterclockwise steering) are conducted after the reference speed is calculated. The driver then fully depresses the accelerator pedal after the vehicle crosses the start gate. After ESC activation occurs, data is collected to determine the difference between the actual engine torque output and the driver requested torque. After analyzing research data from the J-turn testing, we have determined that the ESC system must reduce the driver requested engine torque by at least 10 percent for at least 0.5 second during the time period between 1.5 seconds after the vehicle passes the start gate and when it travels through the end gate. We are not considering reduced engine torque before 1.5 seconds after the vehicle crosses the start gate (and the driver fully depresses the accelerator pedal) because our testing has shown that there is a lag between when the operator of the vehicle requests full throttle and when the vehicle responds by providing full throttle.

5. Roll Stability Performance Requirements

Based on NHTSA's research, for a typical combination vehicle, an ESC system must reduce the heavy vehicle's lateral acceleration to less than 0.4g to prevent wheel lift and possible vehicle rollover.⁵⁸ NHTSA considered how to measure lateral acceleration during the J-turn maneuver. However, lateral acceleration is a function of longitudinal velocity. Using the equation $A=V^2/R$, where A is lateral acceleration, V is longitudinal velocity, and R is the radius of the curve, when driven in a fixed radius curve, with a 45.7-meter (150-foot) radius, 0.4g of lateral acceleration would be achieved at a forward velocity of approximately 48 km/h (30 mph). That is, at speeds below 30 mph, a vehicle would generate less than 0.4g of lateral acceleration and would be unlikely to roll over. This was confirmed in the agency's testing, where the test vehicles remained stable at speeds below 30 mph.

NHTSA track testing has shown that the minimum test speed for effectively testing the ESC system is 48 km/h (30 mph). However, where the ESC system activates at a speed such that 1.3 times the minimum activation speed is greater than 48 km/h (30 mph), the vehicle may be tested at a speed up to 1.3 times the minimum activation speed. A

multiplication factor of 1.3 will be used to ensure that ESC systems operate over a range of speeds. A factor of 1.3 allows the vehicle's ESC system to reach a level where maximum brake force is applied by the system, and, as a result, ensures the ESC system reduces the longitudinal velocity and lateral acceleration of the vehicle are below the threshold values. At factors below 1.3, our testing has shown that ESC systems have not yet achieved their maximum braking force. At factors above 1.3, we have concerns about the safety of testing because the ESC systems have achieved their maximum braking force and the lateral acceleration of the vehicle could remain high.

In contrast, using a performance requirement such as EMA's suggested minimum deceleration metric provides no assurance that the deceleration will be sufficient to prevent rollover. For example, using EMA's suggested procedure, if a vehicle is able to enter a curve at a relatively high rate of speed before an ESC system activates, the performance requirement will be more stringent than if a system is tuned to activate at lower rates of speed. Particularly, if a test is conducted at an entrance speed of less than 48 km/h (30 mph), the system's ability to prevent rollover is not challenged because the vehicle is unlikely to experience lateral forces that have the potential to cause instability, even if the vehicle was not equipped with an ESC system.

We considered, but rejected, using the lateral acceleration ratio, which was the proposed performance criteria for both the SWD maneuver and the alternative RSM, rather than the reduction in absolute lateral acceleration. Using the J-turn maneuver, it was sufficient to ensure that the absolute lateral acceleration was below the threshold for wheel lift after the vehicle has begun its turn. Furthermore, unlike the SWD and RSM maneuver where the beginning of steer can be determined, the beginning of the J-turn maneuver occurs when the vehicle crosses the start gate. At this point, the lateral acceleration of the vehicle is zero or close to zero because the vehicle is traveling in a straight line. After the vehicle crosses the start gate, the driver has some discretion for steering the vehicle and maintaining the lane. The low initial lateral acceleration and the driver variation both make the lateral acceleration ratio an inappropriate performance metric for the J-Turn test. Instead, we found that reduction in the absolute lateral acceleration of a vehicle, which on a fixed curve is a function of velocity, was sufficient to determine the performance

⁵⁸ See 77 FR 30776-78.

of an ESC system with respect to roll stability control.

Thus, the minimum performance requirement to demonstrate roll stability performance in this final rule is expressed in terms of a vehicle's forward speed (longitudinal velocity) at two points in time. The specific requirements are:

- The longitudinal velocity measured at 3.0 seconds after vehicle passes through the start gate to the J-turn maneuver must not exceed 47 km/h (29 mph).
- The longitudinal velocity measured at 4.0 seconds after vehicle passes through the start gate to the J-turn maneuver must not exceed 45 km/h (28 mph).

NHTSA's research indicates that an ESC system's ability to maintain an absolute lateral acceleration below the criteria would provide an acceptable probability that the vehicle would remain stable and that a level of absolute lateral acceleration above the criteria would result in a high probability of the vehicle becoming unstable.

G. Yaw Stability

NHTSA has decided to defer research on the yaw maneuver suggested by EMA, the single lane change on a wet surface test. EMA did not provide any data showing how its performance criterion (differential brake pressure) measures the capability of the ESC system to prevent yaw instability. Moreover, EMA submitted data showing that at least three of its tested vehicles failed to meet the criteria. NHTSA would need to further research the EMA maneuver and determine adequate performance metrics. More data is needed to create criteria that represent appropriate stability thresholds by showing an acceptable probability that the vehicle would remain stable if the ESC system maintains those criteria.

The SWD maneuver was designed to test the ESC system's ability to prevent yaw instability by measuring how quickly the vehicle stops turning, or rotating about its vertical axis, after the steering wheel is returned to the straight-ahead position. The vehicle that continues to turn or rotate about its vertical axis under these conditions is most likely experiencing oversteer, which is what ESC is designed to prevent. EMA's data does not show how its yaw maneuver will adequately test the ESC system's capabilities to prevent oversteer. Likewise, the Bendix test, a ramp with dwell maneuver, will not be examined by NHTSA at this time for yaw stability testing. In order to create

a performance test, NHTSA would need to do further research on the Bendix maneuver and determine adequate performance metrics.

We are also concerned that the maneuver is conducted on a low-friction wet Jennite surface. EMA stated that it disagrees with the statement in the NPRM that low-friction surfaces such as wet Jennite are too variable to make them unusable for ESC testing. EMA believes that the use of wet Jennite in FMVSS No. 121 for air-brake testing makes wet Jennite suitable for ESC testing. However, we remain concerned about the potential for variability in surface friction on a wet Jennite surface for ESC system testing.

To date, we have found that only the SWD maneuver proposed in the NPRM is suitable for testing yaw stability, and even that test is limited to testing oversteer. As discussed above, we have decided not to conduct compliance tests on vehicles using the SWD because of the substantial time and instrumentation burden associated with the SWD maneuver. We do not believe that this additional time and cost is justified solely to test yaw stability when a majority of the benefits of this final rule are derived from rollover prevention. Moreover, the SWD maneuver would only test oversteer mitigation of yaw instability, whereas understeer is the primary type of yaw instability that we observed in our testing. However, we are continuing to examine possible yaw performance maneuvers, including the SWD maneuver and the lane change maneuver suggested by EMA to test yaw stability control performance in the future.

H. Understeer

As we stated in the NPRM, the agency has no performance test to evaluate how the ESC responds when understeer is induced. The technique used by a stability control system for mitigating wheel lift, excessive oversteer or understeer conditions is to apply unbalanced wheel braking so as to generate moments (torques) to reduce lateral acceleration and to correct excessive oversteer or understeer. However, for a vehicle experiencing excessive understeer, if too much oversteering moment is generated, the vehicle may oversteer and spin out with obvious negative safety consequences. In addition, excessive understeer mitigation acts like an anti-roll stability control where it momentarily increases the lateral acceleration the vehicle can attain. Hence, too much understeer mitigation can create safety problems in the form of vehicle spin out or rollover.

During the testing to develop FMVSS No. 126 for light vehicles, the agency concluded that understanding both what understeer mitigation can and cannot do is complicated, and that there are certain situations where understeer mitigation could potentially produce safety disbenefits if not properly tuned. Therefore, the agency decided to enforce the requirements to meet the understeer criterion included in the ESC definition using a two-part process. First, the requirement to meet definitional criteria ensured that all had the hardware needed to limit vehicle understeer. Second, the agency required manufacturers to make available engineering documentation to NHTSA upon request to show that the system is capable of addressing vehicle understeer.

Based on the agency's experience from the light vehicle ESC rulemaking and the lack of a suitable test to evaluate understeer performance, the agency did not propose a test for understeer to evaluate ESC system performance for truck tractors and large buses. The agency sought comment on the lack of an understeer test.

Advocates stated in its comment that there should be a compliance test for understeer performance. It said the ESC equipment requirement for understeer is not enough to ensure sufficient performance to mitigate understeer conditions.

While we agree with the Advocates goal of having an understeer test, we have not been able to develop a test that safely challenges an ESC system's ability to mitigate understeer. Moreover, we believe the definitional criteria are robust enough to ensure that an ESC system will reduce loss-of-control crashes in both understeer and oversteer conditions.

XI. Test Conditions and Equipment

A. Outriggers

Throughout the agency's research program, truck tractors and buses were equipped with outrigger devices to prevent vehicle rollover. During the program, the agency encountered many instances of wheel lift and outrigger contact with the ground indicating that it was probable that rollover could occur during testing. Over many years of research of ESC systems, it has been proven that outriggers are essential to ensure driver safety and to prevent vehicle and property damage during NHTSA's compliance testing. Although NHTSA conducted some of its testing with ESC systems disabled, thereby increasing the need for outriggers, outriggers are still necessary as a safety

measure during testing of vehicles equipped with an ESC system in case the system fails to activate.

The agency proposed that outriggers be used on all truck tractors and buses tested. We believe that outrigger influence on heavy vehicles is minimal because of the higher vehicle weight and test load. To reduce test variability and increase the repeatability of the test results, the agency proposed to specify a standard outrigger design for the outriggers that will be used for compliance testing. The agency used this same approach in FMVSS No. 126 for compliance testing of light vehicle ESC systems. The agency also made available the detailed design specifications by reference to a design document located in the agency public docket.

For truck tractors, the document detailing the outrigger design to be used in testing has been placed in a public docket.⁵⁹ This document provides detailed construction drawings, specifies materials to be used, and provides installation guidance. For truck tractor combinations, the outriggers are mounted on the trailer. The outriggers are mounted mid-way between the center of the kingpin and the center of the trailer axle (in the fore and aft direction of travel), which is generally near the geometric center of the trailer. They will be centered geometrically from side-to-side and bolted up under the traditional flatbed control trailer. Total weight of the outrigger assembly, excluding the mounting bracket and fasteners required to mount the assembly to the flatbed trailer, is less than 2,500 pounds. The bulk of the mass is for the mounting bracket which is located under the trailer near the vehicle's lateral and longitudinal center of gravity so that its inertial effects are minimized. The width of the outrigger assembly is 269 inches and the contact wheel to ground plane height is adjustable to allow for various degrees of body roll. A typical installation on a flatbed type trailer involves clamping and bolting the outrigger mounting bracket to the main rails of the flatbed.

The NPRM proposed that the outrigger design have a maximum weight of 726 kg (1,600 lb.). However, the agency raised the weight limit of the outriggers used for testing to accommodate the use of older and heavier outrigger designs. This final rule raises the maximum weight of the outriggers to 1,134 kg (2,500 lb.).

For buses, the outrigger installations will not be as straightforward as the

outrigger installations on the control trailers, and the NPRM solicited comments on bus outrigger designs. This is because outriggers cannot be mounted under the flat structure, but instead must extend through the bus. NHTSA used outriggers on the three large buses tested during its research program and will use outriggers for testing buses for compliance with this rule. The agency plans to use the same outrigger arms of the standard outrigger design that it plans to use for truck tractor testing. Therefore, the size, weight, and other design characteristics will be similar.

The location and manner of mounting the outriggers on buses cannot be identical to truck tractors. Nonetheless, there are a limited number of large bus manufacturers, which results in a limited number of unique chassis structural designs. Also, the agency understands that large bus structural designs do not change significantly from year-to-year. We believe that once outrigger mounts have been constructed for several different bus designs, those mountings can be modified and reused during subsequent testing. The agency has, in the document described above, provided additional engineering design drawings and further installation guidelines for installing the standard outrigger assemble to large buses.

B. Automated Steering Machine

The NPRM proposed using an automated steering machine be used for the test maneuvers on the truck tractors and large buses in an effort to achieve highly repeatable and reproducible compliance test results. In the SWD maneuver, the steering must follow an exact sinusoidal pattern over a three-second time period. For the SWD maneuver, each test vehicle is subjected to as many as 22 individual test runs all requiring activation at a specific vehicle speed, each of which will require a different peak steering wheel angle and corresponding steering wheel turning rate.

However, the agency has chosen the J-turn maneuver for the performance test. Although the SWD test requires a fixed steering wheel angle, the J-turn test is a path-following maneuver. This means a steering controller will not be required for the J-turn test because the driver provides the steering wheel input in order to keep the vehicle within the lane during the test maneuver.

Because the driver must attempt to keep the vehicle within the lane width, he has some discretion on the steering wheel angle and the position of the vehicle within the lane as the vehicle crosses the start gate. Depending on the

experience and technique of the driver, the vehicle may have a steering wheel angle that is varied by the time the vehicle crosses the start gate. This variance is tolerable because we do not expect that it will be difficult for a professional test driver to maintain the vehicle lane. Nevertheless, to ensure that variability in testing does not affect vehicle compliance, the performance requirements need only be satisfied during two out of four runs of a test series (or six out of eight runs of the final series).

C. Anti-Jackknife System

The agency proposed using an anti-jackknife system when testing truck tractors. An anti-jackknife system prevents the trailer from striking the tractor during testing in the event that a jackknife event occurs during testing. This would prevent damage to the tractor that may occur during testing. We do not believe that the use of an anti-jackknife system will affect test results, nor have we observed any damage to test vehicles, including vehicle finishes, caused by anti-jackknife cables.

The agency proposed using cables to limit the angle of articulation between the truck tractor and trailer, and set a minimum angle of 45 degrees because setting the cables too tight could artificially help the ESC system maintain control during testing. However, if the angle of articulation is set too low the turning radius of the combination vehicle decreases to a point where maneuverability of the vehicle becomes an issue. A vehicle with too low of a turning radius would not be able to drive through the J-turn test course. Therefore, we must set a minimum articulation angle for the jackknife system that ensures safety during testing, but is not too low such that it would affect test results. However, our testing has shown that 45 degrees is too high of an angle for a 4x2 truck tractor, because the trailer could still contact the truck tractor. Therefore agency is specifying 30 degrees as the minimum articulation angle in this final rule, which is sufficient to provide safety during the testing of all truck tractors.

D. Control Trailer

The agency proposed using a control trailer to evaluate the performance of a truck tractor in the loaded condition. In FMVSS No. 121, the agency specifies the use of an unbraked control trailer for compliance testing purposes. An unbraked control trailer minimizes the effect of the trailer's brakes when testing the braking performance of a tractor in

⁵⁹ Docket No. NHTSA-2010-0034-0010.

its loaded condition. Nevertheless, in the NPRM, we identified potential variability in the control trailer that affected the repeatability of SWD testing and asked for comments on how the control trailer may be specified to prevent variability.⁶⁰

Navistar and EMA commented on a specific truck tractor that satisfied the proposed SWD criteria with the ESC system disabled. We believe this is "Vehicle J" that was identified in the NPRM. NHTSA conducted its own testing on "Vehicle J" using a different control trailer. In contrast to EMA's test results, NHTSA's testing showed that Vehicle J became laterally unstable with the ESC system disabled.

Volvo, EMA, Advocates, and Bendix commented on the control trailer specifications. Volvo asserted that further specifications need to be made for the control trailer because trailer configuration greatly affects compliance of the SWD test. EMA stated that the control trailer's track width, deck height, ballast, suspension, tires and torsional stiffness affect the SWD test results, and small variations in the control trailer influence the SWD testing. EMA further indicated that would not be practical to build trailers with stricter design specifications in order to perform SWD tests and obtain consistent results. Conversely, Advocates and Bendix recommended that the agency add new specifications and tighten up existing requirements in order to reduce the variability in testing. Advocates recommended specifying track width, trailer CG height, and load CG height in the standard because it would minimize variation in testing.

Other than soliciting comments in the NPRM, the agency did not investigate whether variations in the control trailer significantly affect the results of the SWD maneuver. However, the agency has not further modified the specifications of the control trailer. Rather, we believe that, by using the J-turn maneuver rather than the SWD maneuver, any potential test variability caused by different control trailers is ameliorated. The agency's research shows that, because the performance metric is vehicle speed rather than lateral acceleration ratio, the effect that the control trailer has on the lateral

acceleration is negligible. The sole consideration in the performance criteria in this final rule is speed reduction, which has not been observed to be affected by variations in the control trailer.

We note that Volvo, EMA, and Bendix recommended the adoption of the J-turn test, which is one of the alternative tests discussed in the NPRM. None of the commenters supporting adoption of the J-turn test raised issues regarding variability in the control trailer with the J-turn maneuver. Rather, their comments regarding control trailer variability were limited to the SWD test maneuver.

Further, the agency conducted J-turn testing using two different control trailers. We did not find any relevant differences in the ESC system performance of the truck tractors when connected to different control trailers. We believe, based on our testing and the lack of comments related to the control trailer in the J-turn maneuver, that the potential for variability identified in the NPRM related to the control trailer was limited to the SWD maneuver. We conclude that the factors identified in the NPRM will have no effect on the performance of vehicles using the J-turn maneuver.

Volvo also commented that the control trailer specified in FMVSS No. 121 will not work with four or more axle tractors such as 8x6 truck tractor's because the trailer's fifth wheel position causes interference between the tractor frame and trailer frame. NHTSA has considered this comment and believes that there is merit in Volvo's assertion. A control trailer at the length specified in the NPRM of 6550 ± 150 mm (258 \pm 6 in) may be too short to test vehicles with four or more axles. In this final rule, we are changing the specified length of the control trailer to allow for testing with a longer trailer. We are specifying that truck tractors will be tested with a control trailer that is between 6400 mm and 7010 mm (252 in and 276 in), inclusive. However, for truck tractors with four or more axles, at the manufacturer's option, NHTSA will test with a control trailer with a length up to 13,208 mm (520 in). We do not believe that using a control trailer longer than that specified in the proposal would cause variability in testing.

E. Sensors

The vehicle speed is measured with a non-contact GPS-based speed sensor. Accurate speed data is required to ensure that the SWD maneuver is executed at the required 72.4 ± 1.6 km/h (45.0 \pm 1.0 mph) test speed. Sensor

outputs are available to allow the driver to monitor vehicle speed.

F. Ambient Conditions

The ambient temperature range specified in other FMVSSs for outdoor brake performance testing is 0 °C to 38 °C (32 °F to 100 °F). However, when the agency proposed a range of 0 °C to 40 °C (32 °F to 104 °F) for FMVSS No. 126, the issue of tire performance at near freezing temperatures was raised. The agency understood that near freezing temperatures could impact the variability of compliance test results. As a result, the agency increased the lower bound of the temperature range to 7 °C (45 °F) to minimize test variability at lower ambient temperatures. For the same reasons, the NPRM proposed an ambient temperature range of 7 °C to 40 °C (45 °F to 104 °F) for testing.

In their comments, Meritor WABCO, EMA, and Bendix recommended changes to the minimum ambient temperature allowed for testing. The three commenters requested that the minimum temperature for performance tests to be reduced. Meritor WABCO recommended a minimum temperature of 2 °C (35 °F). Both EMA and Bendix recommended a minimum temperature of 0 °C (32 °F). EMA asserted that the minimum temperature of 7 °C (45 °F) proposed in the NPRM reduces the amount of time available to test vehicles during the year. We agree that a minimum test temperature of 7 °C (45 °F) restricts the agency's ability to test for compliance in certain areas of the United States, including NHTSA's Vehicle Research and Test Center in Ohio. Thus, we are lowering the minimum testing temperature to 2 °C (35 °F). We believe this change will have a negligible effect on the outcome of performance testing.

EMA further recommended that the upper limit be decreased from 40 °C (104 °F) to 38 °C (100 °F) to match the FMVSS No. 121 ambient temperature specifications. We are not adopting this suggestion to match the temperature specifications in FMVSS No. 121. EMA gave no reason other than consistency with FMVSS No. 121 for adopting this change. Allowing for a larger temperature range for testing ESC systems does not have any effect on the agency's ability to conduct consecutive FMVSS No. 121 and FMVSS No. 136 tests because the FMVSS No. 121 testing is conducted at an ambient temperature of not greater than 38 °C (100 °F). Thus, compliance testing will be conducted at any temperature between 2 °C (35 °F) and 40 °C (104 °F). The agency proposed a maximum wind speed for conducting the compliance testing of no greater

⁶⁰ There were three specifications, not set forth in control trailer specifications in FMVSS No. 121, that the agency identified that might affect SWD test performance and prevent repeatable, consistent test results using different control trailers. First, the track width of the control trailer is not specified. Second, the center of gravity of the control trailer is not specified. Third, the center of gravity of the load in FMVSS No. 121 testing is only specified to be less than 24 inches above the top of the tractor's fifth wheel.

than 5 m/s (11 mph). This is the same value specified for testing multi-purpose passenger vehicles (MPVs), buses, and trucks under FMVSS No. 126. This is also the same value used for compliance testing for FMVSS No. 135, *Light Vehicle Brake Systems*.

As for other ambient conditions, Bendix recommended that the maximum wind speed be raised from 11 mph (5 m/s) to 22 mph (10 m/s). Bendix did not specify any rationale for wanting the increase in the allowable wind speed. The agency sees no reason to increase the wind speed at this time.

G. Road Test Surface

The NPRM proposed that the SWD maneuver be executed on a high friction surface with a peak friction coefficient (PFC) of 0.9, which is typical of a dry asphalt surface or a dry concrete surface. As in other standards where the PFC is specified, we proposed that the PFC be measured using an ASTM E1136 standard reference test tire in accordance with ASTM Method E1337-90, at a speed of 64.4 km/h (40 mph), without water delivery. We proposed incorporating these ASTM provisions into the standard.

Although we have changed the performance test maneuver, we have not changed the specifications for the road test surface. The J-turn maneuver is conducted on a high friction surface with a PFC of 0.9. Thus, we are incorporating the relevant ASTM provisions into this standard.

Bendix recommended adding a restriction that there be no ice or snow buildup on the test track surface. NHTSA has not adopted this suggested change. We believe that the surface PFC specification of 0.9 already ensures that the test track will be free of snow and ice.

H. Vehicle Test Weight

The agency proposed that truck tractors be tested with the combined weight of the truck tractor and control trailer be equal to 80 percent of the tractor's GVWR. To achieve this load condition, we proposed that the tractor be loaded with the fuel tanks filled to at least 75 percent capacity, test driver, test instrumentation, and ballasted control trailer with outriggers. The center of gravity of all ballast on the control trailer was proposed to be located directly above the kingpin. When possible, load distribution on non-steer axles will be in proportion to the tractor's respective axle GAWRs. Load distribution will be adjusted by altering fifth wheel position, if adjustable. In the case where the tractor's fifth wheel cannot be adjusted

so as to avoid exceeding a GAWR, ballast will be reduced so that axle load equals specified GAWR, maintaining load proportioning as close as possible to specified proportioning.

In its comments, EMA recommended changing the loading requirements from 80 percent of the truck tractor's GVWR to 100 percent of the truck tractor's GVWR requirements. EMA wanted this loading condition because it is used in FMVSS No. 121 testing, and it would eliminate the burden of changing the vehicle's load when going from FMVSS No. 121 testing to FMVSS No. 136 testing.

In light of the change to the J-turn maneuver, we have determined that the vehicle should be tested at its GVWR rather than 80 percent of the truck tractor's GVWR. The agency proposed SWD testing at 80 percent of GVWR because it was determined that such a weight would enable the agency to evaluate both roll and yaw stability with a single maneuver. The J-turn maneuver is designed to evaluate only roll stability, and testing the vehicle at its GVWR is the most severe configuration for the maneuver. Thus, the agency can use the same loading condition that it uses for FMVSS No. 121 testing.

EMA also suggested removing the proposed test condition that the fuel tank be 75 percent full. EMA reasoned that high fuel volume is dangerous for testing. Also, EMA observed that a 75% fuel filling condition is not included in FMVSS No. 121.

Regarding the fuel tank filling, NHTSA specifies the 75 percent fuel level in FMVSS No. 126 for testing light vehicles. The goal of the fuel level specification in FMVSS No. 126 was to ensure consistent vehicle test weights for the performance tests. With the adoption of the J-turn maneuver, NHTSA did not find any evidence of varying fuel levels affecting the results of the ESC performance tests. Therefore, NHTSA agrees with EMA and will remove the specification of a minimum fuel tank level.

The agency proposed that liftable axles be in the down position for testing. This was because we proposed to conduct our performance test in a loaded condition. Although the NPRM proposed to load the truck tractor to 80 percent of its GVWR, we believed that a truck tractor would operate with liftable axles in the down position. In the final rule, we are testing vehicles at GVWR. Consequently, we will test vehicles equipped with liftable axles in the down position. This is consistent with the test conditions for testing fully loaded air braked vehicles under FMVSS No. 121.

For testing buses, the agency proposed loading the vehicle to a simulated multi-passenger configuration. For this configuration the bus would be loaded with the fuel tanks filled to at least 75 percent capacity, test driver, test instrumentation, outriggers and simulated occupants in each of the vehicle's designated seating positions. The simulated occupant loads would be obtained by securing 68 kilograms (150 pounds) of ballast in each of the test vehicle's designated seating positions without exceeding the vehicle's GVWR and GAWR. The 68 kilogram (150 pound) occupant load was chosen because that is the occupant weight specified for use by the agency for evaluating a vehicle's load carrying capability under FMVSS Nos. 110 and 120. During loading, if any rating is exceeded the ballast load would be reduced until the respective rating or ratings are no longer exceeded.

In the final rule, we have removed the specification that the ballast consists of water dummies. We do not believe that it is necessary to specify the type of ballast in the test procedure. We note that, for truck tractors, the type of ballast that is loaded on the control trailer is not specified. We do not believe, especially in light of the change to the J-turn test, that the type of ballast used (whether it is water, sand, or some other ballast) would have an effect on the ESC system's ability to lower the vehicle's forward speed.

Unlike in the NPRM, this final rule specifies that buses are tested at its GVWR. This is the most severe loading condition for testing buses using the J-turn test maneuver. The NPRM specified that buses would be tested with a simulated full passenger load, without any cargo other than test equipment. We have increased the testing load, which makes the load condition consistent with the loading NHTSA uses to test FMVSS No. 121 compliance. We have added specification to the loading procedure to allow for the vehicle to be loaded to GVWR. First, simulated passengers are loaded. Next, ballast is added to the lowest baggage compartment. If the bus does not have a baggage compartment or additional ballast is needed because the baggage compartment is loaded to capacity, ballast is added to the floor of the passenger compartment to load the bus to its GVWR. During loading, if any axle rating is exceeded, the ballast is reduced in the reverse order it is loaded until the GVWR or GAWR of any axle is no longer exceeded.

I. Tires

We proposed testing the vehicles with the tires installed on the vehicle at time of initial vehicle sale. The agency's compliance test programs generally evaluate new vehicles with new tires. Therefore, we proposed that a new test vehicle have less than 500 miles on the odometer when received for testing.

For testing, the agency proposed that tires be inflated to the vehicle manufacturer's recommended cold tire inflation pressure(s) specified on the vehicle's certification label or the tire inflation pressure label. We will not change the vehicle's tires during testing unless test vehicle tires are damaged before or during testing. We did not propose using inner tubes for testing because we have not seen any tire debanding in any test.

Before executing any test maneuvers, the agency proposed to condition tires to wear away mold sheen and achieve operating temperatures. To begin the conditioning the test vehicle would be driven around a circle 46 meters (150 feet) in radius at a speed that produces a lateral acceleration of approximately 0.1g for two clockwise laps followed by two counterclockwise laps.

EMA asserted that there should be no requirement for testing using the tires installed on the vehicle at the time of initial sale. According to EMA, sometimes a test vehicle is used for certifying compliance, but sometimes a vehicle that is later sold to a customer is tested. Further, EMA notes that heavy truck manufacturers often offer hundreds of different tire options for their customers. EMA notes that different tires would change the road adhesion and cornering stiffness, potentially affecting test results.

Finally, EMA recommended using language from FMVSS No. 121 for the tire inflation procedure specified by manufacturer for the vehicle's GVWR, instead of the procedure proposed in the NPRM, which is to use the vehicle's certification label or tire inflation pressure label. EMA reasoned that the actual tires installed on the vehicle may differ from the specifications given on the label.

First, inasmuch as EMA is referring to the tires used for certifying compliance, we note that our regulations do not specify how manufacturers certify compliance. We recognize that some manufacturers do wish to base their certification of compliance on a vehicle's performance in NHTSA's test maneuvers. However, there is no obligation for manufacturer's to conduct NHTSA's compliance test for any vehicle, much less for every possible

tire combination. For instance, manufacturers currently certify that their vehicles meet the minimum stopping distance and ABS requirements of FMVSS No. 121. They must satisfy those requirements for any vehicle-tire combination that is sold. That is, manufacturers have an obligation to certify compliance with all applicable standards in whatever configuration that tires are delivered to customers. We expect that manufacturers design their ESC systems to account for any potential differences in tires that might be installed on the vehicle at the time of initial sale.

However, with respect to the tire inflation pressure at which testing will be conducted, we agree with EMA that we should not use the inflation pressure specified on the vehicle's certification or tire information labels. As EMA observes, a heavy truck may be sold with many different tire combinations. However, nothing requires that all of those combinations be listed on the certification or tire information label.⁶¹ However, multiple combinations may be listed on the label. Thus, we are removing from the regulatory text the reference to the vehicle's certification or tire information label and merely specifying that the tires' inflation pressure will be the inflation pressure specified for the GVWR of the vehicle.

Regarding tire conditioning, Bendix requested clarification of whether the presence of a tire conditioning procedure means that the vehicle must be equipped with new tires. Bendix also recommended that the agency remove this section about the removal of mold sheen because by performing the brake conditioning test procedure, the same result is likely to be achieved.

To clarify, the agency is not specifying that new tires must be installed prior to the ESC testing. However, in the event the vehicle has not been driven prior to testing (for example, a FMVSS No. 121 compliance test has not been performed), we do not believe that the brake burnishing procedure is sufficient to wear away any mold sheen on the tire prior to ESC testing. Therefore, the requirement to perform four laps is necessary for the consistency and repeatability of the ESC tests. We do not believe that this procedure is especially burdensome, even if the mold sheen was removed during prior testing.

⁶¹ In fact, S5.1.2 of FMVSS No. 120, the standard that provides for tire information labeling on vehicles over 10,000 pounds GVWR, expressly contemplates that a vehicle may be sold with a tire size designation that is not listed on the tire information label.

J. Mass Estimation Drive Cycle

Both truck tractors and large buses experience large variations in payload mass, which affects a vehicle's roll and yaw stability thresholds. To adjust the activation thresholds for these variations, stability control systems estimate the mass of the vehicle after ignition cycles, periods of static idling, and other driving scenarios. To estimate the mass, these systems require a period of initial driving.

The agency proposed including a mass estimation drive cycle as a part of pre-test conditioning. To complete this drive cycle the test vehicle is accelerated to a speed of 64 km/h (40 mph), and then, by applying the vehicle brakes, decelerated at 0.3g to 0.4g to a stop.

Meritor WABCO requested that the mass estimation drive cycle procedure be made manufacturer-specific. That is, Meritor WABCO requested that the procedure be changed to specify that NHTSA would contact the ESC system supplier for a mass estimation procedure.

Although we specified a mass estimation procedure in the NPRM, that procedure is based on current ESC system designs. We recognize that system designs could change or new suppliers could enter the market with different designs that estimate vehicle mass differently. Thus, we accept Meritor WABCO's request that NHTSA not specify a mass estimation cycle.

However, we do not agree with Meritor WABCO's suggestion that NHTSA contact the ESC system supplier for the mass estimation cycle. It is the vehicle's manufacturer that is ultimately responsible for certifying compliance with the FMVSSs. Thus, we believe it is the vehicle's manufacturer, not the ESC system supplier, who should be responsible for supplying NHTSA with the mass estimation cycle procedure. Thus, we expect that the vehicle manufacturer will be able to provide the mass estimation cycle procedure to NHTSA upon request in advance of any compliance testing.

K. Brake Conditioning

Heavy vehicle brake performance is affected by the original conditioning and temperatures of the brakes. We believe that incompletely burnished brakes and excessive brake temperatures can have an effect on ESC system test results, particularly in the rollover performance testing, because a hard brake application may be needed for the foundation brakes to reduce speed to prevent rollover.

The agency proposed that the burnish procedure specified in S6.1.8 of FMVSS

No. 121 be conducted prior to ESC system testing. The burnish procedure is performed by conducting 500 brake snubs⁶² between 40 mph and 20 mph at a deceleration of 10 fps². If the vehicle has already completed testing to FMVSS No. 121, the agency did not propose to repeat the full burnishing procedure. Instead, the brakes are conditioned for ESC system testing with 40 snubs. The agency proposed that the brake temperatures be in the range of 65 °C to 204 °C (150 °F to 400 °F) at the beginning of each test maneuver. We also proposed that the brake temperature be measured by plug-type thermocouples installed on all brakes and that the hottest brake be used for determining whether cool-down periods required.

We received no comment on the burnishing procedure and are adopting the proposed procedure in this final rule, with two exceptions. First, in the NPRM, we proposed to repeat the FMVSS No. 121 burnish procedure at the manufacturer's option. However, in this final rule, we have removed the option. Rather, we are merely specifying that a burnish procedure similar to the one in FMVSS No. 121 be completed prior to testing. Furthermore, rather than referencing FMVSS No. 121, we have included the entire burnishing in FMVSS No. 136 to avoid the need to cross-reference between Standards. Second, we have altered the metric conversion of 150 °F from 65 °C to 66 °C to be more accurate.

In the NPRM, the agency suggested, as a general rule, that a new test vehicle have less than 500 miles on the odometer when received for testing. EMA commented on this suggestion, requesting that there be no odometer requirements on a test vehicle. EMA believes that this requirement may require transporting the test vehicle by hauling it on a trailer to the test site if the test site is located far away from the place of manufacture. NHTSA agrees with EMA that it is not feasible to require that a test vehicle have less than 500 miles on its odometer prior to testing. This is particularly true in light of the burnishing procedure, which could itself require 500 miles of driving. Thus, the final rule does not have a mileage requirement for test vehicles.

L. Compliance Options

Both Bendix and Volvo requested clarification of the proposed regulatory text specifying compliance options. That provision would require that a manufacturer identify which

compliance option was selected for compliance test purposes and provide that information to the agency upon request. Bendix and Volvo raised this issue because they did not believe that any of the proposed requirements offered manufacturers any compliance options to choose from.

In this final rule, we are giving manufacturers a compliance option with respect to the length of the control trailer used for testing truck tractors. As discussed in section XI.D, manufacturers of truck tractors with four or more axles may, at the manufacturer's option, have testing conducted with a longer control trailer. Thus, we are retaining the language requiring manufacturers to specify compliance options prior to agency testing.

M. Data Collection

In the NPRM, we proposed that the collection of data from the vehicle, such as engine torque output and driver-requested torque, come from the SAE J1939 communication data link. Bendix requested that NHTSA change the collection procedure to specify that the data come from the vehicle controller area network (CAN) bus, which is a more generic reference instead of specifically requiring a SAE J1939 data link. The CAN bus is what allows a vehicle's electronic control units and other devices to communicate with each other. SAE J1939 is a recommended practice to standardize vehicle communications. Bendix believes that citing SAE J1939 specifically may have the effect of limiting vehicle design in the future.

We agree with Bendix that the reference to SAE J1939 should be changed to a more generic reference. This will allow future technological advances regarding in-vehicle communications, including the adoption of new industry recommended practices. Accordingly, we are specifying that data be collected from the vehicle's communication network or CAN bus.

Bendix also commented upon the filtering of engine torque data received from an analog signal. Bendix noted that data from an SAE J1939 compliant communication network is digital data. However, because we are removing the references to SAE J1939 in response to Bendix's comment, we are not changing the procedure for filtering analog data signals because recognize that some communication systems could use analog signals.

XII. ESC Disablement

A. Summary of Comments

In the NPRM, the agency considered allowing a control for the ESC to be disabled by the driver. Because, heavy vehicles currently equipped with ESC systems do not include on/off controls for ESC that allow a driver to deactivate or adjust the ESC system, the agency did not propose allowing an on/off switch for ESC systems. The agency sought public comment on the need to allow an on/off switch, and asked that commenters specifically address why manufacturers might need such a switch and how manufacturers would implement a switch in light of the ABS requirements.

Temsa and Advocates opposed allowing the disablement of the ESC system. They stated that the ESC system should not be allowed to be deactivated by a switch because the driver may inadvertently forget to reactivate the system.

In contrast, Daimler, Volvo, Meritor WABCO, HDBMC, Associated Logging, EMA, and Bendix recommended that we allow the ESC systems to be disabled. The commenters asserted that the ESC system may need to be disabled in certain conditions such as slippery roads in snow and mud, off-road operation, and when using snow chains on the tires.

Daimler stated in its comment that the current ESC and traction control systems are interlinked, and the disablement of traction control will disable ESC systems. Daimler asserted that disabling traction control may be necessary in conditions such as starting from rest on sloped ground, driving on slippery roads, and using snow chains. HDBMC also asserted that ESC disablement is needed for gaining traction in snow and mud and to provide optimum performance when using snow chains. Meritor WABCO similarly referred to the need for the ability to change the control scheme of the ESC system to allow for deep snow and mud.

In contrast, Bendix stated that its ESC system is tuned for both on-road and mild off-road conditions. However, Bendix suggested that different vehicle tuning may be necessary for severe off-road conditions.

Regarding the absence of ESC disablement on current truck tractors, EMA also suggested that some small volume tractors are more likely to need to have an ESC disablement function for off-road operation and claimed that at least one manufacturer had equipped a vehicle with such a switch to temporarily disable ESC. Further, EMA

⁶² A snub is a brake application where the vehicle is not braked to a stop but to a lower speed.

suggested that ESC disablement functions are not prevalent because large fleet customers have been purchasing ESC systems.

HDMBC recommended that vehicles that have a switch to disable ESC systems be equipped with a lamp indicating that the ESC system is off similar to the ESC Off telltale in FMVSS No. 126. In its comment, Meritor WABCO suggested that the ESC malfunction lamp should be constantly illuminated if ESC is deactivated.

Meritor WABCO, HDBMC, Bendix, EMA, and Volvo also suggested that vehicles be allowed to automatically disable their ESC systems under certain conditions. Meritor WABCO claimed that all-wheel drive is an example of when ESC should automatically be disabled. HDBMC, EMA, and Bendix said there should be the ability to automatically disable ESC system for certain applications such as all-wheel drive and truck tractors with multiple steering axles. Volvo asserted that, while it has no plans to offer an ESC on/off switch, it recognizes that some customers may want to convert a truck tractor to a truck. Volvo believes that it may be preferable to allow an ESC off switch rather than having converters disabling the ESC system during a conversion.

In its comment, Bendix also recommended changing the minimum speed at which an ESC system is required to operate from 20 km/h (12.4 mph) to 25 km/h (15.5 mph) to accommodate the wide variation of tires sizes, tone ring tooth counts, and production tolerances. Bendix said the higher speed threshold is necessary based on wheel-speed sensor signal strength and antilock braking system functionality.

B. Response to Comments

This final rule does not allow a function to disable an ESC system at speeds where ESC systems are required to operate.

First, we address the integration between traction control systems and ESC systems. Both systems use the vehicle's brake control system to accomplish different goals. Traction control reduces engine power and applies braking to a spinning drive wheel in order to transfer torque to the other drive wheel on the axle. This function is used to allow a vehicle to move forward in certain conditions where wheel spin may otherwise prevent forward movement. In contrast, ESC systems are designed to maintain roll and yaw stability rather than facilitate forward movement.

While we agree that traction control may need to be disabled in slippery conditions such as snow or mud or other off-road conditions, the commenters do not explain why ESC functions must be disabled in those circumstances. Although ESC may share components with traction control, the requirements for ESC are independent of those for traction control. As explained above, ESC mitigates roll and yaw instability of the vehicle by reducing lateral acceleration and maintaining directional control, respectively. Although traction control provides mobility in starting on slippery surfaces, it does not improve lateral stability beyond what ESC provides through braking and reduction in engine torque. Likewise, traction control does not improve yaw stability by providing directional control. Traction control provides no further assistance when lateral or yaw instability is detected.

Furthermore, we are not requiring the ESC system to activate at extremely low vehicle speeds, which is when the vehicle would be starting from rest. This concern may be remedied by optimizing traction control, and a manufacturer has the option to activate traction control or allow deactivation of traction control at any vehicle speed. If the disablement of traction control also disables the ESC system, then the disablement function is prohibited from disabling ESC functionality at speeds above the minimum speed ESC systems are required to operate. This means that the ESC system must automatically reactivate once the vehicle reaches the minimum speed at which the ESC system is required to operate.

Some of the commenters asserted the need for ESC disablement on vehicles with all-wheel-drive or multi-steering axles. In FMVSS No. 126, we allow the ESC to be disabled on light vehicles for certain four-wheel drive modes. None of the commenters asserted any similarities that truck tractors and large buses have with light vehicles regarding enhanced traction modes such as four-wheel drive low. Therefore, we do not believe any exceptions should be made for all-wheel drive vehicles because there was insufficient data submitted to justify an exception for heavy vehicles.

With regard to vehicles with multiple steering axles, we received no specific information about the vehicle operation and why vehicle with multiple steer axles should be allowed to have their ESC systems disabled either by switch or automatically. Without any information, the agency cannot justify an exception.

Regarding off-road use, Bendix and Meritor WABCO discussed ESC tuning

differences between on-road and off-road uses in their comments. However, neither supplier provided detailed reasons for why ESC system disablement would be beneficial when used in off-road circumstances. In contrast, Bendix said the off-road situations need ESC disablement at low speeds and different ESC tuning is expected.

Regarding Volvo's assertion that an ESC disablement switch may be preferable to converters disabling ESC during a conversion of a vehicle from a truck tractor to a truck, we do not believe that this limited circumstance justifies an ESC disablement switch. Volvo was not specific on the nature of the conversion it was referring to and why the ESC system would need to be disabled.

Bendix suggested that a switch could be allowed to disable an ESC system below a maximum speed of 25 mph. Bendix believes that this would allow for maneuverability in slippery conditions such as mud or snow. Relatedly, Bendix suggested that the minimum ESC operational speed be raised from the proposed 20 km/h (12.4 mph) to 25 km/h (15.5 mph).

After considering the comments, we are not raising the minimum speed at which an ESC system must operate. We proposed the minimum operating speed of 20 km/h (12.4 mph) based on information we obtained from vehicle manufacturers and ESC system suppliers, including Bendix. As we stated in the NPRM, the low speed thresholds of ESC systems were 10 km/h (6.2 mph) for yaw stability control and 20 km/h (12.4 mph) for roll stability control. We believed that setting a single low speed threshold was preferable because yaw and roll stability functions are intertwined. Bendix's recommendation for increasing the minimum speed criteria presents new information to the agency. We also observe that the proposed minimum speed threshold is the same as UN ECE Regulation 13. Instead of raising the minimum activation speed, at which an ESC system must operate, manufacturers may wish to disable the traction control system, where disabling traction control does not cause the ESC system to be in a malfunction state, without compromising the effectiveness of an ESC system. However, once a vehicle reaches a forward speed of 20 km/h (12.4 mph), the ESC system is required to be functional to prevent roll and yaw instability. We believe that changes to the traction control system operation will mitigate the concerns raised by the commenters regarding

system operability in slippery or off-road conditions.

Finally, we also sought and received comments on how a manufacturer would implement an ESC disablement switch. Because we have decided not to allow ESC disablement above the minimum speed at which ESC is required to operate, we need not address these comments in this final rule.

XIII. ESC Malfunction Detection, Telltale, and Activation Indicator

A. ESC Malfunction Detection

The NPRM proposed that that vehicles would be required to be equipped with an indicator lamp, mounted in front of and in clear view of the driver, which would be activated whenever there is a malfunction that affects the generation or transmission of control or response signals in the vehicle's ESC system. Heavy vehicles presently equipped with ESC generally do not have a dedicated ESC malfunction lamp. Instead, they share that function with the mandatory ABS malfunction indicator lamp or the traction control activation lamp. The agency proposed requiring a separate ESC malfunction lamp because it would alert the driver to the malfunction condition of the ESC and would help to ensure that the malfunction is corrected at the earliest opportunity.

The ESC malfunction telltale would be required to remain illuminated continuously as long as the malfunction exists whenever the ignition locking

system is in the "On" ("Run") position. The proposal required that ESC malfunction telltale extinguish after the malfunction has been corrected.

The NPRM also included a test that would allow the engine to be running and the vehicle to be in motion as part of the diagnostic evaluation. The agency proposed simulating several possible malfunctions to ensure the system and corresponding malfunction telltale provides the required warning to the vehicle operator, such as by disconnecting the power source to an ESC system component or disconnecting an electrical connection to or between ESC system components. After a malfunction has been simulated and identified by the system, the system would be restored to normal operation. The engine is started and the malfunction telltale is checked to ensure it has cleared.

We received no adverse comments on the requirement that an ESC system malfunction be displayed to the driver, nor did we receive comments on the test procedure for ensuring malfunction detection. Therefore, we are adopting these requirements as proposed in the NPRM.

B. ESC Malfunction Telltale

The NPRM proposed requiring that an ESC malfunction lamp provide a warning to the driver when one or more malfunctions that affect the generation of control or response signals in the vehicle's electronic stability control

system is detected. Specifically, the ESC malfunction telltale would be required to be mounted in the driver's compartment in front of and in clear view of the driver and be identified by the symbol shown for "ESC Malfunction Telltale" or the specified words or abbreviations listed in Table 1 of FMVSS No. 101, *Controls and displays*. FMVSS No. 101 includes a requirement for the telltale symbol, or abbreviation, and the color required for the indicator lamp to show a malfunction in the ESC system.

The agency proposed that the symbol and color used to identify ESC malfunction should be standardized with the symbol used on light vehicles. The symbol established in FMVSS No. 126 is the International Organization for Standardization (ISO) ESC symbol, designated J.14 in ISO Standard 2575. The symbol shows the rear of a vehicle trailed by a pair of "S" shaped skid marks, shown below in Figure 3. The malfunction telltale is displayed in the color yellow, which communicates the malfunction of a system that does not require immediate correction. The agency found that the ISO J.14 symbol and close variations were the symbols used by the greatest number of light vehicle manufacturers that used an ESC symbol before the requirement was established. Furthermore, FMVSS No. 126 allows, as an option, the use of the text "ESC" in place of the telltale symbol. This same option was proposed in the NPRM for heavy vehicles.



Figure 3: ESC Malfunction Telltale Symbol in FMVSS No. 101

In addition to the ESC malfunction telltale being used to warn the driver of a malfunction in the ESC, the telltale is also used as a check of lamp function during vehicle start-up. We believe that the ESC malfunction telltale should be activated as a check of lamp function either when the ignition locking system is turned to the "On" ("Run") position whether or not the engine is running. This function provides drivers with the information needed to ensure that the ESC system is operational before the vehicle is driven. It also provides Federal and State inspectors with the

means to determine the operational status of the ESC system during a roadside safety inspection.

In the regulatory text of the NPRM, we proposed requiring that the ESC malfunction telltale illuminate only when a malfunction exists. However, we also required that the telltale illuminate as a check of lamp function. These two requirements may be read as inconsistent with each other. We have added language to this final rule to clarify that the check of lamp function is an exception to the requirement that

the telltale only illuminate in the event of a system malfunction.

Meritor WABCO commented on the operation of the light and said that the ESC malfunction lamp should be continuously illuminated if there is a malfunction in the ESC system. We agree with Meritor WABCO. The requirement that the indicator lamp be continuously illuminated if there is a malfunction in the ESC system was included in the proposed standard and is included in this final rule.

Bendix recommended a change that would allow a malfunction lamp to

remain illuminated until either the system self-resets with an ignition cycle or a recommended diagnostic tool can be used to clear faults. Bendix states that in some cases of faults, their systems are not guaranteed to self-reset upon correction.

We are not adopting Bendix's suggested change to allow that the telltale remain illuminated until a diagnostic tool can be used to reset a fault. If a diagnostic tool can be used to remedy a fault without an ignition cycle, there is nothing prohibiting the malfunction telltale from being extinguished. However, we cannot include in the malfunction lamp requirements the ability for the telltale to remain illuminated, even after a malfunction may have been corrected, until a diagnostic tool can be used. The purpose of the requirement that the malfunction lamp extinguish upon an ignition cycle after correction of the problem is that the system should be

able to detect both a malfunction and a correction without the use of external tools. The malfunction lamp should not extinguish until the fault is actually corrected.

We also received comments regarding the ESC system malfunction telltale itself. Temsa commented that there should be the option to use the text of "ESC" on the malfunction indicator. Temsa reasoned that this would be more user-friendly. This option was included in the NPRM and is included in this final rule.

We received several comments on the depiction of the vehicle in the telltale. Daimler referred to ECE Regulation 13, which citing ISO 2575, allows the vehicle shape to be changed to better represent the true exterior shape of a given vehicle. Daimler also stated that it uses a heavy truck or bus symbol on its European systems and it may result in an increased cost if the symbol depicting a passenger car was required in the U.S. Daimler asserted that the

discretion to choose the vehicle outline should be left to the manufacturer. Similarly ATA and Volvo recommended that the telltale should depict the rear of a truck tractor above the "S" shaped skid marks.

In response, we acknowledge desire of the industry to most accurately depict the type of vehicle being displayed on the ESC system malfunction telltale. We believe that requiring a symbol depicting the rear end of a trailer or bus above the "S" skid marks will satisfy the concerns of the manufacturers without causing any confusion regarding the identification of the telltale. We are including in the allowable telltales for this Standard trailer and bus symbols drawn from ISO 2575. We have chosen to depict the rear outline of a trailer rather than a truck because it is a better depiction of the usual rear view of a combination vehicle. The symbols are depicted in Figure 4 below.

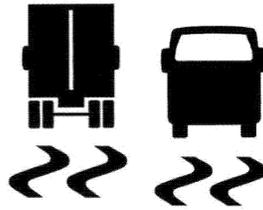


Figure 4: ESC Malfunction Telltale Symbols Depicting a Truck Tractor and a Bus

C. Combining ESC Malfunction Telltale With Related Systems

In its comment, CVSA supported NHTSA's proposal to require a separate ESC malfunction telltale, without which the end user would not know if the system is operating. Further, CVSA reasoned that an anticipated Federal Motor Carrier Safety Administration (FMCSA) rule would require commercial vehicles with ESC systems be free of any indicated ESC faults.

Volvo supported combining the ESC malfunction indicator with a malfunction indicator for a traction control system. Volvo reasoned that a malfunction in the traction control system would be likely to also constitute a malfunction in the ESC system. In a simplified fault representation system submitted by Volvo, 17 out of 18 faults in a traction control system were also ESC system faults that would presumably trigger the ESC malfunction indicator. Volvo reasoned that having separate lamps for traction control and ESC system faults

could confuse a driver and diminish the importance of addressing the fault.

Likewise, EMA noted that the current industry practice is to combine the malfunction indicator lamp for the ESC and traction control systems. EMA also observed that traction control and ESC systems share similar components and, thus, tend to fail simultaneously. EMA stated that by mandating separate traction control and ESC malfunction lamps, NHTSA would be unnecessarily requiring investment of resources to change the instrument cluster. EMA stated that in FMVSS No. 126, NHTSA permits light vehicles to use the ESC malfunction indicator to signal malfunctions in related systems such as traction control. EMA requested that NHTSA provide similar flexibility.

Bendix similarly observed that the current industry practice is to combine ESC and traction control system malfunction indicators and that having a third lamp for traction control system malfunctions is unnecessary. Bendix also stated that the interconnected nature of traction control and ESC

systems means that a failure in one system is likely to be a failure in the other system.

In response, the agency must first correct what appears to be a common misconception shared by the commenters advocating that a separate traction control malfunction indicator should not be required. Currently, NHTSA has no performance requirements for traction control systems and no requirement that a traction control system malfunction generate a telltale visible to the driver. Thus, to require an ESC-only telltale does not necessarily require separate telltales for ESC system malfunctions and traction control system malfunctions. In fact, as the comments demonstrate, nearly all traction control system malfunctions would also be ESC system malfunctions and will require an ESC system malfunction telltale to illuminate. For those limited circumstances where a traction control system malfunction is not simultaneously an ESC system malfunction, the manufacturer could

display the malfunction to the driver in any manner that is not contrary to FMVSS No. 101 or not display the malfunction at all.

D. ESC Activation Indicator

The agency requested comment on whether there is a safety need for an ESC activation indicator. We received four comments on the issue.

Daimler stated that UN ECE Regulation 13 requires an ESC activation indicator and that the U.S. should allow such an indicator. Daimler reasoned that the driver would benefit from indication of the activation of an ESC system because it may allow him to realize that a more cautious driving style may be appropriate. Moreover, Daimler argued that it would not be advantageous to have contrary requirements in the U.S. and Europe.

Volvo and Bendix stated that it currently provides ESC system activation indication by flashing the malfunction lamp during system interventions. Both Volvo and Bendix requested that NHTSA not preclude the use of system activation indicators. EMA similarly requested flexibility for manufacturers to allow system activation indicators.

Based on the comments, NHTSA is allowing, but not requiring, the use of the ESC malfunction telltale in a

flashing mode to indicate ESC operation. Furthermore, we are expressly excluding this function from the requirement that the malfunction telltale only illuminate if there is an ESC system malfunction. We believe that allowing an activation indicator will give manufacturers flexibility to inform drivers when the ESC system is activating. However, we are not requiring such an indicator because we do not believe, nor do we have any data to suggest, that drivers with activation indicators will perform better than drivers who are given no indicator. This is consistent with the agency's decision to allow, but not require, activation indicators on light vehicles.

XIV. Benefits and Costs

This section addresses the benefits and costs of the rule, including estimates of ESC system effectiveness and the size of the crash population. We also address public comments related to these issues. Much of the information in this section is derived from the Final Regulatory Impact Analysis (FRIA) associated with this final rule, which has been placed in the docket.

A. Target Crash Population

The initial target crash population for estimating benefits includes all crashes resulting in occupant fatalities, MAIS 1

and above nonfatal injuries, and property damage only crashes that were the result of either (a) first-event untripped rollover crashes and (b) loss-of-control crashes (e.g., jackknife, cargo shift, avoiding, swerving) that involved truck tractors or large buses and might be prevented if the subject vehicle were equipped with a stability control system.

We updated the estimates from the NPRM which used the 2006–2008 Fatality Analysis Reporting System (FARS) and General Estimate System (GES) to used 2006–2012 FARS and GES data. The FARS data were used for evaluating fatal crashes and the GES data were used for evaluating nonfatal crashes. The updated crash data showed a lower number of rollover crashes and injuries from rollover crashes compared to the NPRM, but a higher number of fatalities from rollover crashes. Conversely, there are a higher overall number of loss-of-control crashes and injuries resulting from those crashes compared to the NPRM, but a lower number of fatalities from loss-of-control crashes. The estimated number of crashes, fatalities, injuries, and deaths that make up the initial target population are summarized in the following table.

TABLE 4—INITIAL TARGET CRASHES, MAIS INJURIES, AND PROPERTY DAMAGE ONLY VEHICLE CRASHES BY CRASH TYPE

Crash type	Crashes	Fatalities	Injuries	PDO
Rollover	4,577	122	1,957	2,510
Loss of control	6,266	184	1,510	5,351
Total	10,843	306	3,467	7,861

Source: 2006–2012 FARS, 2006–2012 GES. PDO: property damage only.

The 2006–2012 crash data were then adjusted to take account of the estimated ESC and RSC system installation rates in model year 2018. To determine the number of crashes that could be prevented by requiring that ESC systems be installed on new truck tractors, the agency had to consider two subsets of the total crash population—those vehicles that would not be equipped with stability control systems (Base 1 population) and those vehicles that would be equipped with RSC systems (Base 2 population). The Base 1 population will benefit fully from this final rule. However, the Base 2

population will benefit only from the incremental increased effectiveness of ESC systems over RSC systems.

Based upon manufacturer production estimates, about 26.2 percent of truck tractors manufactured in model year 2012 were equipped with ESC systems and 16.0 percent were equipped with RSC systems. We also estimate that 80 percent of large buses subject to this final rule are equipped with ESC systems. Based upon historical rates of increase of installation of ESC and RSC systems, from 2013 to 2018 (which is the base model year for the cost and benefit analysis), we expect the rate of ESC system installation to increase by

approximately 15 percent annually and the rate of RSC system installation to increase by about 5 percent annually. Thus, by 2018, we expect that 33.9 percent of vehicles would be equipped with ESC systems and 21.3 percent of vehicles would be equipped with ESC systems. We would not expect that the installation rate on buses would change substantially before 2018. Adjusting the initial target crash populations using these estimates, the agency was able to estimate the Base 1 and Base 2 populations and the projected target crash population (Base 1 + Base 2) expressed in the following table.

TABLE 5—PROJECTED CRASHES, MAIS INJURIES, AND PROPERTY DAMAGE ONLY VEHICLE CRASHES BY CRASH TYPE, CRASH SEVERITY, INJURY SEVERITY, AND VEHICLE TYPE FOR 2018

Crash type	Crashes	Fatalities	Injuries	PDO
Base 1				
Rollover	2,099	56	898	1,151
Loss of Control	2,813	83	678	2,403
Total	4,912	139	1,576	3,554
Base 2				
Rollover	998	27	426	547
Loss of Control	1,337	39	322	1,142
Total	2,335	66	748	1,689
Base 1 + Base 2 (Projected Target Population)				
Rollover	3,097	83	1,324	1,698
Loss of Control	4,150	122	1,000	3,545
Total	7,247	205	2,324	5,243

Source: 2006–2012 FARS, 2006–2012 GES.
 PDO: property damage only.

The agency has also examined the same crash data sources for large buses. Based upon this examination, the agency estimates that an average of two target rollover and three loss-of-control crashes that would be affected by ESC systems occur annually. The small number of crashes combined with the high projected voluntary ESC system installation rate causes the benefits resulting from this final rule attributable to buses to be very small. Therefore, the benefits estimates for buses are not further presented and the benefits of this final rule are assumed to be the benefits derived only from truck tractors.

B. System Effectiveness

1. Summary of the NPRM

As we stated in the NPRM, direct data that would show the effectiveness of stability control systems is not available because stability control technology on heavy vehicles is relatively new. Accordingly, the effectiveness rates presented in the NPRM were built upon from three earlier studies: (1) A 2008 study on RSC that was conducted by American Transportation Research Institute and sponsored by the Federal Motor Carrier Safety Administration (FMCSA),⁶³ (2) a 2009 study that was conducted by UMTRI and Meritor WABCO and sponsored by NHTSA,⁶⁴

⁶³ Murray, D., Shackelford S., House, A., Analysis of Benefits and Costs of Roll Stability Control Systems, FMCSA–PRT–08–007 October 2008.

⁶⁴ Woodrooffe, J., Blower, D., and Green, P., Safety Benefits of Stability Control Systems for Tractor-Semitrailers, DOT HS 811 205, October 2009.

and (3) The 2011 NHTSA Research Note.⁶⁵ The effectiveness rates from the first two studies were based on computer simulation results, expert panel assessments of available crash data, input from trucking fleets that had adopted the technology, and research experiments. The third study refined the effectiveness that was established in the second study.

None of these studies derived the effectiveness from a statistical analysis of real-world crashes. Such statistical analyses require a comparison of vehicles with and without the technology. This is not feasible because ESC and RSC penetration in the national fleet of truck tractors is still small. ESC and RSC are relatively new technologies that have only been installed on a small percentage of new tractors over the past few years.

2. Summary of Comments and Response

ATA, Schneider, OOIDA, EMA, Bendix, and Martec commented on the agency’s effectiveness estimates. ATA, Schneider, and OOIDA all relied upon a study by the American Transportation Research Institute entitled “Roll Stability Systems: Cost Benefit Analysis of Roll Stability Control Verses Electronic Stability Control Using Empirical Crash Data.” EMA and OOIDA both criticized the use of simulation and expert analysis data as a substitute for real-world data. OOIDA asserted that the ATRI study represented real-world data that did not support requiring vehicles to have ESC

⁶⁵ Docket No. NHTSA–2010–0034–0043.

systems. EMA asserted that, with so many trucks on the road currently equipped with stability control systems, real-world data ought to be available. Martec presented a rebuttal to the ATRI study. Bendix conducted its own ESC and RSC system effectiveness study using a method similar to that used by NHTSA.

(a) ATRI Study

ATRI’s study concluded that equipping vehicles with RSC systems would result in fewer rollover, jackknife, and tow/truck crashes compared to ESC systems. The ATRI study used crash data, miles traveled, and financial information that they collected through their survey of 14 large and mid-size motor carriers. Of these carriers, 81.5 percent were in the truckload sector, 10.0 percent were in the less-than-truckload sector, and 8.5 percent were in the specialized sector. The ATRI sample included 135,712 trucks; of these trucks, 68,647 (50.6%) were equipped with RSC systems, 39,529 (29.1%) with ESC systems, and 27,536 (20.3%) with no stability control systems. Using the data received, ATRI calculated the crash rate per 100 million miles traveled, the crash cost per 1,000 miles traveled, and annual benefits and crash costs for three truck groups: Those with ESC systems, those with RSC systems, and those with no stability control systems. The group with no stability control systems served as the baseline to compare the other two groups. ATRI concluded that, if their sample is consistent with the industry as whole, RSC would result in fewer

rollover, jackknife, and tow/struck crashes than ESC. RSC also would provide greater benefits and lower installation costs than ESC.

Martec was asked by Bendix to evaluate the ATRI's study. Martec asserted that the methods employed by ATRI do not meet basic standards found in the global market research industry. Martec stated that, because the methods ATRI employed in its study were inadequate, the results cannot be used to draw any meaningful conclusions about the overall trucking industry's experience with stability control systems or the analysis of the costs and benefits of individual technologies as sold into the marketplace.

Martec reached four conclusions regarding ATRI's study. First, ATRI's study demonstrated confirmation bias by elaborating on its hypotheses and stating that the results of its research will be used to "inform responses" to a proposed NHTSA mandate. Second, ATRI's study lost objectivity by not collecting all evidence in a controlled and systematic way so that the results can be replicated and validated by other researchers and by not making an attempt to assure that its sample of fleets was random. Third, ATRI's study is biased due to disproportionate sampling that is not representative of the industry. Fourth, ATRI's study lacks the necessary statistical tests to address the uncertainty of the statistics.

We largely agree with Martec's conclusions regarding the ATRI study. Based in these concerns, we conclude that it is inappropriate to use ATRI's results to calculate the benefits and the cost-effectiveness of ESC and RSC systems.

ATRI's sample is subjected to self-selection bias. When soliciting data, ATRI revealed the research hypothesis in their data request form, as shown in Appendix A of the ATRI report: "ATRI's Research Advisory Committee hypothesized that, while ESC has more crash mitigation sensors than RSC systems, the higher per-unit cost of ESC may not make it as 'cost-effective' as RSC." Furthermore, in the survey form, ATRI stated that its research is intended to inform responses to NHTSA's NPRM, which proposed to mandate ESC systems on all new equipment two years after the rule goes into effect.

By revealing the hypothesis and the very specific intention of survey, ATRI potentially biased the participants' responses in favor of RSC systems. Carriers who have strong opinions in favor of RSC systems over ESC systems may have been more willing to respond than those who did not respond. We believe that this happened given that trucks with RSC systems (50.6 percent) and ESC systems (29.1 percent) are substantially overrepresented in the ATRI's sample. The self-reporting bias is further evidenced by the lack of accurate representation of trucking industry and counterintuitive crash rate outcome. Based on ATRI's data, the respondents skewed towards the truckload sector (*e.g.*, dry van, refrigerated, flatbed, intermodal container, and end-dump carriers) compared to the overall industry and thus does not represent the truck industry as a whole. Therefore, ATRI's results may not be attributed to the effects of RSC systems and ESC systems, but rather to the sample bias from self-reporting.

The quality of the self-reporting is also questionable, as evidenced by the crash rates per 100 million miles traveled as shown in Table 1 of ATRI's report. The report states that trucks equipped with ESC systems had higher rollover and jackknife crash rates than trucks equipped with RSC systems. Given that ESC systems include all of the functionality of an RSC system, that ESC systems have additional braking capability, and that ESC has substantially more effect on loss-of-control crashes, these rates are illogical. These illogical results most likely can be explained by the impact of self-selection in the sample.⁶⁶

ATRI used control and comparison methodology to examine RSC and ESC. In its approach, ATRI used the trucks without stability control as the control group and compared the crash rates of trucks equipped with ESC and RSC systems to those of the control group. For this approach, controlling confounding factors (*i.e.*, factors other than the technologies of interest that would influence the crash rates) is critical in order to draw valid

⁶⁶ The results may also reflect that the RSC systems could be tuned to be more sensitive to allow them to brake more aggressively. We noted this possibility in the NPRM.

conclusions. There is no indication that ATRI investigated whether the three groups have similar characteristics. For example, if the majority of trucks in the control group were specialty trucks and specialty trucks were prone to rollover crashes while the ESC and RSC groups were overrepresented by a different truck sector that would be prone to loss-of-control crashes, then the ATRI results are not valid to address the difference between ESC and RSC.

ATRI acknowledged that there are some confounding factors that were not controlled for. However, ATRI did not try to identify these factors and examine the effects of these factors. Examining the confounding factors is essential to the validity of the analysis. With these concerns, the agency believes that it is inappropriate to use ATRI's results to support this final rule.

There are no other sources of real-world data available to NHTSA that discriminate between crashes involving heavy vehicles equipped with stability control systems and those that do not. The UMTRI study, which includes case reviews and simulation, which has been reviewed and slightly modified by NHTSA, represents the best estimate available to the agency regarding the effectiveness of stability control systems.

(b) Bendix Study

Bendix stated that, based on over 30 years of experience on commercial vehicle dynamic, braking, and stability control systems, the agency's assessment of the effectiveness of ESC systems is conservative. Bendix reviewed the 159 cases that were used as the basis for the agency's effectiveness estimates and re-rated ESC and RSC system effectiveness based on its experience. Furthermore, Bendix identified some of these 159 cases that were not stability-control relevant and included additional cases that agency did not identify as relevant. Based upon these changes and Bendix's own estimates of ESC and RSC system effectiveness, Bendix concluded that ESC systems are 31 percent greater than RSC systems. The gap is much wider than the 6 to 7 percent estimated by NHTSA. Table 6 shows the effectiveness from Bendix's analysis and those estimated by NHTSA in the NPRM.

TABLE 6—EFFECTIVENESS COMPARISON BETWEEN BENDIX’S ANALYSIS AND NHTSA’S NPRM

	Bendix			NHTSA’s NPRM		
	Overall	Rollover	LOC	Overall	Rollover	LOC
ESC	78	83	69	28–36	40–56	14
RSC	47	58	26	21–30	37–53	3
Difference	31	25	43	6–7	3	12

The agency believes that Bendix’s method of determining system effectiveness is biased in favor of ESC systems. Prior to issuing the NPRM, the agency had shared its concerns with Bendix’s assignment of effectiveness at two meetings. The agency identified four issues.

First, for many rollover crashes, Bendix assigned a significant higher effectiveness to ESC systems compared to RSC systems. Based on the agency’s understanding of ESC and RSC system functions to prevent rollover crashes, the agency’s engineers did not believe the difference between ESC and RSC would be as pronounced as Bendix had estimated. Second, Bendix assigned a relatively high effectiveness for RSC systems against loss-of-control crashes. However, the agency’s testing suggests

that RSC systems would have a small effect on loss-of-control crashes. Third, although Bendix categorized some of the cases addressed by NHTSA as not relevant, Bendix still assigned effectiveness for those cases. This seems contradictory. Finally, Bendix included additional cases that were not included by NHTSA and UMTRI. However, these cases included truck types that are not covered by the NPRM or this final rule. Thus, while we commend Bendix for undertaking the review that NHTSA and UMTRI undertook to review individual crash cases, we cannot agree with the conclusion that ESC systems are substantially more effective than RSC systems at preventing rollover crashes.

3. Effectiveness Estimate

In this final rule, we are generally using the effectiveness estimate used the

NPRM, which was derived from 2011 research note. However, we have made two modifications. First, we have included an additional loss-of-control crash type (non-collision single-vehicle jackknife crashes) that should have been included in the PRIA. Second, because we added an additional loss-of-control crash type, we have reweighted the ratio of rollover to loss-of-control crashes. However, these modifications have not substantially changed the effectiveness rates for ESC and RSC systems from the rates presented in the NPRM. As shown in Table 7, ESC systems are considered to be 3 percent more effective than RSC systems at reducing rollover crashes and 12 percent more effective at reducing loss-of-control crashes.

TABLE 7—EFFECTIVENESS RATES FOR ESC AND RSC BY TARGET CRASH TYPES

Technology	Overall	Rollover	LOC
ESC	25–32	40–56	14
RSC	17–24	37–53	2

Although the J-turn performance test does not measure an ESC system’s ability to prevent loss-of-control crashes resulting from yaw instability, the equipment requirement ensures some level of yaw stability performance. Our assessment for yaw stability control performance is based on the ability of current generation ESC systems to prevent yaw instability, just as our assessment for roll stability performance (which does have an associated

performance test) is based on the ability of current generation ESC systems to prevent roll instability.

C. Benefits Estimates

1. Safety Benefits

The crash benefits of this final rule were derived by multiplying the projected target population, including fatalities, injuries, and property damage only crashes by the effectiveness rate for

both rollover and loss-of-control crashes. The benefits estimate for rollover crashes are presented as a range because the ESC effectiveness rate is a range. In contrast, there is only one estimate of benefits for loss-of-control crashes. Table 8 presents the benefits of this final rule. As shown in that table, this final rule will prevent 1,424 to 1,759 crashes, 40 to 49 fatalities, and 505 to 649 injuries.

TABLE 8—BENEFITS OF THE FINAL RULE

Crash type	Crashes	Fatalities	Injuries	PDO
Rollover	870–1,205	23–32	372–516	476–661
LOC	554	17	133	473
Total	1,424–1,759	40–49	505–649	949–1,134

2. Monetized Benefits

ESC systems are crash avoidance systems. Preventing a crash not only saves lives and reduces injuries, but it

also provides tangible benefits associated with the reduction in crashes. These benefits include savings from medical care, emergency services, insurance administration, workplace

costs, legal costs, congestion, property damage, and productivity. We have broken down these benefits into those that are injury related and those that are non-injury related. Of the listed

benefits, congestion and property damage reduction are non-injury-related benefits, and the others are injury-related benefits. These benefits are estimated based upon periodic examinations of the economic impact of vehicle crashes. The most recent analysis was completed in 2014.⁶⁷

We have also monetized benefits in terms of the value of a statistical life (VSL), which represents individuals' willingness to pay to reduce the risk of dying. These benefits include the value

of quality of life, household productivity, and after-tax wages. These benefits are realized through the life of the vehicle and must be discounted to reflect their value at the time of purchase.

June 2014 guidance from the Department's Office of the Secretary sets forth guidance for the treatment of VSL in regulatory analysis.⁶⁸ This guidance establishes a VSL of \$9.2 million for analyses based on 2013 economics and a 1.18 percent annual adjustment rate

for the VSL for the next 30 years. The VSL is adjusted to reflect real increases in VSL that are likely to occur in the future as consumers become economically better off in real terms over time.

Using this guidance applied to the prevention of crashes resulting in fatalities, injuries, and property damage only, the following undiscounted monetized benefits of this final rule are estimated.

TABLE 9—UNDISCOUNTED MONETIZED BENEFITS OF THE FINAL RULE
[2013 Dollars]

	Low	High
Societal Economic Savings for Crashworthiness	\$27,013,989	\$34,526,917
Congestion and Property Damage	14,234,540	17,566,251
Societal Economic Savings Total	41,248,529	52,093,168
VSL	484,836,271	603,762,776
Total Monetized Savings	526,084,800	655,855,944

D. Cost Estimate

In the NPRM, we relied upon data received from manufacturers to estimate the costs of implementing the proposal to require ESC systems on truck tractors and large buses. Based upon these submissions, NHTSA calculated that the average cost of an ESC system for both truck tractors and buses was \$1,160 and the average cost of an RSC system was \$640. Based on our estimates that 150,000 truck tractors and 2,200 buses would be covered by the proposal, and the estimates of 2012 ESC and RSC system adoption in the fleet, we estimated that the total cost of the proposal would be \$113.6 million in 2010 economics. Furthermore, we

estimated that the proposed SIS and SWD test maneuvers would cost approximately \$15,000 per test to run, assuming availability of test facilities, tracks, and vehicles.

We received specific a comment on the costs of ESC system from Bendix. Bendix stated that they did not see a correlation between the cost differential estimated in the PRIA and those from Bendix to its OEM customers. Bendix did not specify their cost differential. However, Bendix stated that when ESC was mandated, they believed the cost would be in the lower end of estimates. Thus, the net benefits of ESC would be further increased.

After publishing the NPRM, the agency published a cost teardown study

for ESC and RSC systems for heavy trucks to assess the required components and their unit costs. The results were published in a report titled, "Cost and Weight Analysis of Electronic Stability Control and Roll Stability Control for Heavy Trucks," on October 25, 2012.⁶⁹ The study looked at the incremental costs of equipping vehicles with ESC and RSC systems over a baseline of ABS by looking at one truck equipped only with ABS, two truck tractors equipped with RSC, one truck tractor equipped with ESC, and one large bus equipped with ESC. The following table shows the components and the cost of each component on the five vehicles that were examined.

TABLE 10—COMPONENT COST ESTIMATES FOR BASELINE ABS AND FOUR STABILITY TECHNOLOGY SYSTEMS IN 2013 DOLLARS ⁷⁰

	ABS WABCO tractor baseline		RSC Bendix tractor		RSC WABCO tractor		ESC Bendix large bus		ESC WABCO tractor	
	component	total	component	total	component	total	component	total	component	total
Wheel Speed Sensor ..	\$11.85	\$47.40	X	X	X	X	X	X	X	X
Wheel Speed Cables ..	5.32	21.28	X	X	X	X	X	X	X	X
Dual Modulator Valves	284.82	569.64	X	X	X	X	X	X	X	X
Modulator Valve Cables.	10.50	42.00	X	X	X	X	X	X	X	X
ECU	90.05	90.05	X	X	X	X	X	X	X	X
Delta ECU*			37.80	37.80	50.36	50.36	37.80	37.80	43.58	43.58
Solenoid Valves			29.20	58.40	29.20	58.40	29.20	58.40	29.20	87.60
Solenoid Valve Cables			9.58	19.16	9.58	19.16	9.58	19.16	9.58	28.74
Lateral Accelerometer			49.74	49.74		In ECU ..		In Yaw Sensor.		In ESC Module

⁶⁷ Blincoe, L. J., Miller, T. R., Zaloshnja, E., & Lawrence, B. A., The economic and societal impact of motor vehicle crashes, 2010, (May 2014) (DOT HS 812 013).

⁶⁸ 2014 Office of the Secretary memorandum on the "Guidance on Treatment of the Economic Value of a Statistical Life in U.S. Department of Transportation Analyses—2014 Adjustment., June 13, 2014" <http://www.dot.gov/regulations/economic-values-used-in-analysis>

⁶⁹ See Docket No. NHTSA–2011–0066–0034.

⁷⁰ The cost teardown study is in 2011 economics, and it was revised to 2013 economics using an implicit price deflator (1.033=106.588/103.199).

TABLE 10—COMPONENT COST ESTIMATES FOR BASELINE ABS AND FOUR STABILITY TECHNOLOGY SYSTEMS IN 2013 DOLLARS⁷⁰—Continued

	ABS WABCO tractor baseline		RSC Bendix tractor		RSC WABCO tractor		ESC Bendix large bus		ESC WABCO tractor	
	component	total	component	total	component	total	component	total	component	total
Modulator Valve (for trailer)**			197.82	197.82	197.82	197.82			197.82	197.82
Modulator Valve Cables (for trailer).			10.50	10.50	10.50	10.50			10.50	10.50
Yaw Rate Sensor							51.38	51.38		In ESC Module
Pressure Sensor							2.14	6.42	2.14	6.42
Pressure Sensor Cable							10.12	30.36	10.12	30.36
Steering Angle Sensor							29.50	29.50	29.50	29.50
ESC Module									85.48	85.48
ESC Module Cable									28.86	28.86
Baseline ABS Cost		770.37								
Incremental Costs Above Baseline ABS.				373.42		336.24		233.02		548.86

⁷⁰ Delta ECU is an incremental cost estimate over the cost of WABCO Tractor Baseline ABS ECU.

** Modulator Valve for trailer is added as a component in Bendix Tractor RSC, Meritor-WABCO Tractor RSC and Meritor-WABCO Tractor ESC since it is required to be installed in trailers in the final rule.

Furthermore, the installation of an ESC system requires a technician to tune a system for each vehicle. We estimate that it will take one hour of labor to perform this task at the cost of \$33.40. Additionally, this final rule requires the installation of a telltale lamp using specific symbols or text. We estimate the cost of this lamp and associated wiring at \$2.96. Thus, we estimate the total cost for installing an ESC system to be \$585.22 on truck tractors and \$269.38 on large buses. We have averaged the two estimates of the cost to install an RSC system, which is \$391.19.⁷¹ We note that this estimate generally corresponds to the lower end of the cost estimate in the FRIA, which is consistent with Bendix’s comment.

TABLE 11—SUMMARY OF ESC AND RSC SYSTEM UNIT COST ESTIMATES IN 2013 DOLLARS

ESC	\$585.22
RSC	391.19
ESC Incremental over RSC	194.03

We have also examined the effect of increased costs on vehicle sales. We expect that the cost of ESC systems is relatively small compared to the estimated average cost of a truck tractor of \$110,000. We expect that this cost will be passed on to purchasers of truck tractors and large buses. Those purchasers have indicated that truck operating costs represent about 21 percent of total operating costs, and that the elasticity of demand for truck freight is approximately -1.174. Thus, we believe that the increased costs of truck

tractors related to this final rule will reduce truck tractor sales by 101 units per year. We expect that this rule will have even less of an impact on the sales of large buses, because the average cost of a bus affected by this rule is approximately \$400,000.

Based on our assumptions regarding costs and the estimates of ESC and RSC system penetration in the market in 2018, we expect that this final rule will result in a total cost of \$45.6 million. The costs are set forth in Tables 12 and 13. This total cost is based upon 21.3 percent of truck tractors sold annually upgrading from RSC systems to ESC systems, 44.8 percent of truck tractors sold annually without stability control systems installing ESC systems, and 20.0 percent of large buses sold annually without stability control systems installing ESC systems.

TABLE 12—TOTAL COST OF THE FINAL RULE [2013 \$]

	Technology Upgrade Needed		
	None	Upgrade RSC to ESC	ESC
Truck Tractors:			
% Needing Improvements	33.9%	21.3%	44.8%
150,000 Sales Estimated	50,850	31,950	67,200
Costs per Affected Vehicle	0	\$194.03	\$585.22
Total Costs	0	\$6.2 M	\$39.3 M
Large Buses:			
% Needing Improvements	80%	0%	20%
2,200 Sales Estimated	1,760	0	440
Costs per Affected Vehicle	0	NA	\$269.38
Total Costs	0	\$0 M	\$0.1 M

M: million.

⁷¹ Unlike in the NPRM, the cost of installing an ESC system on a bus is considered to be

substantially less than on a truck tractor. This is

because an ESC system on a bus is not required to control a trailer’s brakes.

TABLE 13—SUMMARY OF VEHICLE COSTS
[2013 \$]

	Average vehicle costs	Total costs
Truck Tractors	\$303.50	\$45.5 M
Large Buses	53.90	0.1 M
Total	299.90	45.6 M

The agency estimates that the cost of executing the J-turn test maneuvers will be \$13,400 per truck tractor and \$20,100 per large bus, assuming access is available to test facilities, tracks, and

vehicles. The costs include preparation, brake burnish test, and other miscellaneous preparations and required equipment. Table 14 presents these estimated costs. In addition, for

comparison purpose, the table also includes the costs for SWD maneuver that was proposed in the NPRM.⁷²

TABLE 14—ESTIMATED COMPLIANCE TEST COST PER VEHICLE
[2013 \$]

Cost Items	J-Turn		SWD	
	Tractor	Large Bus	Tractor	Large Bus
(1) Preparing for and executing the test maneuvers,	\$8,400.00	\$12,800.00	\$10,800.00	\$14,700.00
(2) Executing brake burnish test, and	2,600.00	3,600.00	2,600.00	3,600.00
(3) Other miscellaneous preparations and required equipment such as	2,400.00	3,700.00	3,400.00	4,800.00
(a) Brake conditioning between maneuvers,				
(b) Jackknife cable maintenance,				
(c) ballast loading, and				
(d) Post data processing, i.e., LAR and Torque reduction process				
Sum	13,400.00	20,100.00	16,800.00	23,100.00

E. Cost Effectiveness

Safety benefits can occur at any time during the vehicle's lifetime. Therefore, the benefits are discounted at both 3 and 7 percent to reflect their values in 2013

dollars, as reflected in Table 15. Table 15 also shows that the net cost per equivalent life saved from this final rule range from \$0.1 to \$0.3 million at a 3 percent discount rate and from \$0.3 to \$0.6 million at a 7 percent discount rate.

The net benefits of this final rule are estimated to range from \$412 to \$525 million at a 3 percent discount rate and from \$312 to \$401 million at a 7 percent discount rate.

TABLE 15—SUMMARY OF COST-EFFECTIVENESS AND NET BENEFITS BY DISCOUNT RATE
[2013 \$]

	3% Discount		7% Discount	
	Low	High	Low	High
Fatal Equivalents	40	50	32	40
Societal Economic Savings for Crashworthiness	\$21,816,498	\$27,883,938	\$17,288,953	\$22,097,227
Congestion and Property Damage	11,495,815	14,186,504	9,110,106	11,242,401
Total Societal Economic Savings (1)	33,312,313	42,070,442	26,399,059	33,339,628
VSL	424,352,045	528,442,215	331,681,943	413,040,877
Total Monetized Savings (2)	457,664,358	570,512,657	358,081,002	446,380,505
Vehicle Costs*	45,644,570	45,644,570	45,644,570	45,644,570
Net Costs (3)	12,332,257	3,574,128	19,245,511	12,304,942
Net Cost Per Fatal Equivalent (4)	308,306	71,483	601,422	307,624
Net Benefits (5)	412,019,788	524,868,087	312,436,432	400,735,935

* Vehicle costs are not discounted, since they occur when the vehicle is purchased, whereas benefits occur over the vehicle's lifetime and are discounted back to the time of purchase.

- (1) = Societal Economic Savings for Crashworthiness + VSL Savings.
- (2) = Societal Economic Savings + VSL.
- (3) = Vehicle Costs – Total Societal Economic Savings.
- (4) = Net Costs/Fatal Equivalents.
- (5) = VSL – Net Costs.

⁷² We have revised the estimated SWD maneuver costs from the PRIA. In the PRIA, the estimated cost for SWD is \$15,000 which included \$10,000 for

preparing for and executing the maneuvers, \$2,000 for executing FMVSS No. 121 brake burnish test,

and \$3,000 for other miscellaneous preparations and required equipment.

F. Comparison of Regulatory Alternatives

The agency considered two alternatives to this final rule. The first alternative was requiring RSC systems be installed on all newly manufactured truck tractors and buses covered by this final rule. The second alternative was requiring RSC systems be installed on all newly manufactured trailers.

Regarding the first alternative, requiring RSC systems be installed on

truck tractors and large buses, our research has concluded that RSC systems are less effective than ESC systems. An RSC system is only slightly less effective at preventing rollover crashes than an ESC system, but it is much less effective at preventing loss-of-control crashes. However, RSC systems are estimated to cost less than ESC systems. Furthermore, only approximately 44.8% of truck tractors will be required to install RSC systems based on data regarding manufacturers'

plans and the agency's estimates of ESC and RSC system adoption rates between 2012 and 2018.

A summary of the cost effectiveness of RSC systems is set forth in Table 16. When comparing this alternative to this final rule, requiring RSC systems rather than ESC systems would be slightly more cost effective. However, this alternative would save fewer lives and have lower net benefits than this final rule. Consequently, the agency has rejected this alternative.

TABLE 16—SUMMARY OF COST-EFFECTIVENESS AND NET BENEFITS BY DISCOUNT RATE
ALTERNATIVE 1—REQUIRING TRACTOR-BASED RSC SYSTEMS
[2013 \$]

	3% Discount		7% Discount	
	Low	High	Low	High
Fatal Equivalents	25	35	20	28
Societal Economic Savings—Crashworthiness	\$14,708,167	\$20,700,276	\$11,655,804	\$16,404,380
Congestion and Property Damage	6,694,636	9,378,093	5,305,308	7,431,871
Total Societal Economic Savings (1)	21,402,803	30,078,369	16,961,112	23,836,251
VSL	260,249,473	363,828,274	203,416,130	284,375,367
Total Monetized Savings (2)	281,652,276	393,906,643	220,377,242	308,211,618
Vehicle Costs*	26,406,495	26,406,495	26,406,495	26,406,495
Net Costs (3)	5,003,692	-3,671,874	9,445,383	2,570,244
Net Cost Per Fatal Equivalent (4)	200,148	N/A	472,269	91,794
Net Benefits (5)	255,245,781	367,500,148	193,970,747	281,805,123

* Vehicle costs are not discounted, since they occur when the vehicle is purchased, whereas benefits occur over the vehicle's lifetime and are discounted back to the time of purchase.

(1) = Societal Economic Savings – Crashworthiness + VSL Savings.

(2) = Societal Economic Savings + VSL.

(3) = Vehicle Costs – Total Societal Economic Savings; Cost per equivalent life saved is not presented where the alternative results in negative net cost because there would be no cost per equivalent life saved.

(4) = Net Costs/Fatal Equivalents.

(5) = VSL – Net Costs.

The second alternative considered was requiring trailer-based RSC systems to be installed on all newly manufactured trailers. Trailer-based RSC systems are only expected to prevent rollover crashes. Based on 2006–2012 GES data, 98 percent of the target truck-tractor crashes involve truck tractors with trailers attached. Therefore, the base crash population is 98 percent of Base 1 discussed above.

As discussed in the NPRM, it became apparent during testing that trailer-based stability control systems were less effective than tractor-based systems because trailer-based systems could only control the trailer's brakes. Based upon the agency's testing of trailer-based RSC systems using a 150-foot J-

turn test maneuver, the benefits of trailer-based RSC systems in preventing rollover are about 17.6 percent of tractor-based ESC systems, corresponding to an effectiveness rate of 7 to 10 percent.

The agency estimates that about 217,000 new trailers are manufactured each year. Further, based on information from manufacturers, the agency estimates that a trailer-based RSC system costs \$400 per trailer. Available data indicates that as much as 5 percent of the current annual production of trailers comes with RSC systems installed. Assuming all new trailers would be required to install RSC, the cost of this alternative is estimated to be \$74.7 million.

Table 17 sets forth a summary of the cost effectiveness of trailer-based RSC systems. Because the operational life of a trailer (approximately 45 years) is much longer than that of a truck tractor, it would take longer for trailer-based RSC systems to fully penetrate the fleet than it would for any tractor-based system. Therefore, when the benefits of trailer-based RSC systems are discounted at a 3 and 7 percent rate, there is a much higher discount factor. As can be seen in Table 17, this results in this alternative having negative net benefits and a high cost per life saved. Also, this alternative would have no effect on buses. Accordingly, the agency has rejected this alternative.

TABLE 17—SUMMARY OF COST-EFFECTIVENESS AND NET BENEFITS BY DISCOUNT RATE
ALTERNATIVE 2—REQUIRING TRAILER-BASED RSC SYSTEMS
[2013 \$]

	3% Discount		7% Discount	
	Low	High	Low	High
Fatal Equivalents	3	3	2	2

TABLE 17—SUMMARY OF COST-EFFECTIVENESS AND NET BENEFITS BY DISCOUNT RATE—Continued
 ALTERNATIVE 2—REQUIRING TRAILER-BASED RSC SYSTEMS
 [2013 \$]

	3% Discount		7% Discount	
	Low	High	Low	High
Societal Economic Savings—Crashworthiness	\$1,571,042	\$2,036,588	\$1,057,467	\$1,370,825
Congestion and Property Damage	684,213	938,236	460,543	631,526
Total Societal Economic Savings (1)	2,255,255	2,974,824	1,518,010	2,002,351
VSL	30,196,954	39,659,995	19,696,851	25,869,398
Total Monetized Savings (2)	32,452,209	42,634,819	21,214,861	27,871,749
Vehicle Costs *	74,734,800	74,734,800	74,734,800	74,734,800
Net Costs (3)	72,479,545	71,759,976	73,216,790	72,732,449
Net Cost Per Fatal Equivalent (4)	24,159,848	23,919,992	36,608,395	36,366,225
Net Benefits (5)	-42,282,591	-32,099,981	-53,519,939	-46,863,051

* Vehicle costs are not discounted, since they occur when the vehicle is purchased, whereas benefits occur over the vehicle's lifetime and are discounted back to the time of purchase.

(1) = Societal Economic Savings - Crashworthiness + VSL Savings.

(2) = Societal Economic Savings + VSL.

(3) = Vehicle Costs - Total Societal Economic Savings; negative means benefits are greater than the cost.

(4) = Net Costs/Fatal Equivalents.

(5) = VSL - Net Costs.

XV. Regulatory Analyses and Notices

A. Executive Order 12866, Executive Order 13563, and DOT Regulatory Policies and Procedures

NHTSA has considered the impact of this rulemaking action under Executive Order 12866, Executive Order 13563, and the Department of Transportation's regulatory policies and procedures. This rulemaking is considered economically significant and was reviewed by the Office of Management and Budget under E.O. 12866, "Regulatory Planning and Review." The rulemaking action has also been determined to be significant under the Department's regulatory policies and procedures. NHTSA has placed in the docket a Final Regulatory Impact Analysis (FRIA) describing the benefits and costs of this rulemaking action. The benefits and costs are summarized in section XIV of this preamble.

Consistent with Executive Order 13563 and to the extent permitted under the Vehicle Safety Act, we have considered the cumulative effects of the new regulations stemming from NHTSA's 2007 "NHTSA's Approach to Motorcoach Safety" plan, DOT's 2009 Motorcoach Safety Action Plan, and the Motorcoach Enhanced Safety Act, and have taken steps to identify opportunities to harmonize and streamline those regulations. By coordinating the timing and content of the rulemakings, our goal is to expeditiously maximize the net benefits of the regulations (by either increasing benefits or reducing costs or a combination of the two) while simplifying requirements on the public and ensuring that the requirements are

justified. We seek to ensure that this coordination will also simplify the implementation of multiple requirements on a single industry.

NHTSA's Motorcoach Safety Action Plan identified four priority areas—passenger ejection, rollover structural integrity, emergency egress, and fire safety. There have been other initiatives on large bus performance, such as ESC systems—an action included in the DOT plan—and an initiative to update the large bus tire standard.⁷³ In deciding how best to initiate and coordinate rulemaking in these areas, NHTSA examined various factors including the benefits that would be achieved by the rulemakings, the anticipated vehicle designs and countermeasures needed to comply with the regulations, and the extent to which the timing and content of the rulemakings could be coordinated to lessen the need for multiple redesign and to lower overall costs. After this examination, we decided on a course of action that prioritized the goal of reducing passenger ejection and increasing frontal impact protection because many benefits could be achieved expeditiously with countermeasures that were readily available (using bus seats with integral seat belts, which are already available from seat suppliers) and whose installation would not significantly impact other vehicle designs. Similarly, we have also determined that an ESC rulemaking presents relatively few synchronization issues with other rules, because the vehicles at issue already have the foundation braking systems needed for the stability control

technology and the additional equipment necessary for an ESC system are sensors that are already available and that can be installed without significant effect on other vehicle systems. Further, we estimate that 80 percent of the affected buses already have ESC systems. We realize that a rollover structural integrity rulemaking, or an emergency egress rulemaking, could involve more redesign of vehicle structure than rules involving systems such as seat belts, ESC, or tires.⁷⁴ Our decision-making in these and all the rulemakings outlined in the "NHTSA's Approach to Motorcoach Safety" plan, DOT's Motorcoach Safety Action Plan, and the Motorcoach Enhanced Safety Act will be cognizant of the timing and content of the actions so as to simplify requirements applicable to the public and private sectors, ensure that requirements are justified, and increase the net benefits of the resulting safety standards.

B. Regulatory Flexibility Act

Pursuant to the Regulatory Flexibility Act (5 U.S.C. 601 *et seq.*, as amended by the Small Business Regulatory Enforcement Fairness Act (SBREFA) of 1996), whenever an agency is required to publish a notice of rulemaking for any proposed or final rule, it must prepare and make available for public comment a regulatory flexibility analysis that describes the effect of the rule on small entities (*i.e.*, small businesses, small organizations, and small governmental jurisdictions). The Small Business Administration's

⁷⁴ The initiative on fire safety is in a research phase. Rulemaking resulting from the research will not occur in the near term.

⁷³ 75 FR 60037 (Sept. 29, 2010).

regulations at 13 CFR part 121 define a small business, in part, as a business entity “which operates primarily within the United States.” (13 CFR 121.105(a)). No regulatory flexibility analysis is required if the head of an agency certifies the rule will not have a significant economic impact on a substantial number of small entities. SBREFA amended the Regulatory Flexibility Act to require Federal agencies to provide a statement of the factual basis for certifying that a rule will not have a significant economic impact on a substantial number of small entities.

NHTSA has considered the effects of this final rule under the Regulatory Flexibility Act. I certify that this final rule will not have a significant economic impact on a substantial number of small entities. This final rule will directly impact manufacturers of truck-tractors, large buses, and stability control systems for those vehicles. It will indirectly affect purchasers of new truck-tractors and large buses, which include both fleets and owner-operators. NHTSA believes the entities directly affected by this rule do not qualify as small entities. Inasmuch as some second-stage manufacturers of certain body-on-frame buses that are subject to this final rule are small businesses, this final rule will not substantially affect those small businesses. The small manufacturers that may be affected by this rule are final stage manufacturers that purchase incomplete vehicles from other large manufacturers and complete the manufacturing process. The incomplete vehicle manufacturers, which we do not believe are small businesses, typically certify compliance with all braking-related standards and we believe ESC would be included among those. The sole effect on the final stage manufacturers is a marginal increase in the cost of incomplete vehicles due to the addition of ESC systems. This additional cost is very small relative to the average cost of buses subject to this final rule (\$200,000 to \$500,000), and the costs would likely ultimately be passed on to the final purchaser.

C. Executive Order 13132 (Federalism)

NHTSA has examined this final rule pursuant to Executive Order 13132 (64 FR 43255, August 10, 1999) and concluded that no additional consultation with States, local governments or their representatives is mandated beyond the rulemaking process. The agency has concluded that the rulemaking will not have sufficient federalism implications to warrant consultation with State and local

officials or the preparation of a federalism summary impact statement. The final rule will not have “substantial direct effects on the States, on the relationship between the national government and the States, or on the distribution of power and responsibilities among the various levels of government.”

NHTSA rules can preempt in two ways. First, the National Traffic and Motor Vehicle Safety Act contains an express preemption provision: When a motor vehicle safety standard is in effect under this chapter, a State or a political subdivision of a State may prescribe or continue in effect a standard applicable to the same aspect of performance of a motor vehicle or motor vehicle equipment only if the standard is identical to the standard prescribed under this chapter. 49 U.S.C. 30103(b)(1). It is this statutory command by Congress that preempts any non-identical State legislative and administrative law addressing the same aspect of performance.

The express preemption provision described above is subject to a savings clause under which “[c]ompliance with a motor vehicle safety standard prescribed under this chapter does not exempt a person from liability at common law.” 49 U.S.C. 30103(e). Pursuant to this provision, State common law tort causes of action against motor vehicle manufacturers that might otherwise be preempted by the express preemption provision are generally preserved. However, the Supreme Court has recognized the possibility, in some instances, of implied preemption of such State common law tort causes of action by virtue of NHTSA’s rules, even if not expressly preempted. This second way that NHTSA rules can preempt is dependent upon there being an actual conflict between an FMVSS and the higher standard that would effectively be imposed on motor vehicle manufacturers if someone obtained a State common law tort judgment against the manufacturer, notwithstanding the manufacturer’s compliance with the NHTSA standard. Because most NHTSA standards established by an FMVSS are minimum standards, a State common law tort cause of action that seeks to impose a higher standard on motor vehicle manufacturers will generally not be preempted. However, if and when such a conflict does exist—for example, when the standard at issue is both a minimum and a maximum standard—the State common law tort cause of action is impliedly preempted. See *Geier v. American Honda Motor Co.*, 529 U.S.C. 861 (2000).

Pursuant to Executive Order 13132 and 12988, NHTSA has considered whether this rule could or should preempt State common law causes of action. The agency’s ability to announce its conclusion regarding the preemptive effect of one of its rules reduces the likelihood that preemption will be an issue in any subsequent tort litigation.

To this end, the agency has examined the nature (*e.g.*, the language and structure of the regulatory text) and objectives of this rule and finds that this rule, like many NHTSA rules, prescribes only a minimum safety standard. As such, NHTSA does not intend that this rule preempt state tort law that would effectively impose a higher standard on motor vehicle manufacturers than that established by this rule. Establishment of a higher standard by means of State tort law would not conflict with the minimum standard announced here. Without any conflict, there could not be any implied preemption of a State common law tort cause of action.

D. Executive Order 12988 (Civil Justice Reform)

With respect to the review of the promulgation of a new regulation, section 3(b) of Executive Order 12988, “Civil Justice Reform” (61 FR 4729; Feb. 7, 1996), requires that Executive agencies make every reasonable effort to ensure that the regulation: (1) clearly specifies the preemptive effect; (2) clearly specifies the effect on existing Federal law or regulation; (3) provides a clear legal standard for affected conduct, while promoting simplification and burden reduction; (4) clearly specifies the retroactive effect, if any; (5) specifies whether administrative proceedings are to be required before parties file suit in court; (6) adequately defines key terms; and (7) addresses other important issues affecting clarity and general draftsmanship under any guidelines issued by the Attorney General. This document is consistent with that requirement.

Pursuant to this Order, NHTSA notes as follows. The issue of preemption is discussed above. NHTSA notes further that there is no requirement that individuals submit a petition for reconsideration or pursue other administrative proceedings before they may file suit in court.

E. Protection of Children From Environmental Health and Safety Risks

Executive Order 13045, “Protection of Children from Environmental Health and Safety Risks” (62 FR 19855, April 23, 1997), applies to any rule that: (1) is determined to be “economically significant” as defined under Executive

Order 12866, and (2) concerns an environmental, health, or safety risk that the agency has reason to believe may have a disproportionate effect on children. If the regulatory action meets both criteria, the agency must evaluate the environmental health or safety effects of the planned rule on children, and explain why the planned regulation is preferable to other potentially effective and reasonably feasible alternatives considered by the agency.

This document is part of a rulemaking that is not expected to have a disproportionate health or safety impact on children. Consequently, no further analysis is required under Executive Order 13045.

F. Paperwork Reduction Act

Under the Paperwork Reduction Act of 1995 (PRA), a person is not required to respond to a collection of information by a Federal agency unless the collection displays a valid OMB control number. There is not any information collection requirement associated with this final rule.

G. National Technology Transfer and Advancement Act

Section 12(d) of the National Technology Transfer and Advancement Act (NTTAA) requires NHTSA to evaluate and use existing voluntary consensus standards in its regulatory activities unless doing so would be inconsistent with applicable law (*e.g.*, the statutory provisions regarding NHTSA's vehicle safety authority) or otherwise impractical. Voluntary consensus standards are technical standards developed or adopted by voluntary consensus standards bodies. Technical standards are defined by the NTTAA as "performance-based or design-specific technical specification and related management systems practices." They pertain to "products and processes, such as size, strength, or technical performance of a product, process or material."

Examples of organizations generally regarded as voluntary consensus standards bodies include ASTM International, SAE International (SAE), and the American National Standards Institute (ANSI). If NHTSA does not use available and potentially applicable voluntary consensus standards, we are required by the Act to provide Congress, through OMB, an explanation of the reasons for not using such standards.

This final rule requires truck tractors and large buses to have electronic stability control systems. In the definitional criteria, the agency adapted the criteria based on the light vehicle ESC rulemaking, which was based on

(with minor modifications) SAE Surface Vehicle Information Report on Automotive Stability Enhancement Systems J2564 JUN2004 that provides an industry consensus definition of an ESC system. In addition, SAE International has a Recommended Practice on Brake Systems Definitions—Truck and Bus, J2627 AUG2009 that has been incorporated into the agency's definition.

The agency based the performance requirement (with modifications) on SAE Surface Vehicle Recommended Practice J266 JAN96, Steady-State Directional Control Test Procedures for Passenger Cars and Light Trucks. UN ECE Regulation 13 also allows the J-Turn test maneuver as one option to be used for demonstrating proper function of an ESC system.

The agency has also incorporated by reference two ASTM standards in order to provide specifications for the road test surface. These are: (1) ASTM E1136–93 (Reapproved 2003), "Standard Specification for a Radial Standard Reference Test Tire," and (2) ASTM E1337–90 (Reapproved 2008), "Standard Test Method for Determining Longitudinal Peak Braking Coefficient of Paved Surfaces Using a Standard Reference Test Tire."

H. Unfunded Mandates Reform Act

Section 202 of the Unfunded Mandates Reform Act of 1995 (UMRA) requires federal agencies to prepare a written assessment of the costs, benefits, and other effects of proposed or final rules that include a Federal mandate likely to result in the expenditure by State, local, or tribal governments, in the aggregate, or by the private sector, of more than \$100 million annually (adjusted for inflation with base year of 1995). Before promulgating a rule for which a written statement is needed, section 205 of the UMRA generally requires the agency to identify and consider a reasonable number of regulatory alternatives and adopt the least costly, most cost-effective, or least burdensome alternative that achieves the objectives of the rule. The provisions of section 205 do not apply when they are inconsistent with applicable law. Moreover, section 205 allows the agency to adopt an alternative other than the least costly, most cost-effective, or least burdensome alternative if the agency publishes with the final rule an explanation of why that alternative was not adopted.

This final rule will not result in any expenditure by State, local, or tribal governments or the private sector of more than \$100 million, adjusted for inflation.

I. National Environmental Policy Act

NHTSA has analyzed this rulemaking action for the purposes of the National Environmental Policy Act. The agency has determined that implementation of this action will not have any significant impact on the quality of the human environment.

J. Incorporation by Reference

As discussed earlier in the relevant portions of this document, we are incorporating by reference various materials into the Code of Federal Regulations in this rulemaking. The standards we are incorporating are:

- ASTM E1136–93 (Reapproved 2003), "Standard Specification for a Radial Standard Reference Test Tire," approved March 15, 1993.
- ASTM E1337–90 (Reapproved 2008), "Standard Test Method for Determining Longitudinal Peak Braking Coefficient of Paved Surfaces Using a Standard Reference Test Tire," approved June 1, 2008.

Under 5 U.S.C. 552(a)(1)(E), Congress allows agencies to incorporate by reference materials that are reasonably available to the class of persons affected if the agency has approval from the Director of the Federal Register. As a part of that approval process, the Director of the Federal Register (in 1 CFR 51.5) directs agencies to discuss (in the preamble) the ways that the materials we are incorporating by reference are reasonably available to interested parties. Further the Director requires agencies to summarize the material that they are incorporating [proposing to incorporate] by reference.

NHTSA has worked to ensure that standards being considered for incorporation by reference are reasonably available to the class of persons affected. In this case, those directly affected by incorporated provisions are NHTSA and parties contracting with NHTSA to conduct testing of new vehicles. New vehicle manufacturers may also be affected to the extent they wish to conduct NHTSA's compliance test procedures on their own vehicles. These entities have access to copies of aforementioned standards through ASTM International for a reasonable fee. These entities have the financial capability to obtain a copy of the material incorporated by reference.

Other interested parties in the rulemaking process beyond the class affected by the regulation include members of the public, safety advocacy groups, etc. Such interested parties can access the standard by obtaining a copy from the aforementioned standards development organizations.

Interested parties may also access the standards through NHTSA or the National Archives and Records Administration (NARA). All approved material is available for inspection at NHTSA, 1200 New Jersey Avenue SE., Washington, DC 20590, and at the National Archives and Records Administration (NARA). For information on the availability of this material at NHTSA, contact NHTSA's Office of Technical Information Services, phone number (202) 366-2588. For information on the availability of this material at NARA, call (202) 741-6030, or go to: <http://www.archives.gov/federal-register/cfr/ibr-locations.html>.

Finally, we have also described and summarized the materials that we are incorporating by reference in this document to give all interested parties an effective opportunity to comment. The materials were previously discussed in section XI.G.

K. Regulatory Identifier Number (RIN)

The Department of Transportation assigns a regulation identifier number (RIN) to each regulatory action listed in the Unified Agenda of Federal Regulations. The Regulatory Information Service Center publishes the Unified

Agenda in April and October of each year. You may use the RIN contained in the heading at the beginning of this document to find this action in the Unified Agenda.

L. Privacy Act

Anyone is able to search the electronic form of all comments received into any of our dockets by the name of the individual submitting the comment (or signing the comment, if submitted on behalf of an association, business, labor union, etc.). You may review DOT's complete Privacy Act Statement in the **Federal Register** published on April 11, 2000 (65 FR 19477-78).

List of Subjects in 49 CFR Part 571

Imports, Incorporation by reference, Motor vehicle safety, Motor vehicles, Rubber and rubber products, Tires.

Regulatory Text

In consideration of the foregoing, we amend 49 CFR part 571 as follows:

PART 571—FEDERAL MOTOR VEHICLE SAFETY STANDARDS

■ 1. The authority citation for part 571 continues to read as follows:

Authority: 49 U.S.C. 322, 30111, 30115, 30166 and 30177; delegation of authority at 49 CFR 1.95.

■ 2. Revise paragraphs (d)(33) and (34) of § 571.5 to read as follows:

§ 571.5 Matter incorporated by reference.

* * * * *

(d) * * *

(33) ASTM E1136-93 (Reapproved 2003), "Standard Specification for a Radial Standard Reference Test Tire," approved March 15, 1993, into §§ 571.105; 571.121; 571.122; 571.126; 571.135; 571.136; 571.139; 571.500.

(34) ASTM E1337-90 (Reapproved 2008), "Standard Test Method for Determining Longitudinal Peak Braking Coefficient of Paved Surfaces Using a Standard Reference Test Tire," approved June 1, 2008, into §§ 571.105; 571.121; 571.122; 571.126; 571.135; 571.136; 571.500.

* * * * *

■ 3. Revise Table 1 of § 571.101 to read as follows:

§ 571.101 Standard No. 101; Controls and displays.

Table 1
Controls, Telltales, and Indicators
With Illumination or Color Requirements¹

Column 1 ITEM	Column 2 SYMBOL	Column 3 WORDS OR ABBRE- VIATIONS	Column 4 FUNCTION	Column 5 ILLUMIN- ATION	Column 6 COLOR
Highbeam ²	 3, 5	-----	Telltale	-----	Blue or Green ⁴
Turn signals ²	 3, 6	-----	Control	-----	-----
			Telltale	-----	Green ⁴
Hazard warning signal	 3	Hazard	Control	Yes	-----
		-----	Telltale ⁷	-----	-----
Position, side marker, end- outline marker, identification, or clearance lamps	 3, 8	Marker Lamps or MK Lps ⁸	Control	Yes	-----
Windshield wiping system		Wiper or Wipe	Control	Yes	-----
Windshield washing system		Washer or Wash	Control	Yes	-----
Windshield washing and wiping system combined		Washer-Wiper or Wash-Wipe	Control	Yes	-----
Windshield defrosting and defogging system		Defrost, Defog, or Def.	Control	Yes	-----
Rear window defrosting and defogging system		Rear Defrost, Rear Defog, Rear Def., or R-Def.	Control	Yes	-----

Column 1 ITEM	Column 2 SYMBOL	Column 3 WORDS OR ABBRE- VIATIONS	Column 4 FUNCTION	Column 5 ILLUMIN- ATION	Column 6 COLOR
Brake system malfunction	-----	Brake	Telltale	-----	Red ⁴
Antilock brake system malfunction for vehicles subject to FMVSS 105 or 135	-----	Antilock, Anti-lock, or ABS ⁹	Telltale	-----	Yellow
Malfunction in Variable Brake Proportioning System	-----	Brake Proportioning ⁹	Telltale	-----	Yellow
Regenerative brake system malfunction	-----	RBS or ABS/RBS ⁹	Telltale	-----	Yellow
Malfunction in antilock system for vehicles other than trailers subject to FMVSS 121	-----	ABS or Antilock ⁹	Telltale	-----	Yellow
Antilock brake system trailer fault for vehicles subject to FMVSS 121		Trailer ABS or Trailer Antilock	Telltale	-----	Yellow
Brake pressure (for vehicles subject to FMVSS 105 or 135)	-----	Brake Pressure ⁹	Telltale	-----	Red ⁴
Low brake fluid condition (for vehicles subject to FMVSS 105 or 135)	-----	Brake Fluid ⁹	Telltale	-----	Red ⁴
Parking brake applied (for vehicles subject to FMVSS 105 or 135)	-----	Park or Parking Brake ⁹	Telltale	-----	Red ⁴
Brake lining wear-out condition (for vehicles subject to FMVSS 135)	-----	Brake Wear ⁹	Telltale	-----	Red ⁴
Electronic Stability Control System Malfunction (for vehicles subject to FMVSS 126) ^{10, 11}		ESC ¹²	Telltale	-----	Yellow
Electronic Stability Control		ESC OFF	Control	Yes	-----

Column 1 ITEM	Column 2 SYMBOL	Column 3 WORDS OR ABBRE- VIATIONS	Column 4 FUNCTION	Column 5 ILLUMIN- ATION	Column 6 COLOR
System "OFF" (for vehicles subject to FMVSS 126) ¹⁰			Telltale	-----	Yellow
Electronic Stability Control System Malfunction (for vehicles subject to FMVSS 136) ¹¹		ESC	Telltale	-----	Yellow
Fuel Level		Fuel	Telltale	-----	-----
			Indicator	Yes	-----
Engine oil pressure	 ¹³	Oil	Telltale	-----	-----
			Indicator	Yes	-----
Engine coolant temperature	 ¹³	Temp	Telltale	-----	-----
			Indicator	Yes	-----
Electrical charge		Volts or Charge or Amp	Telltale	-----	-----
			Indicator	Yes	-----
Engine stop	-----	Engine Stop ¹⁴	Control	Yes	-----
Automatic vehicle speed (cruise control)	-----	-----	Control	Yes	-----

Column 1 ITEM	Column 2 SYMBOL	Column 3 WORDS OR ABBRE- VIATIONS	Column 4 FUNCTION	Column 5 ILLUMIN- ATION	Column 6 COLOR
Speedometer	-----	MPH, or MPH and km/h ¹⁵	Indicator	Yes	-----
Heating and Air conditioning system	-----	-----	Control	Yes	-----
Automatic transmission control position <i>(park)</i> <i>(reverse)</i> <i>(neutral)</i> <i>(drive)</i>	-----	P R N D ¹⁶	Indicator	Yes	-----
Heating and/or air conditioning fan	 or	Fan	Control	Yes	-----
Low Tire Pressure (including malfunction) (See FMVSS 138)	 ¹⁷	Low Tire ¹⁷	Telltale	-----	Yellow
Low Tire Pressure (including malfunction that identifies involved tire) (See FMVSS 138)	 ¹⁷	Low Tire ¹⁷	Telltale	-----	Yellow
Tire Pressure Monitoring System Malfunction (See FMVSS 138) ¹⁸	-----	TPMS ^{17, 19}	Telltale	-----	Yellow

Notes:

¹ An identifier is shown in this table if it is required for a control for which an illumination requirement exists or if it is used for a telltale for which a color requirement exists. If a line appears in column 2 and column 3, the control, telltale, or indicator is required to be identified, however the form of the identification is the manufacturer's option. Telltales are not considered to have an illumination requirement, because by definition the telltale must light when the condition for its activation exists.

² Additional requirements in FMVSS 108.

³ Framed areas of the symbol may be solid; solid areas may be framed.

⁴ Blue may be blue-green. Red may be red-orange.

⁵ Symbols employing four lines instead of five may also be used.

⁶ The pair of arrows is a single symbol. When the controls or telltales for left and right turn operate independently, however, the two arrows may be considered separate symbols and be spaced accordingly.

⁷ Not required when arrows of turn signal telltales that otherwise operate independently flash simultaneously as hazard warning telltale.

⁸ Separate identification is not required if function is combined with master lighting switch.

⁹ Refer to FMVSS 105 or FMVSS 135, as appropriate, for additional specific requirements for brake telltale labeling and color. If a single telltale is used to indicate more than one brake system condition, the brake system malfunction identifier must be used.

¹⁰ Requirement effective September 1, 2011.

¹¹ A manufacturer may use this telltale in flashing mode to indicate ESC operation.

¹² This symbol may also be used to indicate the malfunction of related systems/functions, including traction control, trailer stability assist, corner brake control, and other similar functions that use throttle and/or individual wheel torque control to operate and share common components with ESC.

¹³ Combination of the engine oil pressure symbol and the engine coolant temperature symbol in a single telltale is permitted.

¹⁴ Use when engine control is separate from the key locking system.

¹⁵ If the speedometer is graduated in both miles per hour and in kilometers per hour, the scales must be identified "MPH" and "km/h", respectively, in any combination of upper- and lowercase letters.

¹⁶ The letters 'P', 'R', 'N', and 'D' are considered separate identifiers for the individual gear positions. Their locations within the vehicle, and with respect to each other, are governed by FMVSS 102. The letter 'D' may be replaced by another alphanumeric character or symbol chosen by the manufacturer.

¹⁷ Required only for FMVSS 138 compliant vehicles.

¹⁸ Alternatively, either low tire pressure telltale may be used to indicate a TPMS malfunction. See FMVSS 138.

¹⁹ Required only for vehicles manufactured on or after September 1, 2007.

* * * * *

■ 4. Revise the heading of § 571.126 to read as follows:

§ 571.126 Standard No. 126; Electronic stability control systems for light vehicles.

* * * * *

■ 5. Add § 571.136 to read as follows:

§ 571.136 Standard No. 136; Electronic stability control systems for heavy vehicles.

S1 Scope. This standard establishes performance and equipment requirements for electronic stability control (ESC) systems on heavy vehicles.

S2 Purpose. The purpose of this standard is to reduce crashes caused by rollover or by directional loss-of-control.

S3 Application. This standard applies to the following vehicles:

S3.1 Truck tractors with a gross vehicle weight rating of greater than 11,793 kilograms (26,000 pounds). However, it does not apply to:

(a) Any truck tractor equipped with an axle that has a gross axle weight rating of 13,154 kilograms (29,000 pounds) or more;

(b) Any truck tractor that has a speed attainable in 3.2 km (2 miles) of not more than 53 km/h (33 mph); and

(c) Any truck tractor that has a speed attainable in 3.2 km (2 miles) of not more than 72 km/h (45 mph), an unloaded vehicle weight that is not less than 95 percent of its gross vehicle weight rating, and no capacity to carry occupants other than the driver and operating crew.

S3.2 Buses with a gross vehicle weight rating of greater than 11,793 kilograms (26,000 pounds). However, it does not apply to

(a) School buses;

(b) Perimeter-seating buses;

(c) Transit buses;

(d) Any bus equipped with an axle that has a gross axle weight rating of 13,154 kilograms (29,000 pounds) or more; and

(e) Any bus that has a speed attainable in 3.2 km (2 miles) of not more than 53 km/h (33 mph.)

S4 Definitions.

Ackerman Steer Angle means the angle whose tangent is the wheelbase divided by the radius of the turn at a very low speed.

Electronic stability control system or *ESC system* means a system that has all of the following attributes:

(1) It augments vehicle directional stability by having the means to apply and adjust the vehicle brake torques individually at each wheel position on at least one front and at least one rear axle of the truck tractor or bus to induce correcting yaw moment to limit vehicle oversteer and to limit vehicle understeer;

(2) It enhances rollover stability by having the means to apply and adjust the vehicle brake torques individually at each wheel position on at least one front and at least one rear axle of the truck tractor or bus to reduce lateral acceleration of a vehicle;

(3) It is computer-controlled with the computer using a closed-loop algorithm to induce correcting yaw moment and enhance rollover stability;

(4) It has a means to determine the vehicle's lateral acceleration;

(5) It has a means to determine the vehicle's yaw rate and to estimate its side slip or side slip derivative with respect to time;

(6) It has a means to estimate vehicle mass or, if applicable, combination vehicle mass;

(7) It has a means to monitor driver steering inputs;

(8) It has a means to modify engine torque, as necessary, to assist the driver in maintaining control of the vehicle and/or combination vehicle; and

(9) When installed on a truck tractor, it has the means to provide brake pressure to automatically apply and modulate the brake torques of a towed trailer.

ESC service brake application means the time when the ESC system applies a service brake pressure at any wheel for a continuous duration of at least 0.5 second of at least 34 kPa (5 psi) for air-braked systems and at least 172 kPa (25 psi) for hydraulic-braked systems.

Initial brake temperature means the average temperature of the service brakes on the hottest axle of the vehicle immediately before any stability control system test maneuver is executed.

Lateral acceleration means the component of the vector acceleration of a point in the vehicle perpendicular to the vehicle x-axis (longitudinal) and parallel to the road plane.

Oversteer means a condition in which the vehicle's yaw rate is greater than the yaw rate that would occur at the vehicle's speed as result of the Ackerman Steer Angle.

Over-the-road bus means a bus characterized by an elevated passenger deck located over a baggage compartment, except a school bus.

Peak friction coefficient or *PFC* means the ratio of the maximum value of braking test wheel longitudinal force to the simultaneous vertical force occurring prior to wheel lockup, as the

braking torque is progressively increased.

Perimeter-seating bus means a bus with 7 or fewer designated seating positions rearward of the driver's seating position that are forward-facing or can convert to forward-facing without the use of tools and is not an over-the-road bus.

Side slip or side slip angle means the arctangent of the lateral velocity of the center of gravity of the vehicle divided by the longitudinal velocity of the center of gravity.

Snub means the braking deceleration of a vehicle from a higher speed to a lower speed that is greater than zero.

Stop-request system means a vehicle-integrated system for passenger use to signal to a vehicle operator that they are requesting a stop.

Transit bus means a bus that is equipped with a stop-request system sold for public transportation provided by, or on behalf of, a State or local government and that is not an over-the-road bus.

Understeer means a condition in which the vehicle's yaw rate is less than the yaw rate that would occur at the vehicle's speed as result of the Ackerman Steer Angle.

Yaw Rate means the rate of change of the vehicle's heading angle measure in degrees per second of rotation about a vertical axis through the vehicle's center of gravity.

S5 Requirements. Each vehicle must be equipped with an ESC system that meets the requirements specified in S5 under the test conditions specified in S6 and the test procedures specified in S7 of this standard.

S5.1 Required Equipment. Each vehicle to which this standard applies must be equipped with an electronic stability control system, as defined in S4.

S5.2 System Operational Capabilities.

S5.2.1 The ESC system must be operational over the full speed range of the vehicle except at vehicle speeds less than 20 km/h (12.4 mph), when being driven in reverse, or during system initialization.

S5.2.2 The ESC must remain capable of activation even if the antilock brake system or traction control is also activated.

S5.3 Performance Requirements.

S5.3.1 Lane Keeping During Reference Speed Determination. During each series of four consecutive test runs conducted at the same entrance speed as part of the test procedure to determine the Preliminary Reference Speed and the Reference Speed (see S7.7.1), the wheels of the truck tractor or bus must

remain within the lane between the start gate (0 degrees of radius arc angle) and the end gate (120 degrees of radius arc angle) during at least two of the four test runs.

S5.3.2 Engine Torque Reduction. During each series of four consecutive test runs for the determination of engine torque reduction (see S7.7.2), the vehicle must satisfy the criteria of S5.3.2.1 and S5.3.2.2 during at least two of the four test runs.

S5.3.2.1 The ESC system must reduce the driver-requested engine torque by at least 10 percent for a minimum continuous duration of 0.5 second during the time period from 1.5 seconds after the vehicle crosses the start gate (0 degree of radius arc angle) to when it crosses the end gate (120 degrees of radius arc angle).

S5.3.2.2 The wheels of the truck tractor or bus must remain within the lane between the start gate (0 degrees of radius arc angle) and the end gate (120 degrees of radius arc angle).

S5.3.3 Roll Stability Control Test. During each series of eight consecutive test runs for the determination of roll stability control (see S7.7.3) conducted at the same entrance speed, the vehicle must satisfy the criteria of S5.3.3.1, S5.3.3.2, S5.3.3.3, and S5.3.3.4 during at least six of the eight consecutive test runs.

S5.3.3.1 The vehicle speed measured at 3.0 seconds after vehicle crosses the start gate (0 degrees of radius arc angle) must not exceed 47 km/h (29 mph).

S5.3.3.2 The vehicle speed measured at 4.0 seconds after vehicle crosses the start gate (0 degrees of radius arc angle) must not exceed 45 km/h (28 mph).

S5.3.3.3 The wheels of the truck tractor or bus must remain within the lane between the start gate (0 degrees of radius arc angle) and the end gate (120 degrees of radius arc angle).

S5.3.3.4 There must be ESC service brake activation.

S5.4 ESC Malfunction Detection. Each vehicle must be equipped with an indicator lamp, mounted in front of and in clear view of the driver, which is activated whenever there is a malfunction that affects the generation or transmission of control or response signals in the vehicle's electronic stability control system.

S5.4.1 Except as provided in S5.4.3 and S5.4.6, the ESC malfunction telltale must illuminate only when a malfunction exists and must remain continuously illuminated for as long as the malfunction exists, whenever the ignition locking system is in the "On" ("Run") position.

S5.4.2 The ESC malfunction telltale must be identified by the symbol shown for "Electronic Stability Control System Malfunction" or the specified words or abbreviations listed in Table 1 of Standard No. 101 (§ 571.101).

S5.4.3 The ESC malfunction telltale must be activated as a check-of-lamp function either when the ignition locking system is turned to the "On" ("Run") position when the engine is not running, or when the ignition locking system is in a position between the "On" ("Run") and "Start" that is designated by the manufacturer as a check-light position.

S5.4.4 The ESC malfunction telltale need not be activated when a starter interlock is in operation.

S5.4.5 The ESC malfunction telltale lamp must extinguish at the next ignition cycle after the malfunction has been corrected.

S5.4.6 The manufacturer may use the ESC malfunction telltale in a flashing mode to indicate ESC operation.

S6 Test Conditions. The requirements of S5 must be met by a vehicle when it is tested according to the conditions set forth in the S6, without replacing any brake system part or making any adjustments to the ESC system except as specified. On vehicles equipped with automatic brake adjusters, the automatic brake adjusters will remain activated at all times.

S6.1 Ambient Conditions.

S6.1.1 The ambient temperature is any temperature between 2 °C (35 °F) and 40 °C (104 °F).

S6.1.2 The maximum wind speed is no greater than 5 m/s (11 mph).

S6.2 Road Test Surface.

S6.2.1 The tests are conducted on a dry, uniform, solid-paved surface. Surfaces with irregularities and undulations, such as dips and large cracks, are unsuitable.

S6.2.2 The road test surface produces a peak friction coefficient (PFC) of 0.9 when measured using an American Society for Testing and Materials (ASTM) E1136-93 (Reapproved 2003) standard reference test tire, in accordance with ASTM Method E 1337-90 (Reapproved 2008), at a speed of 64.4 km/h (40 mph), without water delivery (both documents incorporated by reference, see § 571.5).

S6.2.3 The test surface has a consistent slope between 0% and 1%.

S6.2.4 J-Turn Test Maneuver Test Course. The test course for the J-Turn test maneuver is used for the Reference Speed Test in S7.7.1, the Engine Torque Reduction Test in S7.7.2, and the Roll Stability Control Test in S7.7.3.

S6.2.4.1 The test course consists of a straight entrance lane with a length of 22.9 meters (75 feet) tangentially connected to a curved lane section with a radius of 45.7 meters (150 feet) measured from the center of the lane.

S6.2.4.2 For truck tractors, the lane width of the test course is 3.7 meters (12 feet). For buses, the lane width of the test course is 3.7 meters (12 feet) for the

straight section and is 4.3 meters (14 feet) for the curved section.

S6.2.4.3 The start gate is the tangent point on the radius (the intersection of the straight lane and the curved lane sections) and is designated as zero degrees of radius of arc angle. The end gate is the point on the radius that is 120 degrees of radius arc angle measured from the tangent point.

S6.2.4.4 Figure 1 shows the test course with the curved lane section configured in the counter-clockwise steering direction relative to the entrance lane. The course is also arranged with the curved lane section configured in the clockwise steering direction relative to the entrance lane. The cones depicted in Figure 1 defining the lane width are positioned solely for illustrative purposes.

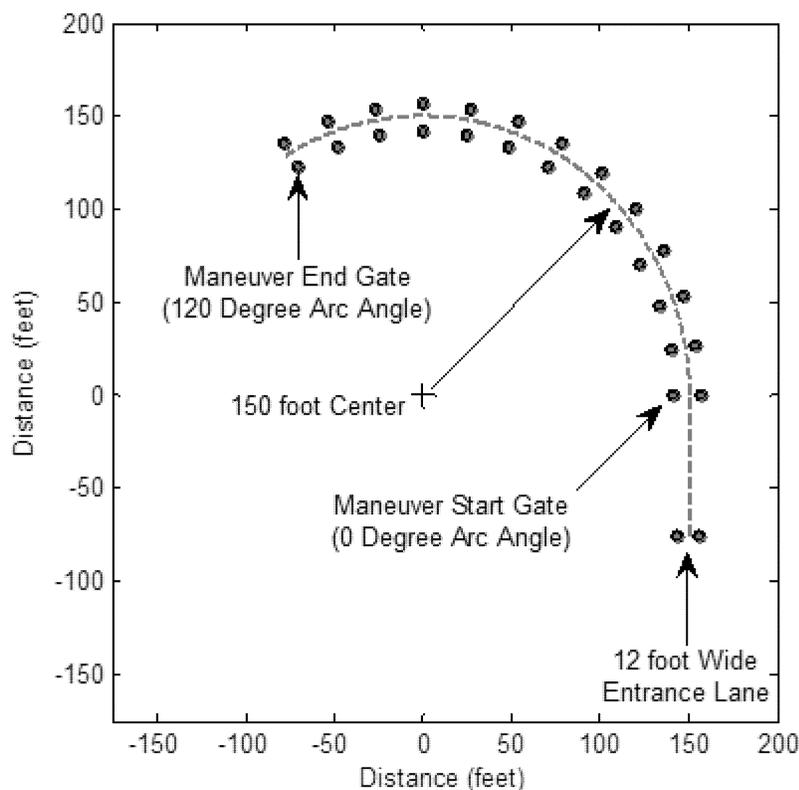


Figure 1. J-Turn Test Maneuver Course (shown with the curved lane section in the counter-clockwise direction)

S6.3 Vehicle Conditions.

S6.3.1 The ESC system is enabled for all testing, except for the ESC malfunction test (see S7.8).

S6.3.2 All vehicle openings (doors, windows, hood, trunk, cargo doors, etc.) are in a closed position except as required for instrumentation purposes.

S6.3.3 Test Weight.

S6.3.3.1 *Truck Tractors.* A truck tractor is loaded to its GVWR by coupling it to a control trailer (see S6.3.5). The tractor is loaded with the test driver, test instrumentation, and an anti-jackknife system (see S6.3.8).

S6.3.3.2 *Buses.* A bus is loaded with ballast (weight) to its GVWR to simulate a multi-passenger and baggage configuration. For this configuration the

bus is loaded with test driver, test instrumentation, outriggers (see S6.3.6), ballast, and a simulated occupant in each of the vehicle's designated seating positions. The simulated occupant loads are attained by securing 68 kilograms (150 pounds) of ballast in each of the test vehicle's designated seating positions. If the simulated occupant loads result in the bus being loaded to less than its GVWR, additional ballast is added to the bus in the following manner until the bus is loaded to its GVWR without exceeding any axle's GAWR: First, ballast is added to the lowest baggage compartment; second, ballast is added to the floor of the passenger compartment. If the simulated occupant loads result in the GAWR of

any axle being exceeded or the GVWR of the bus being exceeded, simulated occupant loads are removed until the vehicle's GVWR and all axles' GAWR are no longer exceeded.

S6.3.4 *Transmission and Brake Controls.* The transmission selector control is in a forward gear during all maneuvers. A vehicle equipped with an engine braking system that is engaged and disengaged by the driver is tested with the system disengaged.

S6.3.5 Control Trailer.

S6.3.5.1 The control trailer is an unbraked, flatbed semi-trailer that has a single axle with a GAWR of 8,165 kg (18,000 lb.). The control trailer has a length of at least 6,400 mm (252 inches), but no more than 7,010 mm (276

inches), when measured from the transverse centerline of the axle to the centerline of the kingpin (the point where the trailer attaches to the truck tractor). At the manufacturer's option, truck tractors with four or more axles may use a control trailer with a length of more than 7,010 mm (276 inches), but no more than 13,208 mm (520 inches) when measured from the transverse centerline of the axle to the centerline of the kingpin.

S6.3.5.2 The location of the center of gravity of the ballast on the control trailer is directly above the kingpin. The height of the center of gravity of the ballast on the control trailer is less than 610 mm (24 inches) above the top of the tractor's fifth-wheel hitch (the area where the truck tractor attaches to the trailer).

S6.3.5.3 The control trailer is equipped with outriggers (see S6.3.6).

S6.3.5.4 A truck tractor is loaded to its GVWR by placing ballast (weight) on the control trailer which loads the tractor's non-steer axles. The control trailer is loaded with ballast without exceeding the GAWR of the trailer axle. If the tractor's fifth-wheel hitch position is adjustable, the fifth-wheel hitch is adjusted to proportionally distribute the load on each of the tractor's axle(s), according to each axle's GAWR, without exceeding the GAWR of any axle(s). If the fifth-wheel hitch position cannot be adjusted to prevent the load from exceeding the GAWR of the tractor's axle(s), the ballast is reduced until the axle load is equal to or less than the GAWR of the tractor's rear axle(s), maintaining load proportioning as close as possible to specified proportioning.

S6.3.6 *Outriggers.* Outriggers are used for testing each vehicle. The outriggers are designed with a maximum weight of 1,134 kg (2,500 lb.), excluding mounting fixtures.

S6.3.7 *Tires.* The tires are inflated to the vehicle manufacturer's specified pressure for the GVWR of the vehicle.

S6.3.8 *Truck Tractor Anti-Jackknife System.* A truck tractor is equipped with an anti-jackknife system that allows a minimum articulation angle of 30 degrees between the tractor and the control trailer.

S6.3.9 *Special Drive Conditions.* A vehicle equipped with an interlocking axle system or a front wheel drive system that is engaged and disengaged by the driver is tested with the system disengaged.

S6.3.10 *Liftable Axles.* A vehicle with one or more liftable axles is tested with the liftable axles down.

S6.3.11 *Initial Brake Temperature.* The initial brake temperature of the hottest brake for any performance test is

between 66 °C (150 °F) and 204 °C (400 °F).

S6.3.12 *Thermocouples.* The brake temperature is measured by plug-type thermocouples installed in the approximate center of the facing length and width of the most heavily loaded shoe or disc pad, one per brake. A second thermocouple may be installed at the beginning of the test sequence if the lining wear is expected to reach a point causing the first thermocouple to contact the rubbing surface of a drum or rotor. The second thermocouple is installed at a depth of 0.080 inch and located within 1.0 inch circumferentially of the thermocouple installed at 0.040 inch depth. For center-grooved shoes or pads, thermocouples are installed within 0.125 inch to 0.250 inch of the groove and as close to the center as possible.

S6.4 *Selection of Compliance Options.* Where manufacturer options are specified, the manufacturer must select the option by the time it certifies the vehicle and may not thereafter select a different option for the vehicle. Each manufacturer shall, upon request from the National Highway Traffic Safety Administration, provide information regarding which of the compliance options it has selected for a particular vehicle or make/model.

S7 *Test Procedure.* **S7.1** *Tire Inflation.* Inflate the vehicle's tires as specified in S6.3.7.

S7.2 *Telltale Lamp Check.* With the vehicle stationary and the ignition locking system in the "Lock" or "Off" position, activate the ignition locking system to the "On" ("Run") position or, where applicable, the appropriate position for the lamp check. The ESC system must perform a check-of-lamp function for the ESC malfunction telltale, as specified in S5.4.3.

S7.3 *Tire Conditioning.* Condition the tires to wear away mold sheen and achieve operating temperature immediately before beginning the J-Turn test runs. The test vehicle is driven around a circle 150 feet (46 meters) in radius at a speed that produces a lateral acceleration of approximately 0.1g for two clockwise laps followed by two counterclockwise laps.

S7.4 *Brake Conditioning and Temperature.* Conditioning and warm-up of the vehicle brakes are completed before and monitored during the execution of the J-Turn test maneuver.

S7.4.1 *Brake Conditioning.* Condition the brakes in accordance with S7.4.1.1 and S7.4.1.2.

S7.4.1.1 Prior to executing the J-Turn test maneuver, the vehicle's brakes are burnished as follows: With the transmission in the highest gear

appropriate for a speed of 64 km/h (40 mph), make 500 snubs between 64 km/h (40 mph) and 32 km/h (20 mph) at a deceleration rate of 0.3g, or at the vehicle's maximum deceleration rate if less than 0.3g. After each brake application accelerate to 64 km/h (40 mph) and maintain that speed until making the next brake application at a point 1.6 km (1.0 mile) from the initial point of the previous brake application. If the vehicle cannot attain a speed of 64 km/h (40 mph) in 1.6 km (1.0 mile), continue to accelerate until the vehicle reaches 64 km/h (40 mph) or until the vehicle has traveled 2.4 km (1.5 miles) from the initial point of the previous brake application, whichever occurs first. The brakes may be adjusted up to three times during the burnish procedure, at intervals specified by the vehicle manufacturer, and may be adjusted at the conclusion of the burnishing, in accordance with the vehicle manufacturer's recommendation.

S7.4.1.2 Prior to executing the performance tests in S7.7, the brakes are conditioned using 40 brake application snubs from a speed of 64 km/h (40 mph) to a speed of 32 km/h (20 mph), with a target deceleration of approximately 0.3g. After each brake application, accelerate to 64 km/h (40 mph) and maintain that speed until making the next brake application at a point 1.6 km (1.0 mile) from the initial point of the previous brake application.

S7.4.2 *Brake Temperature.* Prior to testing or any time during testing, if the hottest brake temperature is above 204°C (400 °F) a cool down period is performed until the hottest brake temperature is measured within the range of 66°C–204°C (150 °F–400 °F). Prior to testing or any time during testing, if the hottest brake temperature is below 66°C (150 °F) individual brake stops are repeated to increase any one brake temperature to within the target temperature range of 66°C–204°C (150 °F–400 °F) before a test maneuver is performed.

S7.5 *Mass Estimation Cycle.* Perform the mass estimation procedure for the ESC system according to the manufacturer's instructions. This procedure will be repeated if an ignition cycle occurs or is needed at any time between the initiation and completion of S7.7.

S7.6 *ESC System Malfunction Check.* Check that the ESC system is enabled by ensuring that the ESC malfunction telltale is not illuminated.

S7.7 *J-Turn Test Maneuver.* The truck tractor or bus is subjected to multiple series of test runs using the J-Turn test maneuver. The truck tractor or bus

travels through the course by driving down the entrance lane, crossing the start gate at the designated entrance speed, turning through the curved lane section, and crossing the end gate, while the driver attempts to keep all of the wheels of the truck tractor or bus within the lane.

S7.7.1 Reference Speed Test. The vehicle is subjected to J-Turn test maneuvers to determine the Reference Speed for each steering direction. The Reference Speeds are used in S7.7.2 and S7.7.3.

S7.7.1.1 Preliminary Reference Speed Determination. The vehicle is subjected to two series of test runs using the J-Turn test maneuver at increasing entrance speeds. One series uses clockwise steering, and the other series uses counterclockwise steering. The entrance speed of a test run is the 0.5 second average of the raw speed data prior to any ESC system activation of the service brakes and rounded to the nearest 1.0 mph. During each test run, the driver attempts to maintain the selected entrance speed throughout the J-Turn test maneuver. For the first test run of each series, the entrance speed is $32 \text{ km/h} \pm 1.6 \text{ km/h}$ ($20 \text{ mph} \pm 1.0 \text{ mph}$) and is incremented 1.6 km/h (1.0 mph) for each subsequent test run until ESC service brake application occurs or any of the truck tractor's or bus's wheels departs the lane. The vehicle entrance speed at which ESC service brake application occurs is the Preliminary Reference Speed. The Preliminary Reference Speed is determined for each direction: Clockwise steering and counter-clockwise steering. During any test run, if any of the wheels of the truck tractor or bus depart the lane at any point within the first 120 degrees of radius arc angle, the test run is repeated at the same entrance speed. If any of the wheels of the truck tractor or bus depart the lane again, then four consecutive test runs are repeated at the same entrance speed ($\pm 1.6 \text{ km/h}$ ($\pm 1.0 \text{ mph}$)).

S7.7.1.2 Reference Speed Determination. Using the Preliminary Reference Speed determined in S7.7.1.1, perform two series of test runs using the J-Turn test maneuver to determine the Reference Speed. The first series consists of four consecutive test runs performed using counter-clockwise steering. The second series consists of four consecutive test runs performed using clockwise steering. During each test run, the driver attempts to maintain a speed equal to the Preliminary Reference Speed throughout the J-Turn test maneuver. The Reference Speed is the minimum entrance speed at which ESC service brake application occurs for at least two of four consecutive test runs

of each series conducted at the same entrance speed (within $\pm 1.6 \text{ km/h}$ ($\pm 1.0 \text{ mph}$)). The Reference Speed is determined for each direction: clockwise steering and counter-clockwise steering. If ESC service brake application does not occur during at least two test runs of either series, the Preliminary Reference Speed is increased by 1.6 km/h (1.0 mph), and the procedure in this section is repeated.

S7.7.2 Engine Torque Reduction Test. The vehicle is subjected to two series of test runs using the J-Turn test maneuver at an entrance speed equal to the Reference Speed determined in S7.7.1.2. One series uses clockwise steering, and the other series uses counter-clockwise steering. Each series consists of four test runs with the vehicle at an entrance speed equal to the Reference Speed and the driver fully depressing the accelerator pedal from the time when the vehicle crosses the start gate until the vehicle reaches the end gate. ESC engine torque reduction is confirmed by comparing the engine torque output and driver requested torque data collected from the vehicle communication network or CAN bus. During the initial stages of each maneuver the two torque signals with respect to time will parallel each other. Upon ESC engine torque reduction, the two signals will diverge when the ESC system causes a commanded engine torque reduction and the driver depresses the accelerator pedal attempting to accelerate the vehicle.

S7.7.2.1 Perform two series of test runs using the J-Turn test maneuver at the Reference Speed determined in S7.7.1.2 ($\pm 1.6 \text{ km/h}$ ($\pm 1.0 \text{ mph}$)). The first series consists of four consecutive test runs performed using counter-clockwise steering. The second series consists of four consecutive test runs performed using clockwise steering. During each test run, the driver fully depresses the accelerator pedal from the time when the vehicle crosses the start gate until the vehicle reaches the end gate.

S7.7.2.2 During each of the engine torque reduction test runs, verify the commanded engine torque and the driver requested torque signals diverge according to the criteria specified in S5.3.2.1.

S7.7.3 Roll Stability Control Test. The vehicle is subjected to multiple series of test runs using the J-Turn test maneuver in both the clockwise and the counter-clockwise direction.

S7.7.3.1 Before each test run, the brake temperatures are monitored and the hottest brake is confirmed to be between $66 \text{ }^\circ\text{C}$ ($150 \text{ }^\circ\text{F}$) and $204 \text{ }^\circ\text{C}$

($400 \text{ }^\circ\text{F}$). If the hottest brake temperature is not between $66 \text{ }^\circ\text{C}$ ($150 \text{ }^\circ\text{F}$) and $204 \text{ }^\circ\text{C}$ ($400 \text{ }^\circ\text{F}$), the brake temperature is adjusted in accordance with S7.4.2.

S7.7.3.2 During each test run, the driver will release the accelerator pedal after the ESC system has slowed vehicle by more than 4.8 km/h (3.0 mph) below the entrance speed.

S7.7.3.3 The maximum test speed is the greater of 130 percent of the Reference Speed (see S7.7.1.2) or 48 km/h (30 mph). The maximum test speed is determined for each direction: clockwise steering and counter-clockwise steering.

S7.7.3.4 For each series of Roll Stability Control test runs, the vehicle will perform eight consecutive test runs at the same entrance speed, which is any speed between 48 km/h (30 mph) and the maximum test speed determined according to S7.7.3.3.

S7.7.3.5 Upon completion of testing, post processing is done as specified in S7.9.

S7.8 ESC Malfunction Detection.

S7.8.1 Simulate one or more ESC malfunction(s) by disconnecting the power source to any ESC component, or disconnecting any electrical connection between ESC components (with the vehicle power off). When simulating an ESC malfunction, the electrical connections for the telltale lamp(s) are not disconnected.

S7.8.2 With the vehicle initially stationary and the ignition locking system in the "Lock" or "Off" position, activate the ignition locking system to the "Start" position and start the engine. Place the vehicle in a forward gear and accelerate to $48 \pm 8 \text{ km/h}$ ($30 \pm 5 \text{ mph}$). Drive the vehicle for at least two minutes including at least one left and one right turning maneuver and at least one service brake application. Verify that, within two minutes of attaining this speed, the ESC malfunction indicator illuminates in accordance with S5.4.

S7.8.3 Stop the vehicle, deactivate the ignition locking system to the "Off" or "Lock" position. After a five-minute period, activate the vehicle's ignition locking system to the "Start" position and start the engine. Verify that the ESC malfunction indicator again illuminates to signal a malfunction and remains illuminated as long as the engine is running until the fault is corrected.

S7.8.4 Deactivate the ignition locking system to the "Off" or "Lock" position. Restore the ESC system to normal operation, activate the ignition system to the "Start" position and start the engine. Verify that the telltale has extinguished.

S7.9 Post Data Processing.

S7.9.1 Raw vehicle speed data is filtered with a 0.1 second running average filter.

S7.9.2 The torque data collected from the vehicle communication network or CAN bus as a digital signal does not get filtered. The torque data collected from the vehicle communication network or CAN bus as an analog signal is filtered with a 0.1-second running average.

S7.9.3 The activation point of the ESC engine torque reduction is the point where the measured driver demanded torque and the engine torque first begin to deviate from one another (engine torque decreases while the driver requested torque increases) during the Engine Torque Reduction Test. The torque values are obtained directly from the vehicle communication network or CAN bus. Torque values used to determine the activation point of the ESC engine torque reduction are interpolated.

S7.9.4 The time measurement for the J-Turn test maneuver is referenced to "time zero", which is defined as the

instant the center of the front tires of the vehicle reach the start gate, the line within the lane at zero degrees of radius arc angle. The completion of the maneuver occurs at the instant the center of the front tires of the vehicle reach the end gate, which is the line within the lane at 120 degrees of radius arc angle.

S7.9.5 Raw service brake pressure measurements are zeroed (calibrated). Zeroed brake pressure data are filtered with 0.1 second running average filters. Zeroed and filtered brake pressure data are dynamically offset corrected using a defined "zeroed range". The "zeroing range" is defined as the 0.5 second time period prior to "time zero" defined in S7.9.4.

S8 Compliance Dates. Vehicles that are subject to this standard must meet the requirements of this standard according to the implementation schedule set forth in S8.

S8.1 Buses.

S8.1.1 All buses with a gross vehicle weight rating of greater than 14,969

kilograms (33,000 pounds) manufactured on or after June 24, 2018 must comply with this standard.

S8.1.2 All buses manufactured on or after August 1, 2019 must comply with this standard.

S8.2 Trucks.

S8.2.1 All three-axle truck tractors with a front axle that has a GAWR of 6,622 kilograms (14,600 pounds) or less and with two rear drive axles that have a combined GAWR of 20,412 kilograms (45,000 pounds) or less manufactured on or after August 1, 2017 must comply with this standard.

S8.2.2 All truck tractors manufactured on or after August 1, 2019 must comply with this standard.

Issued on June 3, 2015, in Washington, DC, under authority delegated in 49 CFR 1.95 and 501.5.

Mark R. Rosekind,
Administrator.

[FR Doc. 2015-14127 Filed 6-22-15; 8:45 am]

BILLING CODE 4910-59-P